



40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF

TECHNICAL DATA SHEET

PE15A4072

The PE15A4072 is a medium power amplifier, operating from 20 to 1000 MHz and designed for use in a wide range of general purpose applications. Typical performance includes 4 Watt of output P1dB and 38 dB small signal gain. This power amplifier requires a +24V DC supply, is unconditionally stable, and operates over the temperature range of -40°C to 85°C. The thin film assembly features rugged stripline construction with select GaAs FET devices and the package supports field replaceable SMA connectors.

Features

- 20 to 1000 MHz Frequency Range
- P1dB 4 Watt min.
- Small Signal Gain: 38 dB min.
- Gain Flatness: ± 0.5 dB typ.
- IP3: 47 dBm typ.
- 50 Ohm Input and Output Matched
- 0 to 50°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Field Replaceable SMA Female connectors

Applications

- Electronic Warfare
- Electronic Countermeasures
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems
- Satellite Communications
- Microwave Radio Systems
- Driver Amplifier
- High Power Output Amplifier

Electrical Specifications (TA = +25°C, DC Voltage = 24Volts)

Description	Minimum	Typical	Maximum	Units
Frequency Range	20		1,000	MHz
Small Signal Gain	38	40		dB
Gain Flatness		± 0.5		dB
Output Power at 1 dB Compression Point	+35	+36		dBm
Output 3rd Order Intercept Point		+44		dBm
Noise Figure		6	7	dB
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage		24		Volts
Quiescent Current		630	700	mA

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](#)

40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High
Power Amplifier, SMA, 44 dBm IP3, 6 dB NF



TECHNICAL DATA SHEET

PE15A4072

Absolute Maximum Rating

Parameter	Rating	Units
RF Input Power	+10	dBm
Supply Voltage	+28	V
Operating Temperature	-30 to +65	°C
Storage Temperature	-55 to +100	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

Length	3.75 in [95.25 mm]
Width	2 in [50.8 mm]
Height	1.913 in [48.59 mm]
Input Connector	SMA Female
Output Connector	SMA Female
Bias Connector	Solder Pin

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](#)



40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High
Power Amplifier, SMA, 44 dBm IP3, 6 dB NF

TECHNICAL DATA SHEET

PE15A4072

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](#)




40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF

TECHNICAL DATA SHEET

PE15A4072

Typical Performance Data

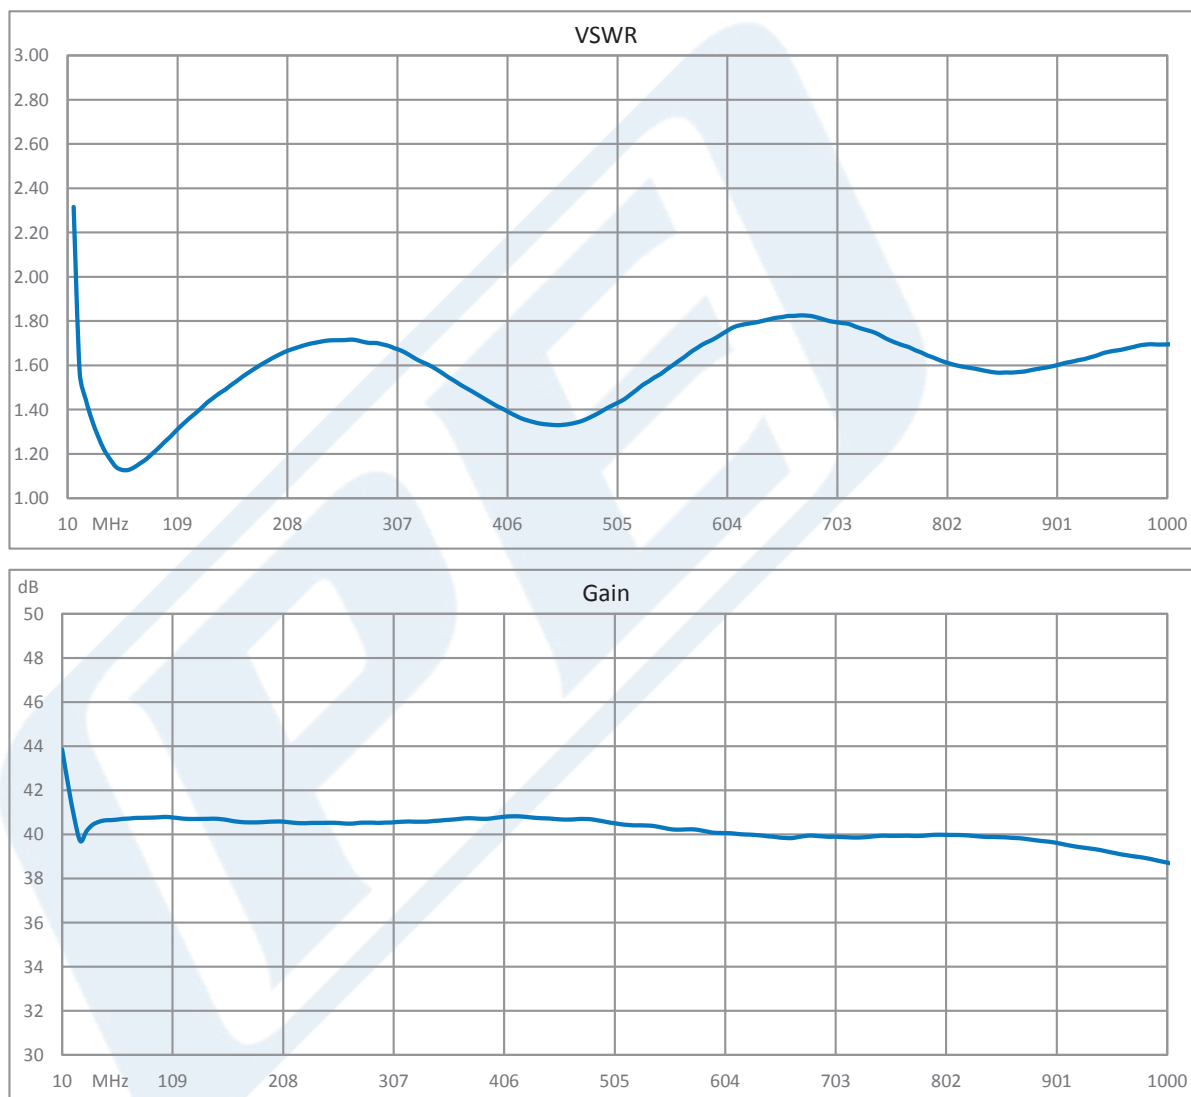


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](#)



40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF

TECHNICAL DATA SHEET

PE15A4072

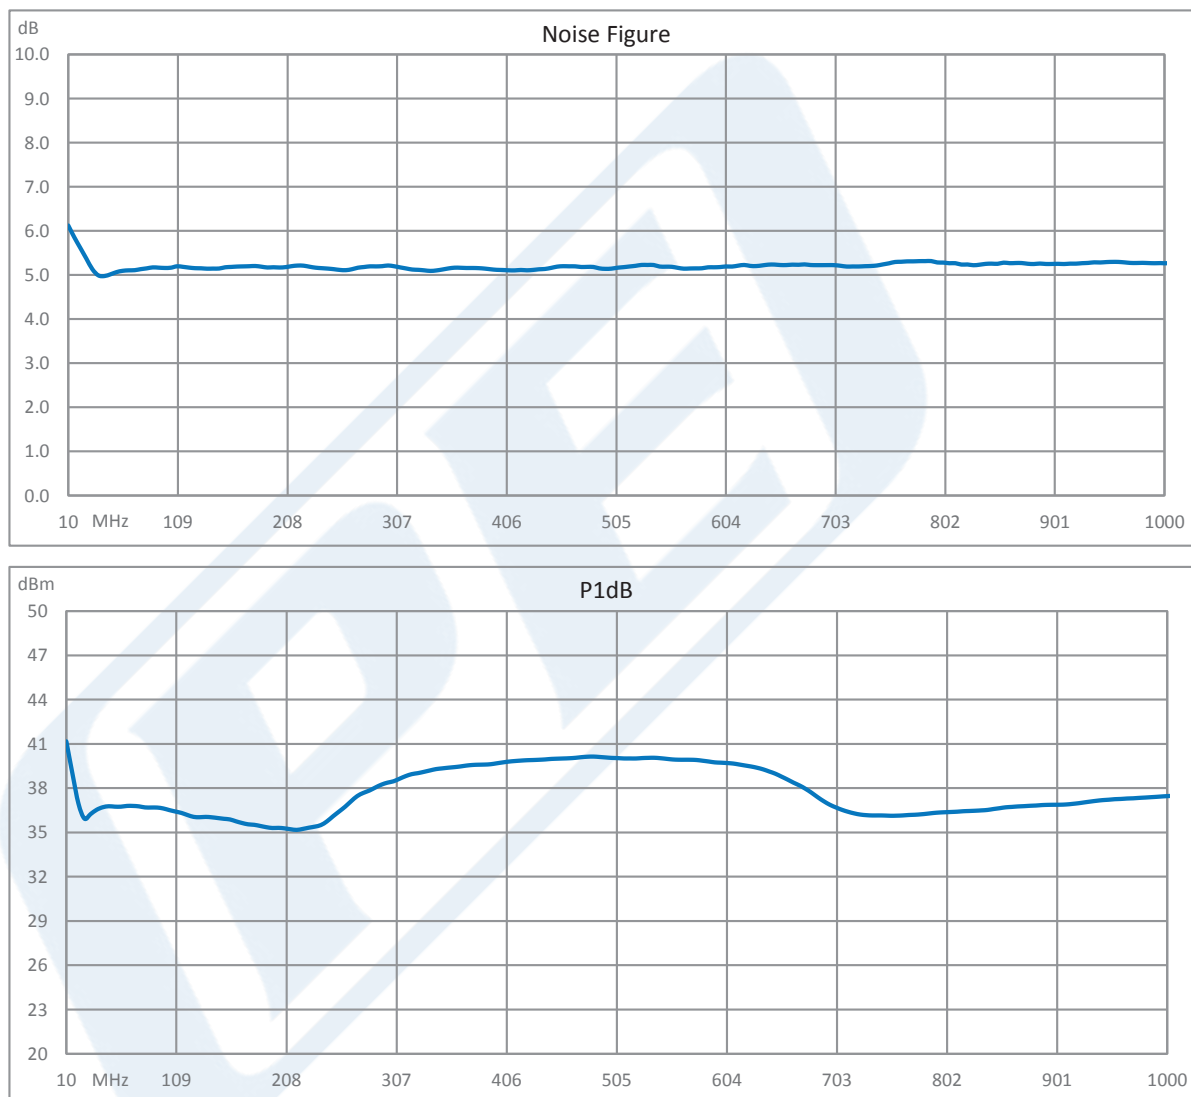


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](#)



40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High
Power Amplifier, SMA, 44 dBm IP3, 6 dB NF

TECHNICAL DATA SHEET

PE15A4072

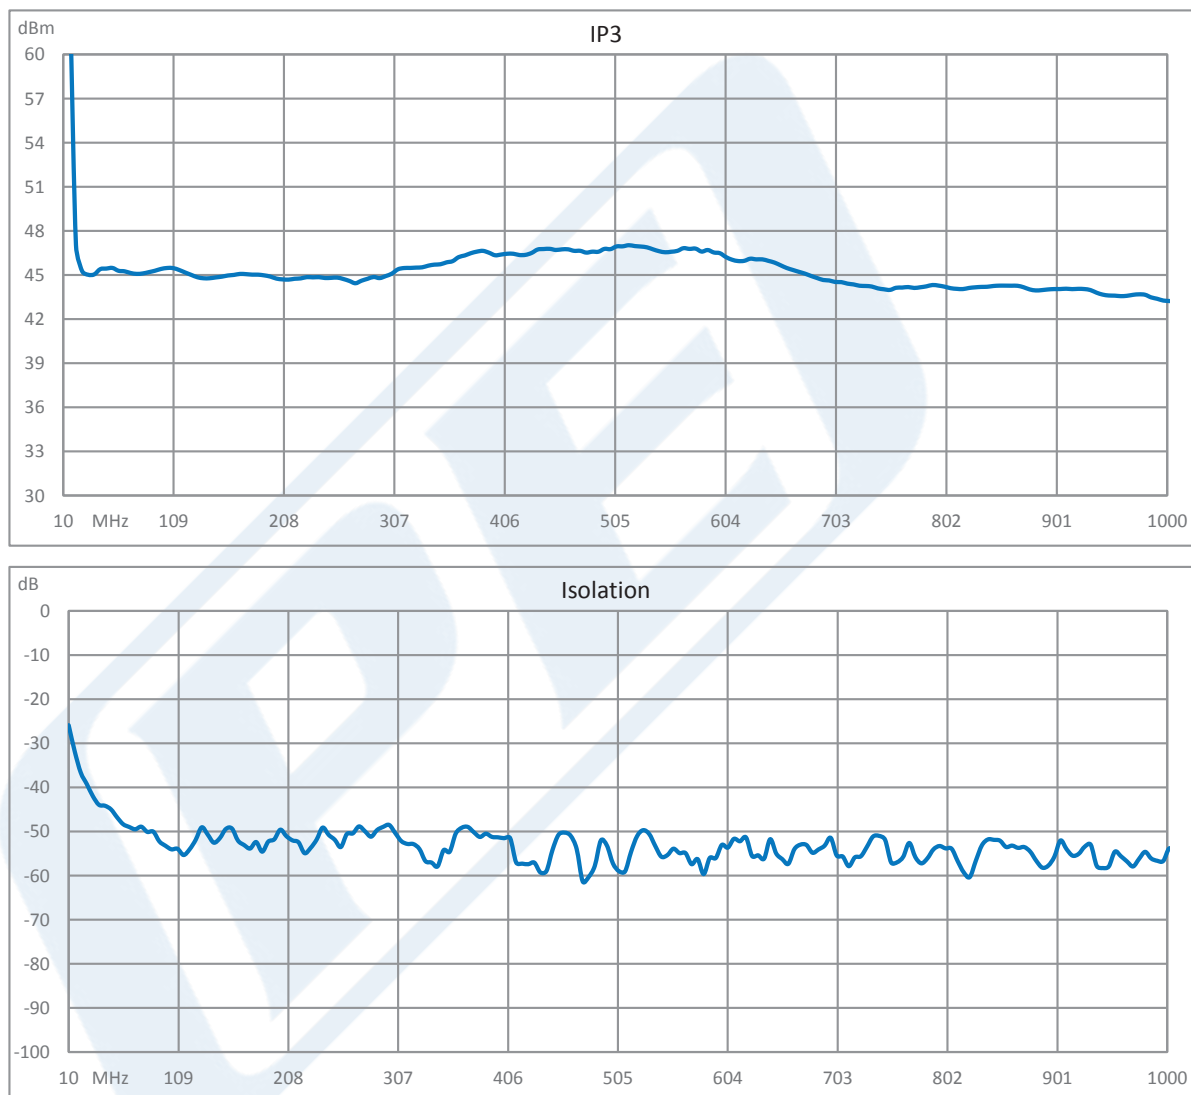

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](#)



40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High
Power Amplifier, SMA, 44 dBm IP3, 6 dB NF

TECHNICAL DATA SHEET

PE15A4072

40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power Amplifier, SMA, 44 dBm IP3, 6 dB NF PE15A4072](https://www.pasternack.com/40-db-gain-1-ghz-high-power-high-gain-amplifier-sma-pe15a4072-p.aspx)

URL: <https://www.pasternack.com/40-db-gain-1-ghz-high-power-high-gain-amplifier-sma-pe15a4072-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A4072 CAD Drawing

40 dB Gain, 4 Watt P1dB, 20 MHz to 1 GHz, High Power
Amplifier, SMA, 44 dBm IP3, 6 dB NF

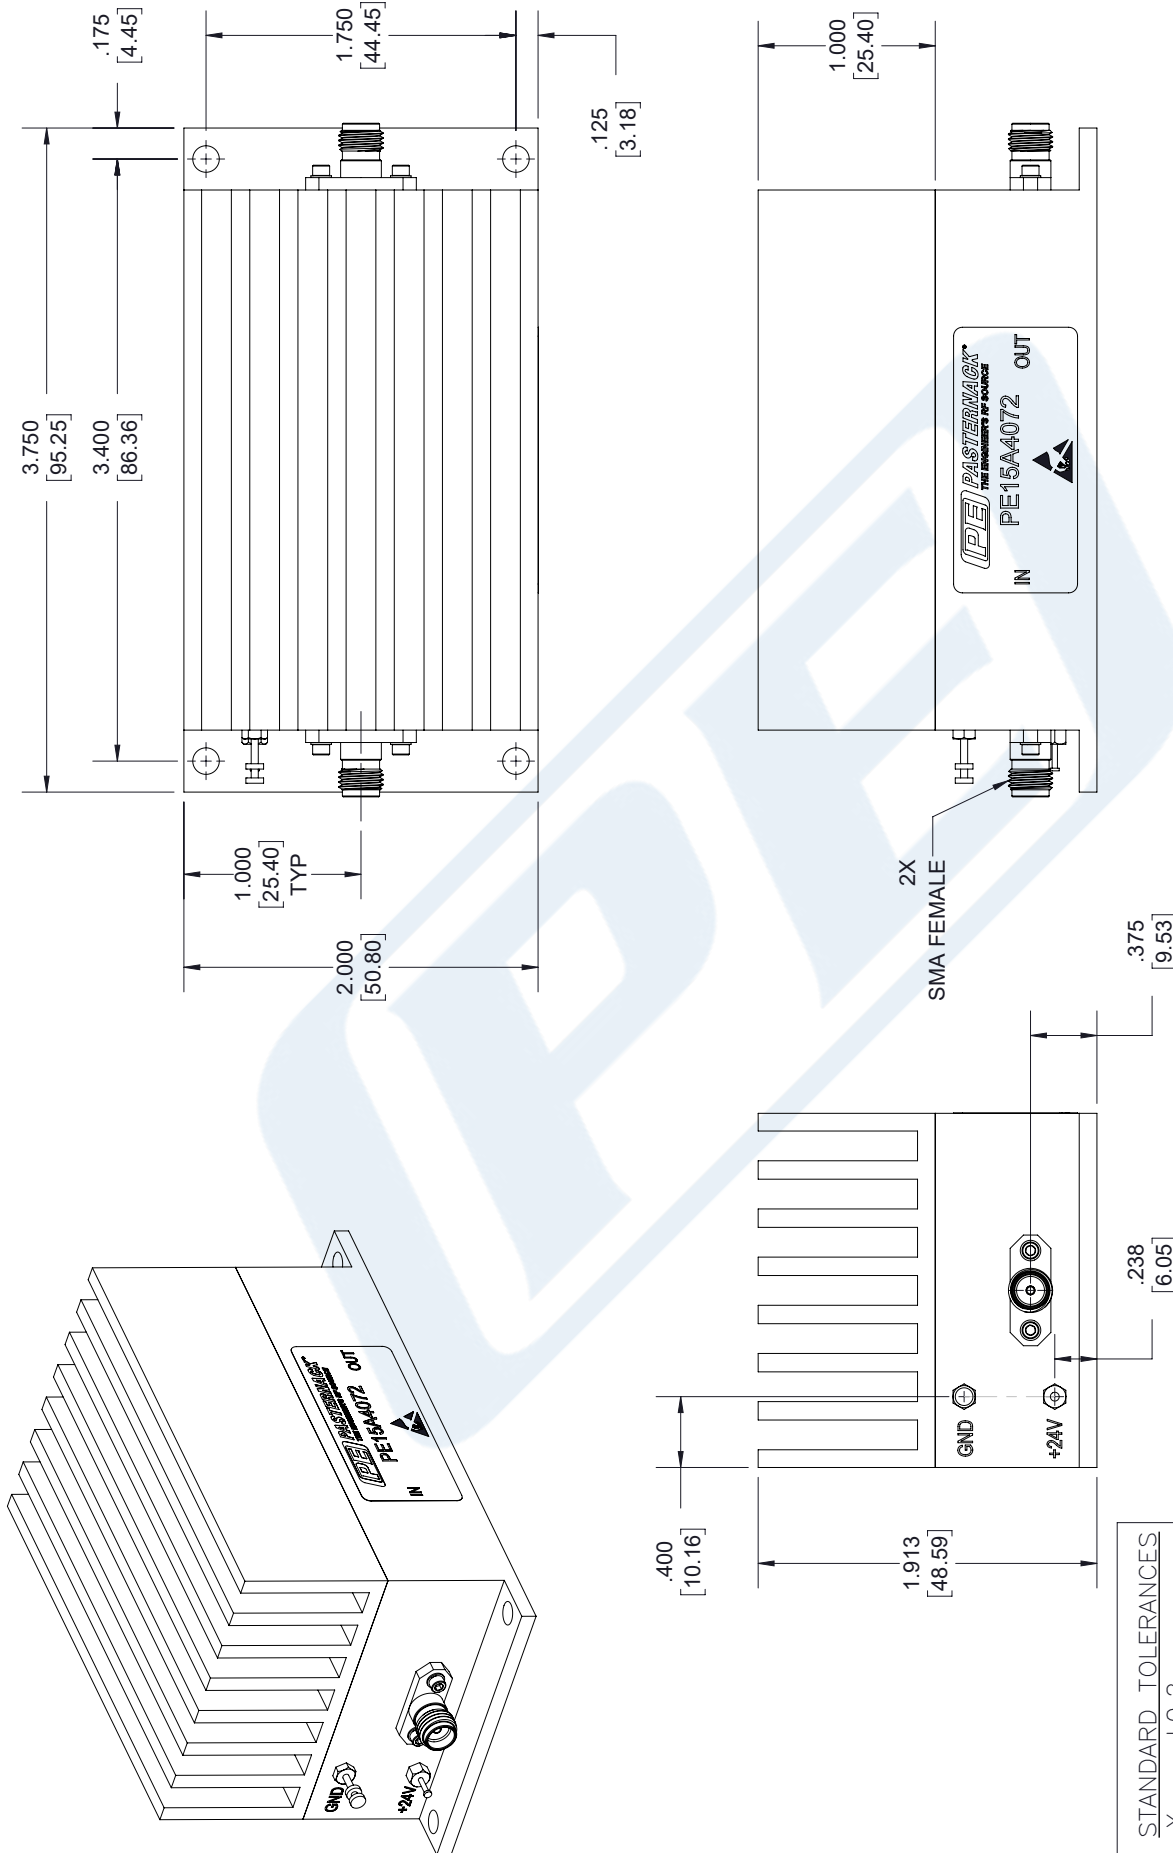

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE15A4072

CAGE CODE 53919

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

7361

SIZE A

SCALE N/A

CAD FILE 04/26/18