



58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output

TECHNICAL DATA SHEET

PE15A5016

PE15A5016 is a Wideband GaN amplifier that is ideal for linear application including 5 W of Linear COFDM Power for video and UAV/UGV data links. The amplifier can provide over 20 W of analog FM power. The high gain power coaxial amplifier operating in the 6.4 to 7.1 GHz frequency range and high 58 dB typical small signal gain with the gain flatness of ± 2 dB typical. The driver amplifier requires typically a +33V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -10°C and +85°C.

Features

- 6.4 GHz to 7.1 GHz Frequency Range
- Psat 20 W Typ
- Linear COFDM Power Output 5 W
- Small Signal Gain: 58 dB min
- Gain Flatness: ± 2 typical
- 50 Ohms Input and Output Matched
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Overvoltage Protection
- Thermal Protection

Applications

- COFDM Video
- Analog FM Communications
- UAV/UGV Data Link
- L-band Military Radar
- Communication Systems
- High Gain Driver Power Amplifier
- High Gain Output Power Amplifier

Electrical Specifications (TA = +25°C, DC Voltage = 33Volts)

| Description | Minimum | Typical | Maximum | Units |
|-----------------------------|---------|---------|---------|-------|
| Frequency Range | 6.4 | | 7.1 | GHz |
| Small Signal Gain | | 58 | | dB |
| Gain Flatness | | ± 2 | | dB |
| Pout at Sat. | | +43 | | dBm |
| Linear COFDM Power Output | | +37 | | dBm |
| Impedance (Input) | | 50 | | Ohms |
| Impedance (Output) | | 50 | | Ohms |
| Input Return Loss | | -15 | -14 | dB |
| Operating DC Voltage | | | 33 | Volts |
| Quiescent Current | | 750 | | mA |
| Operating Current at | | 2.3 | | A |
| Operating Temperature Range | -10 | | +85 | °C |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output PE15A5016](#)



58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output

TECHNICAL DATA SHEET

PE15A5016

Protections

| Protections | |
|----------------------|--|
| Description | Value |
| Max RF Input | +10 dBm |
| Load VSWR @ 20 Watts | ∞ at all amplitudes / phase angles |
| Thermal Shutdown | Unit will shut down if case temperature exceeds +85°C, will automatically turn back on when case temperature falls ~ 10°C from shutdown. |
| Over Voltage | Unit will shut down if input voltage exceeds +33 VDC |
| Under Voltage | Unit requires a minimum of +9 VDC to enable. Unit will also shut down if VDC falls below +9 V during operation. |
| True Reverse | Unit will not enable and the unit will not draw current if +VDC and Ground are reversed ³ |

Mechanical Specifications

Size

| | |
|------------------|---|
| Length | 6 in [152.4 mm] |
| Width | 2.5 in [63.5 mm] |
| Height | 1.06 in [26.92 mm] |
| Weight | 1.125 lbs [510.29 g] |
| Input Connector | SMA Female |
| Output Connector | SMA Female |
| Cooling | HEATSINK REQUIRED use PE15C5013 or PE15G5011F |

Environmental Specifications

Temperature

| | |
|-----------------|---------------------------|
| Operating Range | -10 to +85 deg C |
| Storage Range | -55 to +100 deg C |
| Humidity | 95 |
| Shock | MIL-STD-810F Method 516.5 |
| Vibration | MIL-STD-810F Method 516.5 |
| Altitude | MIL-STD-810F Method 500.4 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output PE15A5016](#)



58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High
Power GaN Amplifier, SMA Input, SMA Output

TECHNICAL DATA SHEET

PE15A5016

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output PE15A5016](#)



58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High
Power GaN Amplifier, SMA Input, SMA Output

TECHNICAL DATA SHEET

PE15A5016

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output PE15A5016](#)





58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output

TECHNICAL DATA SHEET

PE15A5016

Typical Performance Data

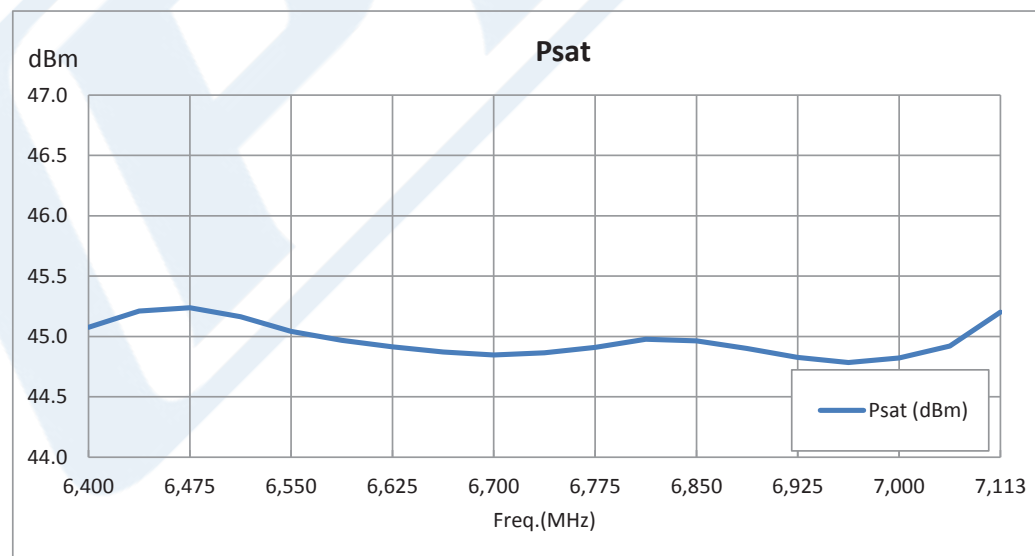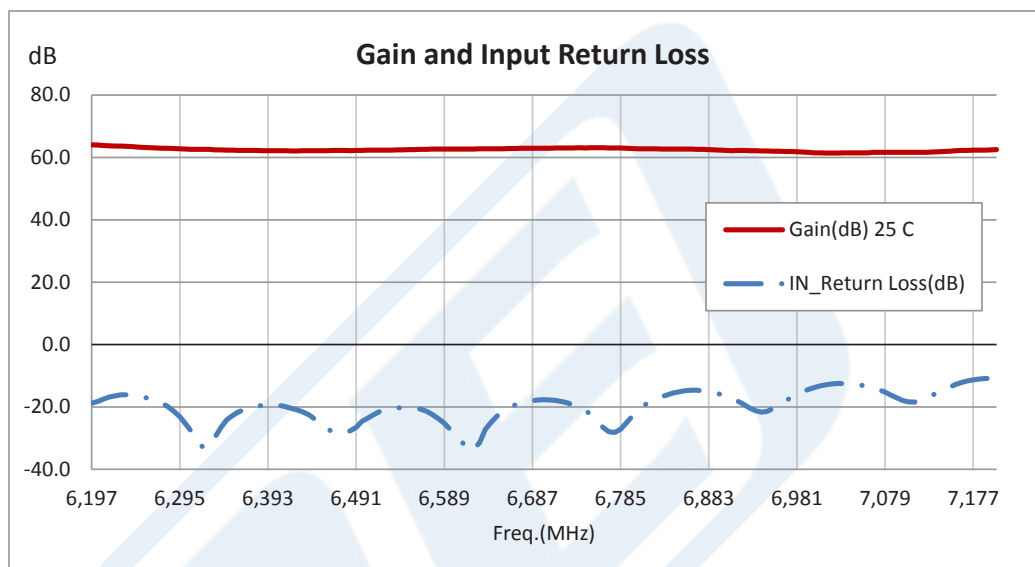

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output PE15A5016](#)



58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High
Power GaN Amplifier, SMA Input, SMA Output

TECHNICAL DATA SHEET

PE15A5016

58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output PE15A5016](https://www.pasternack.com/58-db-gain-7.1-ghz-high-power-high-gain-amplifier-sma-pe15a5016-p.aspx)

URL: <https://www.pasternack.com/58-db-gain-7.1-ghz-high-power-high-gain-amplifier-sma-pe15a5016-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A5016 CAD Drawing

58 dB Gain, 20 Watt Psat, 6.4 GHz to 7.1 GHz, High Power GaN Amplifier, SMA Input, SMA Output

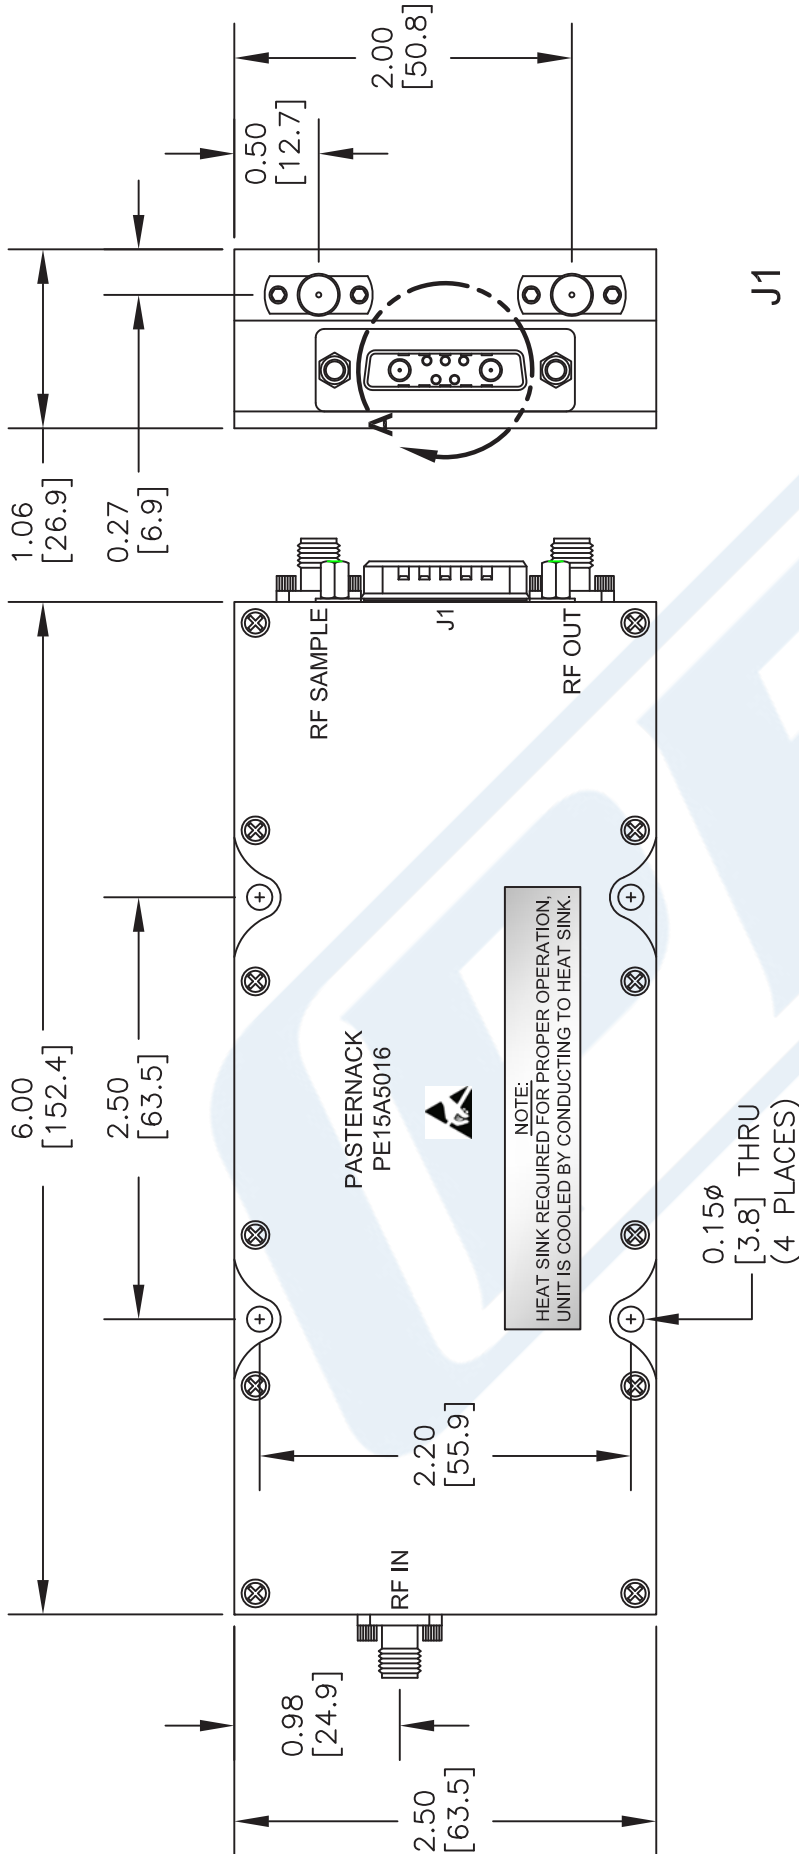

J1



View A

| PIN | DESCRIPTION | SPECIFICATION |
|-----|-------------------------|---|
| A1 | Ground | VDC Ground |
| A2 | +VDC | +9 to +33 VDC |
| 1 | Temperature Sensor | .75V at +25°C, 1V at +50°C, 1.25V at +75° ($\pm 0.05V$) |
| 2 | Amplifier Enable | Enable: +5V TTL High, Disable: 0V TTL Low ($\pm 5.5V$ Max) |
| 3 | Reverse Power Detection | +2.5V @ +35 dBm in Open Condition |
| 4 | Ground | VDC Ground |
| 5 | Forward Power Detection | +2.5V @ +35 dBm |

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE15A5016

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 110614

SCALE N/A

SIZE A

2233