



WR-137 CPR-137G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1017

Features

- C Band
- 5.85 to 8.2 GHz Frequency Range
- WR-137 Waveguide Interface

- · Grooved CPR-137G Flange
- · N Female RF Interface

Applications

- Test Benches
- Radar

- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1017 is a waveguide to coaxial adapter operating in the C Band with a 5.85 to 8.2 GHz frequency range. This adapter offers a WR-137 waveguide interface size using a Grooved CPR-137G Flange. The PEWCA1017 is constructed of Copper Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a N Female Nickel Plated Brass Connector.

Configuration

Waveguide Size Flange RF Connector Impedance Body Geometry WR-137 CPR-137G N Female 50 Ohms Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	5.85		8.2	GHz
VSWR		1.25:1		

Mechanical Specifications

Weight 0.537 lbs [243.58 g]

RF Connector

Connector Type N Female
Body Material and Plating Brass, Nickel

Waveguide Interface

Waveguide Type WR-137
Flange Type CPR-137G
Body Material and Plating Copper Alloy, Paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-137 CPR-137G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band PEWCA1017

ISO 9001 : 2008 Registered



WR-137 CPR-137G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band



Waveguide to Coax Adapters Technical Data Sheet

PEWCA1017


Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

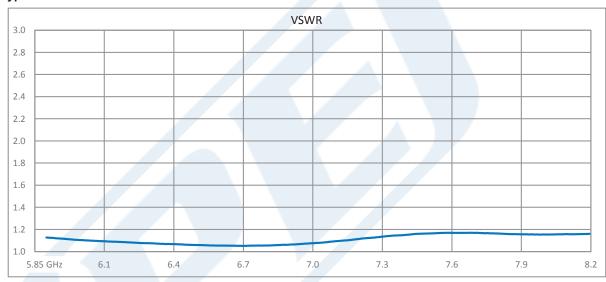

WR-137 CPR-137G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-137 CPR-137G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band PEWCA1017

URL: https://www.pasternack.com/wr-137-cpr-137g-grooved-n-female-waveguide-coax-adapter-8.2-ghz-pewca1017-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PEWCA1017 CAD Drawing

WR-137 CPR-137G Grooved Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band

