



BNC Male to BNC Male Cable 60 Inch  
Length Using 75 Ohm RG59 Coax

RF Cable Assemblies Technical Data Sheet

PE3075-60

**Configuration**

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: RG59

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		20.6 [67.59]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Max.)	0.29	0.38	0.46	0.59	0.78	dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

**Mechanical Specifications**

**Cable Assembly**

Length*	60 in [152.4 cm]
Diameter	0.571 in [14.5 mm]
Weight	2.004 lbs [909 g]

**Cable**

Cable Type	RG59
Impedance	75 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 60 Inch Length Using 75 Ohm RG59 Coax PE3075-60](#)



BNC Male to BNC Male Cable 60 Inch  
Length Using 75 Ohm RG59 Coax

RF Cable Assemblies Technical Data Sheet

PE3075-60

Jacket Material  
Jacket Diameter

PVC (NC), Black  
0.242 in [6.15 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range

-40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 60 Inch Length Using 75 Ohm RG59 Coax PE3075-60](#)



BNC Male to BNC Male Cable 60 Inch  
Length Using 75 Ohm RG59 Coax

RF Cable Assemblies Technical Data Sheet

PE3075-60

**How to Order**

Part Number Configuration:

**PE3075**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3075-12 = 12 inches long cable  
PE3075-100cm = 100 cm long cable

BNC Male to BNC Male Cable 60 Inch Length Using 75 Ohm RG59 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 60 Inch Length Using 75 Ohm RG59 Coax PE3075-60](#)

URL: <https://www.pasternack.com/bnc-male-bnc-male-rg59bu-cable-assembly-pe3075-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3075-60 CAD Drawing

BNC Male to BNC Male Cable 60 Inch Length Using 75 Ohm RG59 Coax

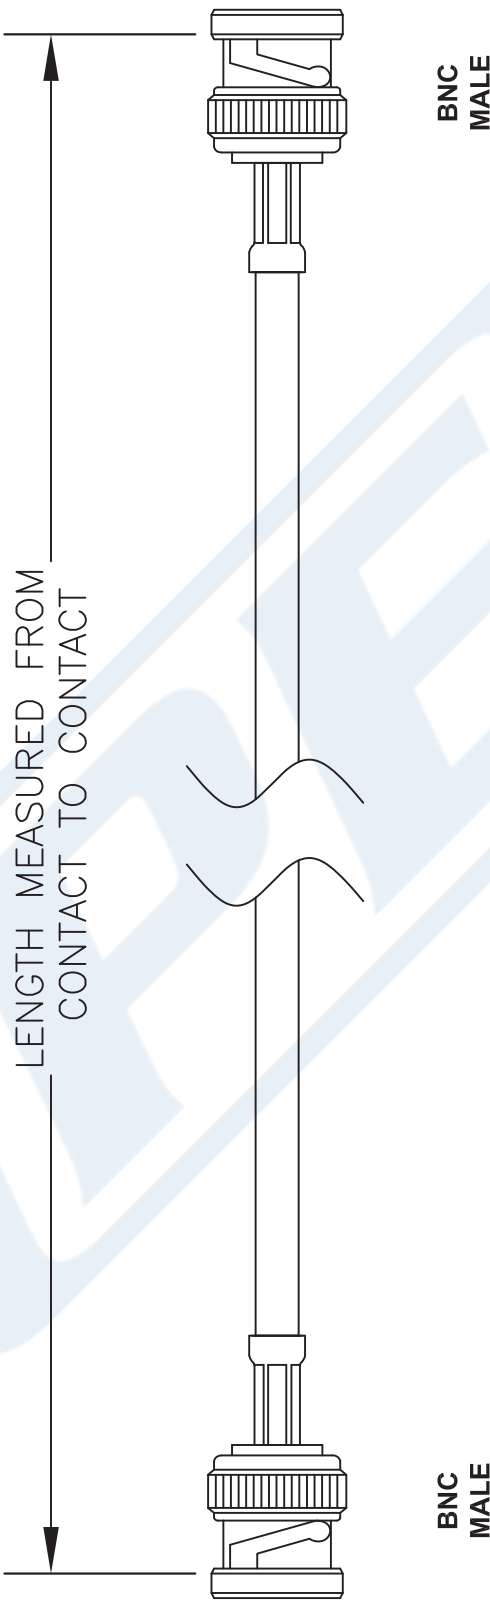

STANDARD TOLERANCES			
.X	±0.2		
.XX	±0.1		
.XXX	±0.05		

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



**PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

PE3075

FSCM NO. 53919

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 100516

SCALE N/A

SIZE A

41742