



SMA Male Right Angle to SMA Male Right Angle Cable  
18 Inch Length Using PE-SR401AL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE34215LF-18

### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: PE-SR401AL-STRAIGHT

### Features

- Max Frequency 8 GHz
- 69.5% Phase Velocity

### Applications

- General Purpose
- Laboratory Use

### Description

Pasternack's PE34215LF-18 SMA male right angle to SMA male right angle 18 inch cable using PE-SR401AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm semi-rigid PE-SR401AL-STRAIGHT coax. The PE34215LF-18 SMA male to SMA male cable assembly operates to 8 GHz. The right angle SMA interfaces on the PE-SR401AL-STRAIGHT cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description                          | Minimum | Typical      | Maximum | Units        |
|--------------------------------------|---------|--------------|---------|--------------|
| Frequency Range                      | DC      |              | 8       | GHz          |
| Velocity of Propagation              |         | 69.5         |         | %            |
| Capacitance                          |         | 29.6 [97.11] |         | pF/ft [pF/m] |
| Dielectric Withstanding Voltage (AC) |         |              | 7,500   | Vrms         |

### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5 | Units |
|-----------------------|------|------|------|------|----|-------|
| Frequency             | 0.4  | 1    | 5    | 8    |    | GHz   |
| Insertion Loss (Typ.) | 0.47 | 0.51 | 0.73 | 0.83 |    | dB    |
| Power Handling (Max.) | 962  | 661  | 265  | 200  |    | W     |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder PE34215LF-18](#)



## SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE34215LF-18

#### Mechanical Specifications

##### Cable Assembly

|          |                   |
|----------|-------------------|
| Length*  | 18 in [457.2 mm]  |
| Diameter | 0.378 in [9.6 mm] |
| Weight   | 0.14 lbs [63.5 g] |

##### Cable

|                                      |                     |
|--------------------------------------|---------------------|
| Cable Type                           | PE-SR401AL-STRAIGHT |
| Impedance                            | 50 Ohms             |
| Inner Conductor Type                 | Solid               |
| Inner Conductor Material and Plating | Copper, Silver      |
| Dielectric Type                      | PTFE                |
| Number of Shields                    | 1                   |
| Shield Layer 1                       | Tinned Aluminum     |
| Jacket Diameter                      | 0.25 in [6.35 mm]   |
| One Time Minimum Bend Radius         | 0.25 in [6.35 mm]   |

#### Connectors

| Description                       | Connector 1          | Connector 2          |
|-----------------------------------|----------------------|----------------------|
| Type                              | SMA Male Right Angle | SMA Male Right Angle |
| Impedance                         | 50 Ohms              | 50 Ohms              |
| Contact Material and Plating      | Brass, Gold          | Brass, Gold          |
| Dielectric Type                   | Teflon               | Teflon               |
| Body Material and Plating         | Brass, Gold          | Brass, Gold          |
| Coupling Nut Material and Plating | Brass, Gold          | Brass, Gold          |
| Hex Size                          | 5/16 in              | 5/16 in              |
| Torque                            | 5 in-lbs [0.57 Nm]   | 5 in-lbs [0.57 Nm]   |

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

Cable assemblies that are 60 inches or less use straight coax, greater than 60 inches use coiled coax

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder PE34215LF-18](#)



## SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE34215LF-18

#### How to Order

Part Number Configuration:

**PE34215LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE34215LF-12 = 12 inches long cable  
PE34215LF-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder PE34215LF-18](https://www.pasternack.com/sma-male-sma-male-pe-sr401al-cable-assembly-pe34215lf-18-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-male-pe-sr401al-cable-assembly-pe34215lf-18-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE34215LF-18 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Cable 18 Inch  
Length Using PE-SR401AL Coax , LF Solder

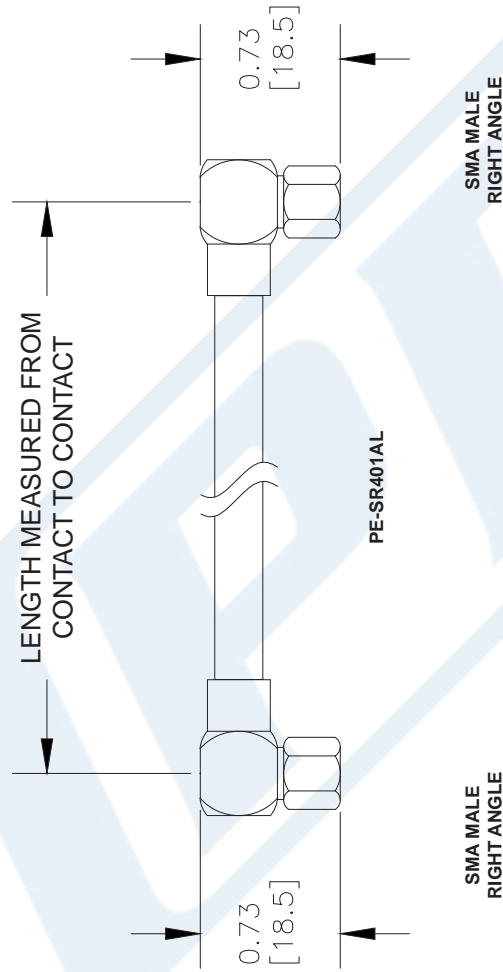

| How To Order                                                                                                                                                                                                                                                                                                                    |                                                                                                                     |     |               |        |               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----|---------------|--------|---------------|
| <div>Part Number Configuration</div> <div>PE3 <input type="text" value="zzz"/> <input type="text" value="yy"/> - <input type="text" value="xx"/> <input type="text" value="uu"/></div> <div>00 - 99999</div> <div>LF = RoHS Compliant</div> <div>&lt; Blank &gt; = Standard</div> <div>Note: LF applies only to RF cables</div> | <div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div> |     |               |        |               |
|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                     | -12 | 12"           | -25CM  | 25Cm          |
|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                     | -24 | 24"           | -50CM  | 50Cm          |
|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                     | -36 | 36"           | -75CM  | 75Cm          |
|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                     | -48 | 48"           | -100CM | 100Cm         |
|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                     | -60 | 60"           | -125CM | 125Cm         |
| Note: LF applies only to RF cables                                                                                                                                                                                                                                                                                              |                                                                                                                     | -xx | Custom Length | -xxCM  | Custom Length |

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE34215LF**

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 41613

SCALE N/A

SIZE A