



## SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE34247LF-18

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Female Bulkhead
- Cable Type: PE-SR401AL-STRAIGHT

#### Features

- Max Frequency 18 GHz
- 69.5% Phase Velocity

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE34247LF-18 SMA male to SMA female bulkhead 18 inch cable using PE-SR401AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm semi-rigid PE-SR401AL-STRAIGHT coax. The PE34247LF-18 SMA male to SMA female cable assembly operates to 18 GHz. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Velocity of Propagation		69.5		%
Capacitance		29.6 [97.11]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			7,500	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.4	1	5	10	18	GHz
Insertion Loss (Typ.)	4.5	7.5	22	33	48	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder PE34247LF-18](#)



## SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE34247LF-18

Power Handling (Max.)	962	661	265	174	100	W
-----------------------	-----	-----	-----	-----	-----	---

#### Mechanical Specifications

##### Cable Assembly

Length*	18 in [457.2 mm]
Diameter	0.438 in [11.13 mm]
Weight	0.126 lbs [57.15 g]

##### Cable

Cable Type	PE-SR401AL-STRAIGHT
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Aluminum
Jacket Diameter	0.25 in [6.35 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]

##### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female Bulkhead
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Material and Plating	Brass, Nickel	
Hex Size	5/16 in.	
Torque	5 in-lbs [0.57 Nm]	

##### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.  
Cable assemblies that are 60 inches or less use straight coax, greater than 60 inches use coiled coax

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder PE34247LF-18](#)



## SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE34247LF-18

#### How to Order

Part Number Configuration:

PE34247LF

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE34247LF-12 = 12 inches long cable  
PE34247LF-100cm = 100 cm long cable

SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Bulkhead Cable 18 Inch Length Using PE-SR401AL Coax , LF Solder PE34247LF-18](https://www.pasternack.com/sma-male-sma-female-pe-sr401al-cable-assembly-pe34247lf-18-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-female-pe-sr401al-cable-assembly-pe34247lf-18-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34247LF-18 CAD Drawing

SMA Male to SMA Female Bulkhead Cable 18 Inch Length  
Using PE-SR401AL Coax , LF Solder

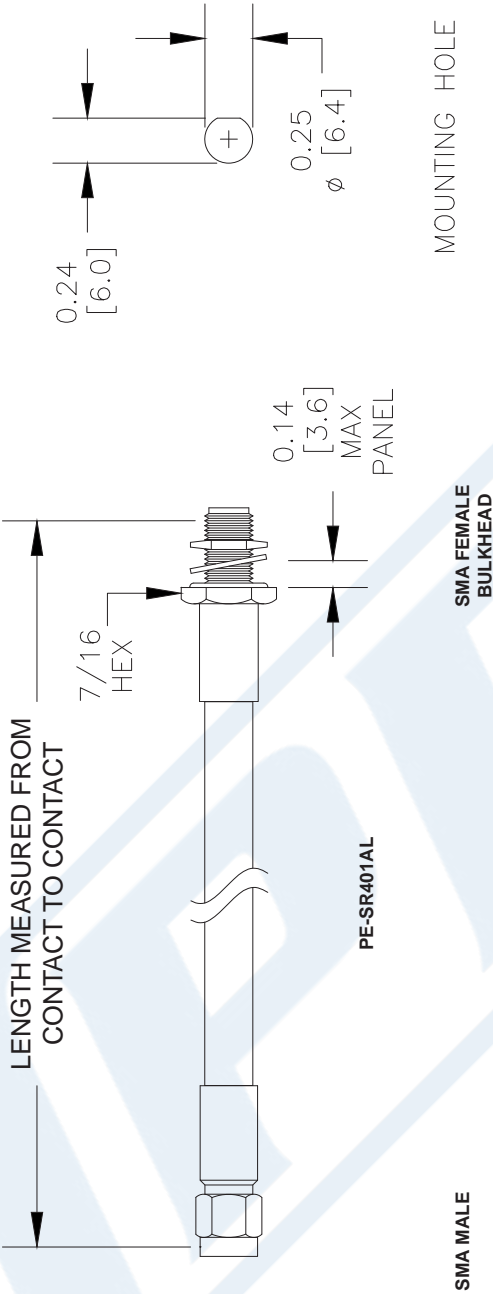

How To Order			Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<b>Part Number Configuration</b>		<b>Examples</b>	-12	12"	-25CM	25Cm
PE3	zzz	yy	-24	24"	-50CM	50Cm
		xx	-36	36"	-75CM	75Cm
		uu	-48	48"	-100CM	100Cm
00 - 99999	LF = RoHS Compliant < Blank > = Standard		-60	60"	-125CM	125Cm
Note: LF applies only to RF cables		Length	-xx	Custom Length	-xxCM	Custom Length

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE  
**PE34247LF**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

FSCM NO. 53919	CAD FILE 41613	SCALE N/A	SIZE A
----------------	----------------	-----------	--------