



2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz,
 Low Noise Amplifier, 28 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1026

PE15A1026 is a X-band coaxial low noise amplifier operating in the 8 to 12 GHz frequency range. The amplifier offers 2.2 dB typical noise figure, 13 dBm minimum of saturated power and high 28 dB minimal small signal gain. This exceptional technical performance is achieved through the use of hybrid MIC design and advanced GaAs PHEMT devices. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, and reverse bias protection for added reliability. The amplifier operates over the temperature range of -40°C and +85°C.

Features

- 8 GHz to 12 GHz Frequency Range
- Psat: 13 dBm min
- High Small Signal Gain: 28 dB min
- Noise Figure: 2.2 dB typ
- 50 Ohm Input and Output Matched
- -40 to 85°C Operating Temperature
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Overvoltage External Protection for Easy Repair

Applications

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Military & Space
- Communication Systems
- Microwave Radio Systems
- Satellite Communications
- Low Noise Amplifier
- General Purpose Amplification
- Gain Block

Electrical Specifications (TA = +25°C, DC Voltage = 12Vdc, DC Current = 200mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	8		12	GHz
Small Signal Gain	28			dB
Gain Flatness			±1	dB
Output at 1 dB Compression Point	+13			dBm
Saturated Output Power (Psat)	+13			dBm
Noise Figure		2.2		dB
Input VSWR			2:1	
Output VSWR			2:1	
Operating DC Voltage	11	12	13	Volts
Operating DC Current			200	mA
Operating Temperature Range	-40		+85	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA PE15A1026](#)



2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz,
Low Noise Amplifier, 28 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1026

Absolute Maximum Rating

Parameter	Rating	Units
Source Voltage	+13	Volts
RF input Power	+17	dBm
Operating Temperature (base-plate)	-40 to +85	°C
Storage Temperature	-55 to +85	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Mechanical Specifications

Size

Length	1.333 in [33.86 mm]
Width	1.093 in [27.76 mm]
Height	0.382 in [9.7 mm]
Weight	0.0907 lbs [41.14 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Shock
Vibration

RTCA, DO-160C
RTCA, DO-160C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA PE15A1026](#)





2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz,
Low Noise Amplifier, 28 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1026

Typical Performance Data

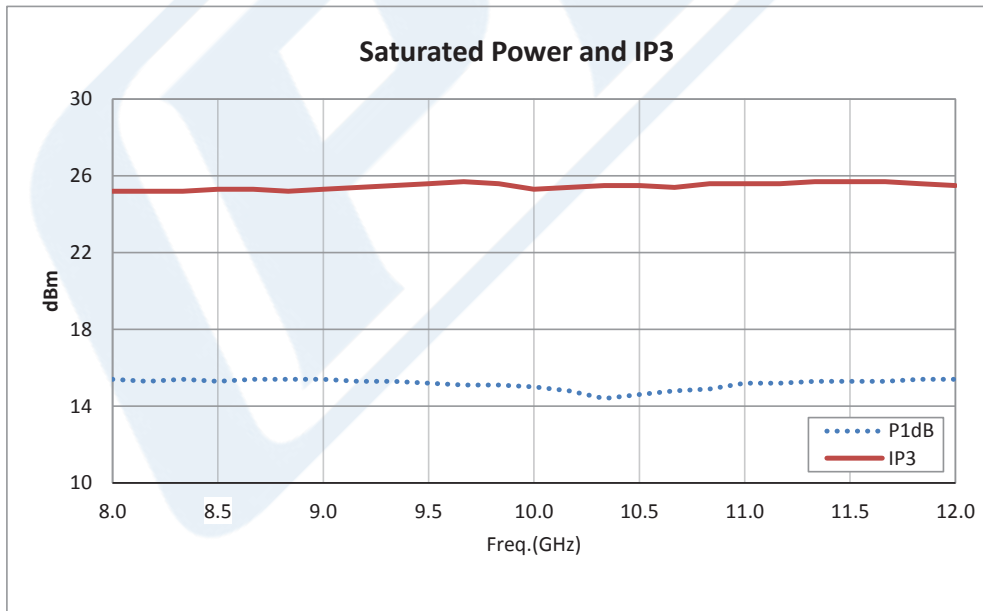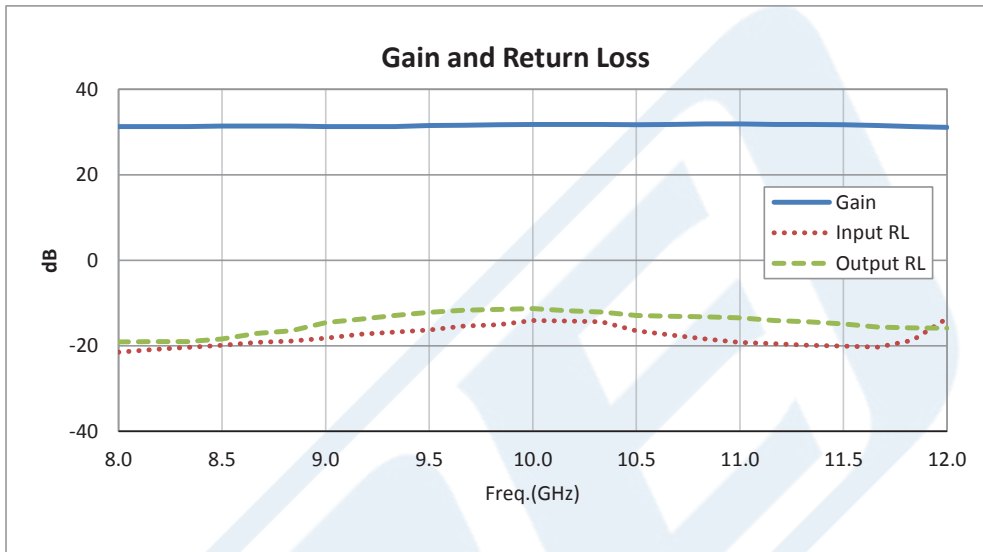



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA PE15A1026](#)



2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz,
Low Noise Amplifier, 28 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1026

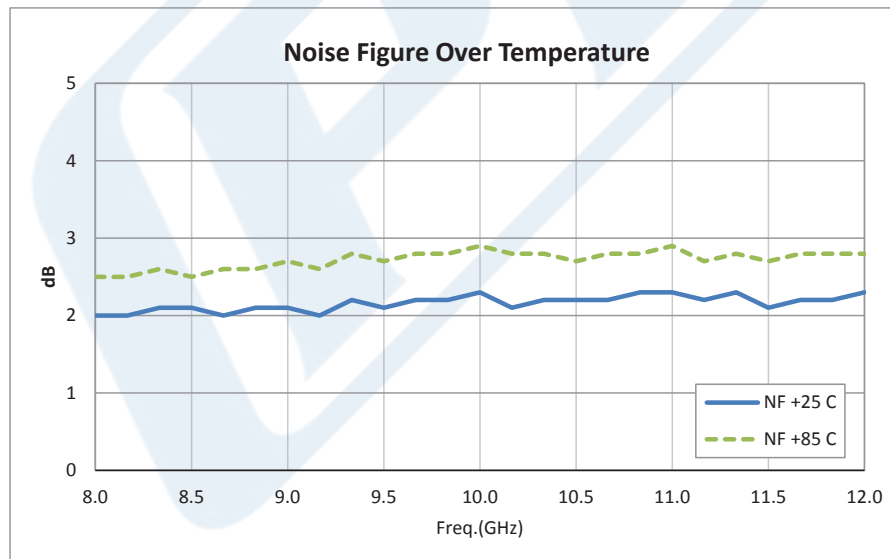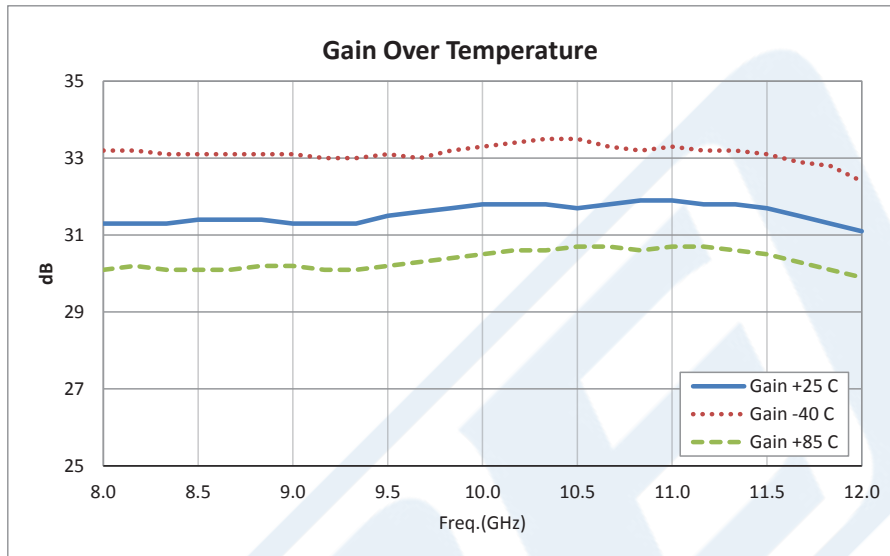

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA PE15A1026](#)



2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz,
Low Noise Amplifier, 28 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A1026

2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA PE15A1026](https://www.pasternack.com/2.2-db-12-ghz-low-noise-amplifier-28-db-gain-sma-pe15a1026-p.aspx)

URL: <https://www.pasternack.com/2.2-db-12-ghz-low-noise-amplifier-28-db-gain-sma-pe15a1026-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A1026 CAD Drawing

2.2 dB NF, 13 dBm Psat, 8 GHz to 12 GHz, Low Noise Amplifier, 28 dB Gain, SMA

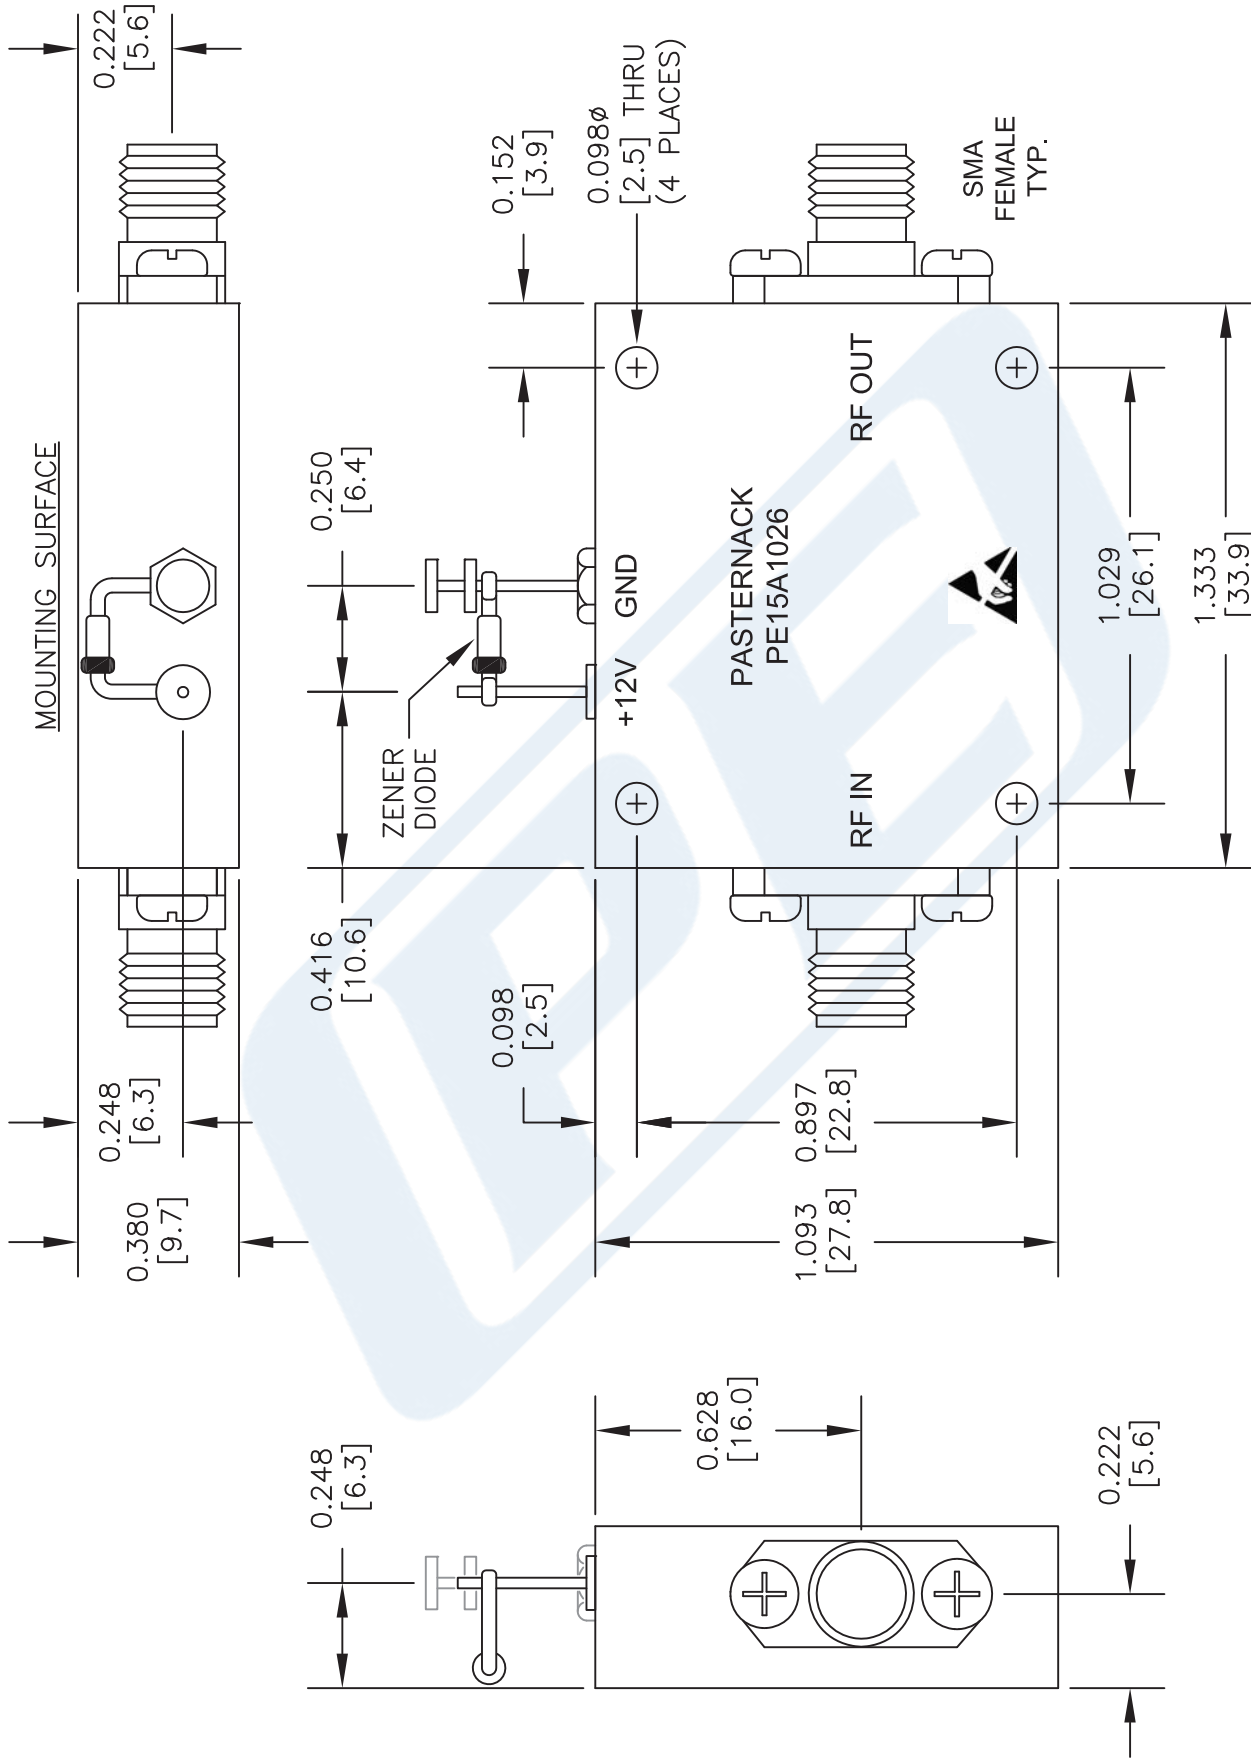

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE15A1026

FSCM NO. 53919

CAD FILE 061215

SCALE N/A

SIZE A

2233

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com