



1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3019

The PE15A3019 is a 30 dBm power amplifier designed for operation in the 6 GHz to 18 GHz frequency range. The amplifier provides 30 dB of Gain Min over the operating frequency range. High efficiency operation is achieved by using hybrid MIC designs and advanced GaAs PHEMT devices. The amplifier requires only +16 VDC power supply.

Features

- 6 GHz to 18 GHz Frequency Range
- P1dB +30 dBm min.
- Gain 30 dB min.
- Gain Flatness +/-1.5 dB typ

Applications

- Medium Power Amplifier
- Driver Amp
- Military Communications
- Broadband Communication
- Test & Measurement

Electrical Specifications (TA= 25°C)

Description	Minimum	Typical	Maximum	Units
Frequency Range	6		18	GHz
Gain	30			dB
Gain Flatness		±1.5		dB
Output at 1 dB Compression Point	+30			dBm
Input VSWR		1.8:1	2:1	
Output VSWR		1.8:1	2:1	
Operating DC Voltage 1	16		18	Volts
Operating DC Current		1,700		mA
Quiescent Current		2,500		mA
Operating Temperature Range (OTR)	-40		+70	°C

Mechanical Specifications

Size	
Length	2.65 in [67.31 mm]
Width	2.5 in [63.5 mm]
Height	0.45 in [11.43 mm]
Weight	0.29 lbs [131.54 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-40 to +70 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA PE15A3019](#)



1 Watt P1dB, 6 GHz to 18 GHz, Medium Power
Broadband Amplifier, 30 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3019

Shock
Vibration
Temperature Cycling

RTCA, DO-160C
RTCA, DO-160C
MIL-STD-883, METHOD 1010

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA PE15A3019](#)



1 Watt P1dB, 6 GHz to 18 GHz, Medium Power
Broadband Amplifier, 30 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3019

Typical Performance Data

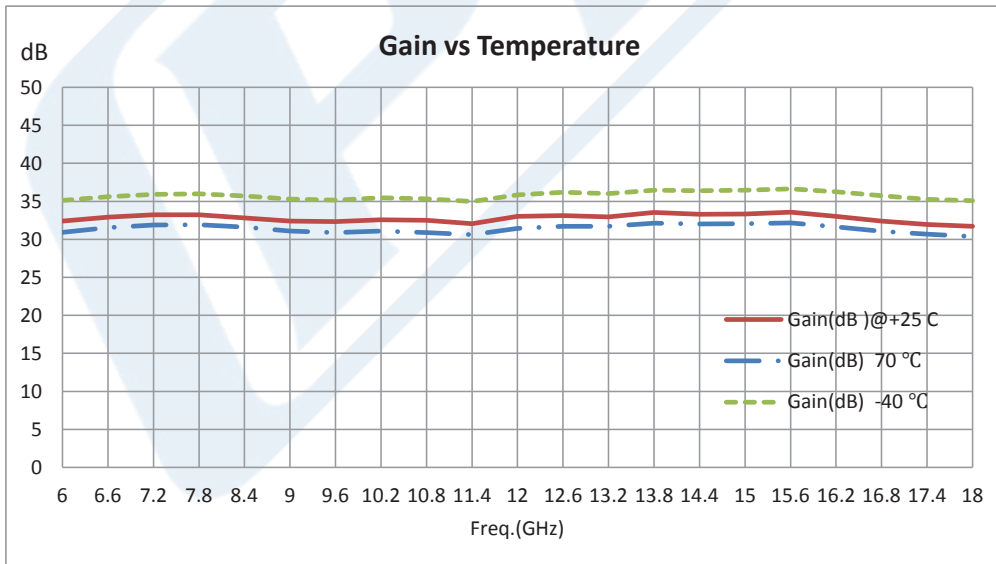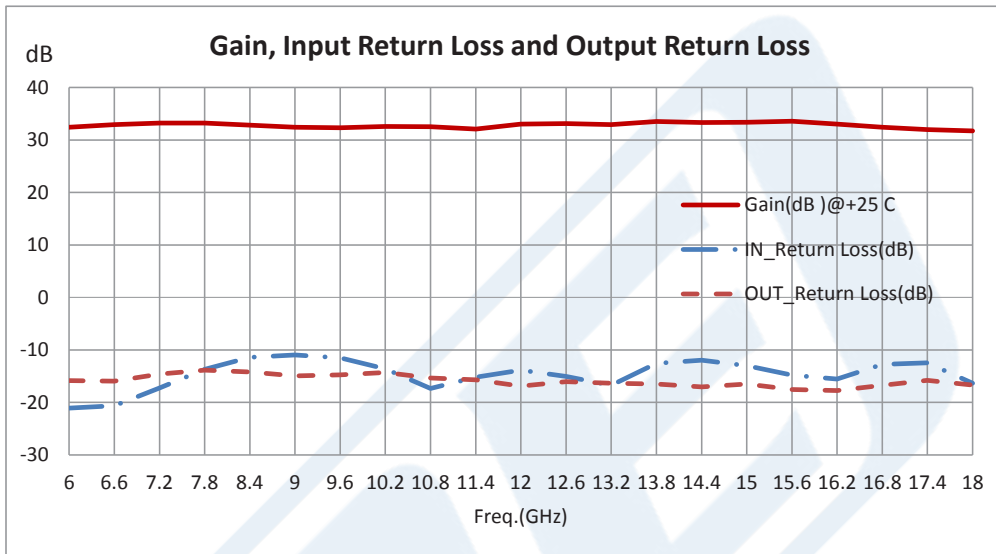


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA PE15A3019](#)



1 Watt P1dB, 6 GHz to 18 GHz, Medium Power
Broadband Amplifier, 30 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3019

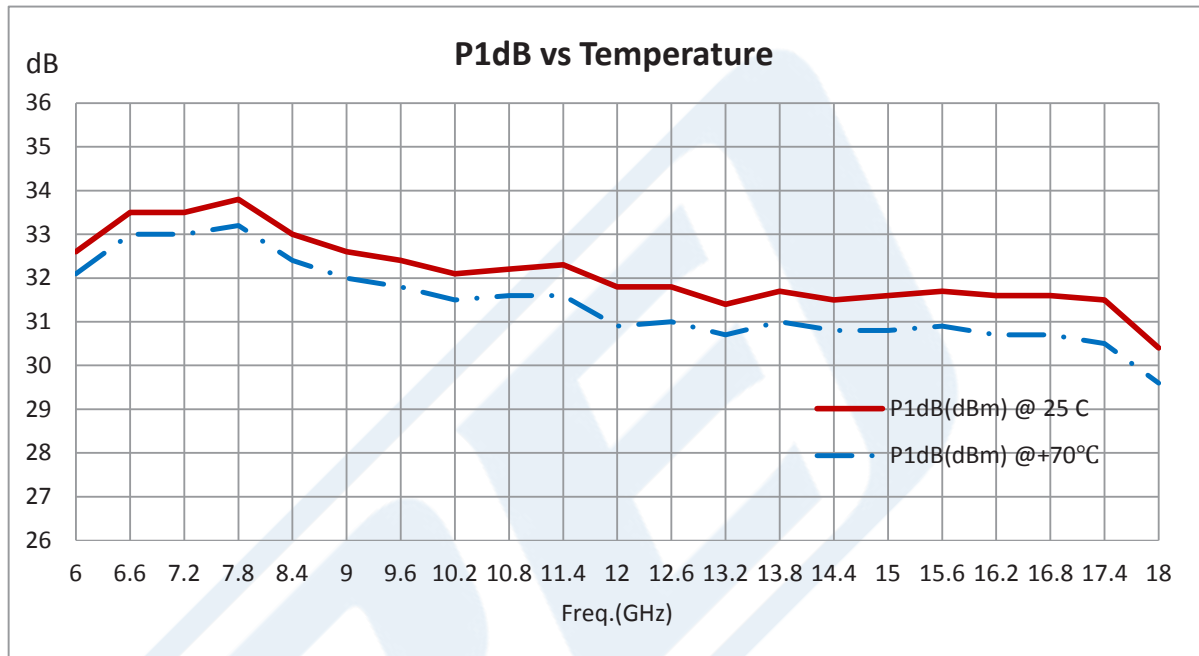

1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA PE15A3019](https://www.pasternack.com/18-ghz-medium-power-broadband-amplifier-30-db-gain-sma-pe15a3019-p.aspx)

URL: <https://www.pasternack.com/18-ghz-medium-power-broadband-amplifier-30-db-gain-sma-pe15a3019-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A3019 CAD Drawing

1 Watt P1dB, 6 GHz to 18 GHz, Medium Power Broadband Amplifier, 30 dB Gain, SMA

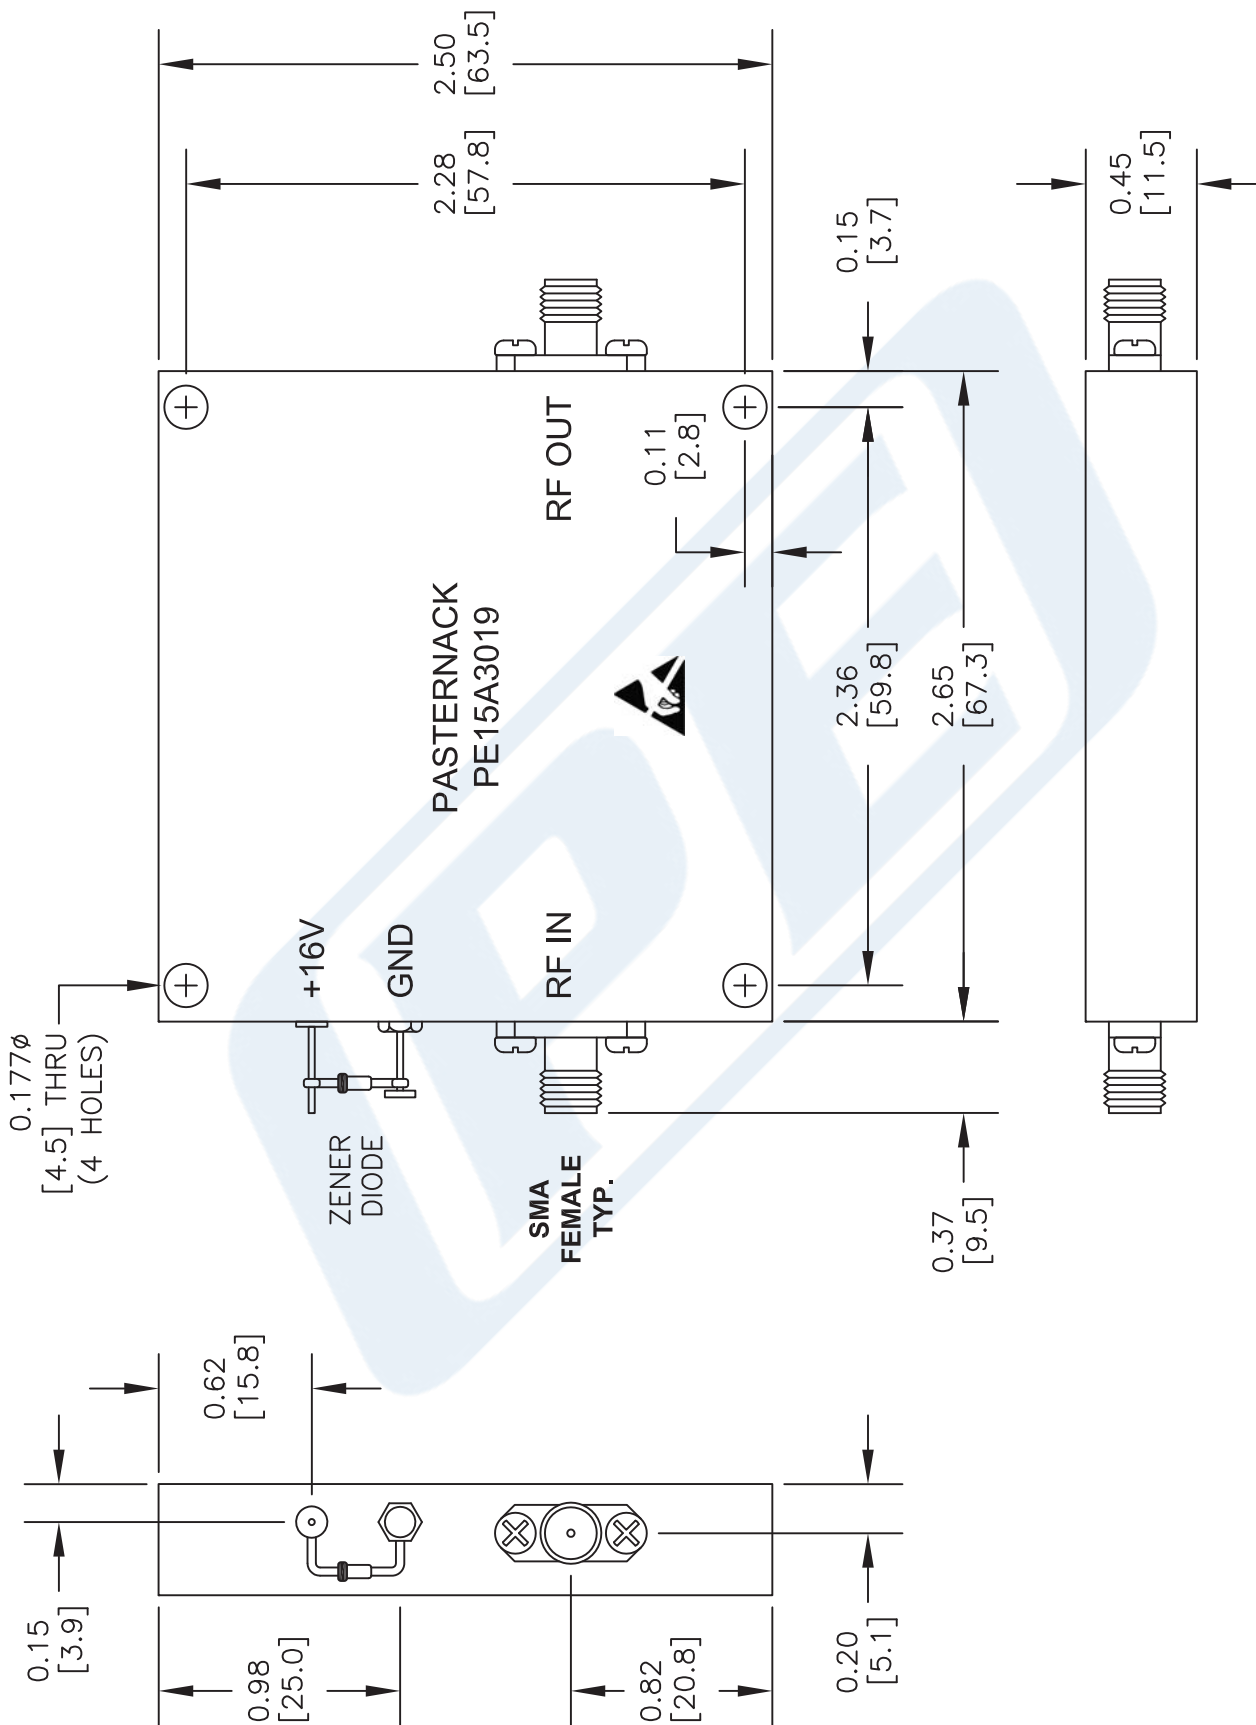

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE15A3019

FSCM NO. 53919

CAD FILE 120414

SCALE N/A

SIZE A

2233

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com