



## BNC Male to BNC Male Cable 48 Inch Length Using RG174 Coax

## RF Cable Assemblies Technical Data Sheet

PE3C2295-48

**Configuration**

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: RG174

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.1 [102.03]		pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.368	0.536	0.748	1.047	1.48	dB

**Mechanical Specifications****Cable Assembly**

Length*	48 in [121.92 cm]
Diameter	0.57 in [14.48 mm]
Weight	0.084 lbs [38.1 g]

**Cable**

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PE (LD)
Number of Shields	1
Shield Layer 1	Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 48 Inch Length Using RG174 Coax PE3C2295-48](#)





## BNC Male to BNC Male Cable 48 Inch Length Using RG174 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C2295-48

#### How to Order

Part Number Configuration:

**PE3C2295**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C2295-12 = 12 inches long cable  
PE3C2295-100cm = 100 cm long cable

BNC Male to BNC Male Cable 48 Inch Length Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 48 Inch Length Using RG174 Coax PE3C2295-48](https://www.pasternack.com/bnc-male-bnc-male-rg174au-cable-assembly-pe3c2295-48-p.aspx)

URL: <https://www.pasternack.com/bnc-male-bnc-male-rg174au-cable-assembly-pe3c2295-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2295-48 CAD Drawing

BNC Male to BNC Male Cable 48 Inch Length Using RG174 Coax

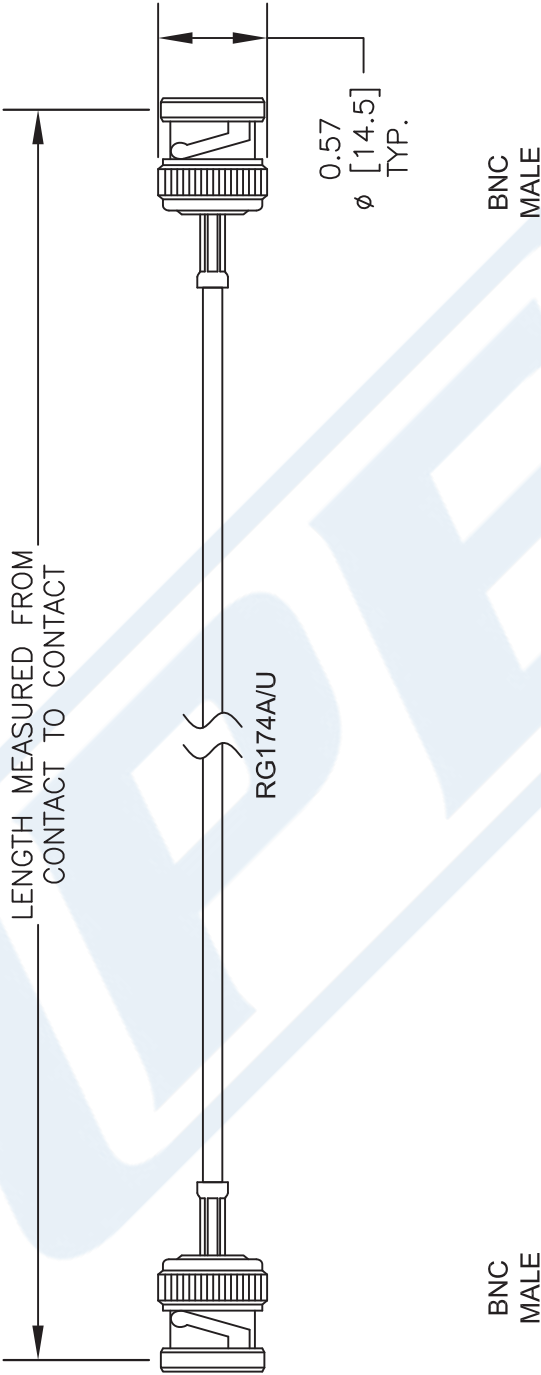

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - 3. DIMENSIONS ARE IN INCHES [mm].
  - 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE		FSCM NO. 53919		CAD FILE 072916		SCALE N/A		SIZE A		2233	
PE3C2295											



PASTERNAK®

THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)