



SMA Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3321LF

Configuration

- Connector 1: SMA Male
- Connector 2: BNC Male
- Cable Type: RG179

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range | DC | | 400 | MHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 70 | | % |
| Capacitance | | 19.4 [63.65] | | pF/ft [pF/m] |
| Operating Voltage (AC) | | | 335 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|--------|--------|--------|--------|-------|
| Frequency | 50 | 100 | 250 | 500 | 1,000 | MHz |
| Insertion Loss (Max.) | 1.04 | 1.09 | 1.14 | | | dB/ft |
| | 3.41 | 3.58 | 3.74 | | | dB/m |
| VSWR (Max.) | 1.4:1 | 1.4:1 | 1.4:1 | 1.4:1 | 1.4:1 | dB/m |
| Return Loss (Max.) | 15.56 | 15.563 | 15.563 | 15.563 | 15.563 | dB |

Mechanical Specifications

Cable Assembly

Diameter 0.57 in [14.48 mm]

Cable

Cable Type RG179
Impedance 75 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS PE3C3321LF](#)



SMA Male to BNC Male Cable Using 75 Ohm
RG179 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3321LF

| | |
|------------------------------|----------------------------|
| Number of Shields | 1 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Jacket Material | FEP, Tan |
| Jacket Diameter | 0.1 in [2.54 mm] |
| Repeated Minimum Bend Radius | 0.394 in [10.01 mm] |

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|--------------------|------------------|
| Type | SMA Male | BNC Male |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 30 µin minimum | 50µ in. minimum |
| Dielectric Type | PTFE | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100 µin minimum | 100µ in. minimum |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Nickel |
| Coupling Nut Plating Specification | 100 µin minimum | 100µ in. minimum |
| Hex Size | 5/16 inch | |
| Torque | 3 in-lbs [0.34 Nm] | |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS PE3C3321LF](#)



SMA Male to BNC Male Cable Using 75 Ohm
RG179 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3321LF

How to Order

Part Number Configuration:

PE3C3321LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3321LF-12 = 12 inches long cable
PE3C3321LF-100cm = 100 cm long cable

SMA Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS PE3C3321LF](#)

URL: <https://www.pasternack.com/sma-male-bnc-male-rg179bu-cable-assembly-pe3c3321lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3321LF CAD Drawing

SMA Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS

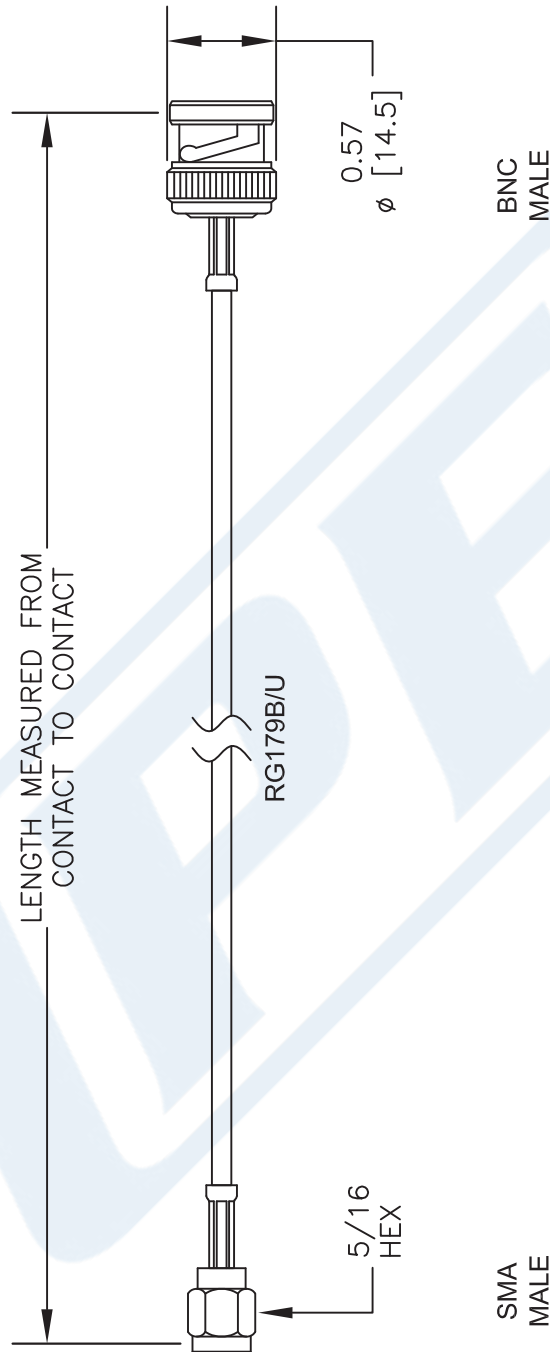

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE

PE3C3321LF

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 101916

SCALE N/A

SIZE A

2233