



## BNC Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS

### RF Cable Assemblies Technical Data Sheet

**PE3C3349LF**

#### Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: RG179

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		400	MHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		19.4 [63.65]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Max.)	0.08	0.09	0.14	0.2	0.3	dB/ft
	0.26	0.3	0.46	0.66	0.98	dB/m
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB/m dB

#### Mechanical Specifications

##### Cable Assembly

Diameter

0.57 in [14.48 mm]

##### Cable

Cable Type

RG179

Impedance

75 Ohms

Inner Conductor Type

Stranded

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS PE3C3349LF](#)



BNC Male to BNC Male Cable Using 75 Ohm  
RG179 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3349LF

Jacket Material	FEP, Tan
Jacket Diameter	0.1 in [2.54 mm]
Repeated Minimum Bend Radius	0.394 in [10.01 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100 µin minimum

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS PE3C3349LF](#)



BNC Male to BNC Male Cable Using 75 Ohm  
RG179 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3349LF

**How to Order**

Part Number Configuration:

**PE3C3349LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3349LF-12 = 12 inches long cable  
PE3C3349LF-100cm = 100 cm long cable

BNC Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS PE3C3349LF](#)

URL: <https://www.pasternack.com/bnc-male-bnc-male-rg179bu-cable-assembly-pe3c3349lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C3349LF CAD Drawing

BNC Male to BNC Male Cable Using 75 Ohm RG179 Coax, LF Solder, RoHS

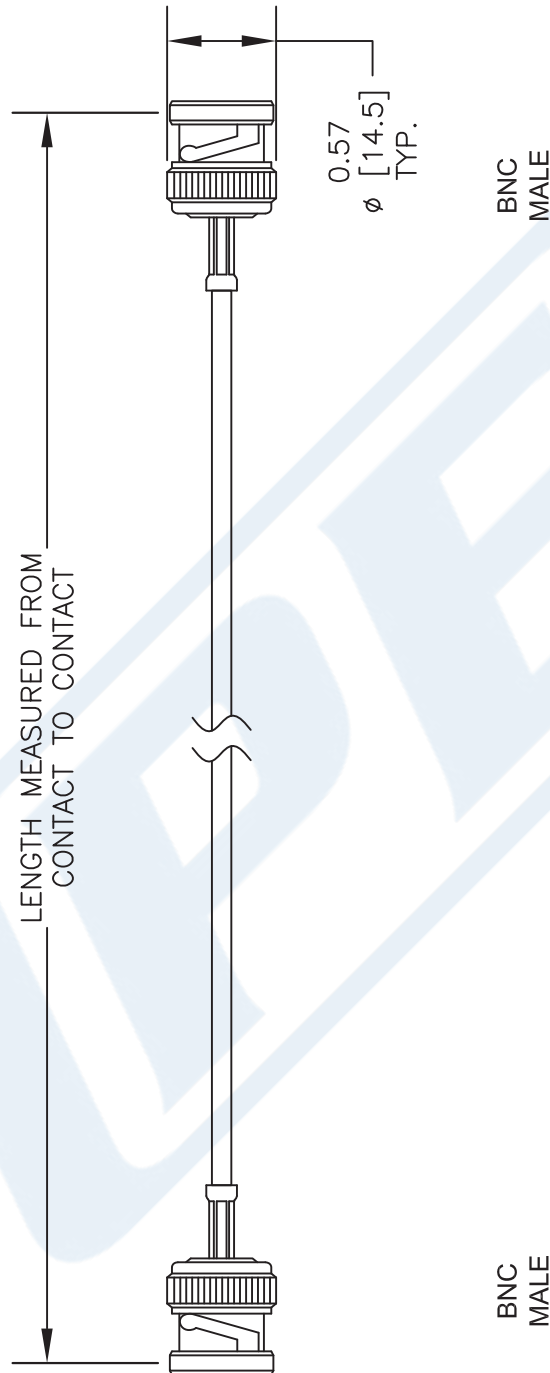

## NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

## DWG TITLE

PE3C3349LF

FSCM NO. 53919

CAD FILE 080316

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)