



# SMA Male Right Angle to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS

## RF Cable Assemblies Technical Data Sheet

PE3C3437LF-60

### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: BNC Male
- Cable Type: RG188

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.45	0.83				dB
Insertion Loss (Typ.)	0.45	0.825				dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

### Mechanical Specifications

#### Cable Assembly

Length*	60 in [152.4 cm]
Diameter	0.57 in [14.48 mm]

#### Cable

Cable Type	RG188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3437LF-60](#)



SMA Male Right Angle to BNC Male Cable 60 Inch  
Length Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3437LF-60

Jacket Material  
Jacket Diameter

PTFE, White  
0.11 in [2.79 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 µin minimum	50µ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100µ in. minimum
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3437LF-60](#)



## SMA Male Right Angle to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS

### RF Cable Assemblies Technical Data Sheet

PE3C3437LF-60

#### How to Order

Part Number Configuration:

**PE3C3437LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3437LF-12 = 12 inches long cable  
PE3C3437LF-100cm = 100 cm long cable

SMA Male Right Angle to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable 60 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C3437LF-60](https://www.pasternack.com/sma-male-bnc-male-rg188au-cable-assembly-pe3c3437lf-60-p.aspx)

URL: <https://www.pasternack.com/sma-male-bnc-male-rg188au-cable-assembly-pe3c3437lf-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C3437LF-60 CAD Drawing

SMA Male Right Angle to BNC Male Cable 60 Inch Length  
Using RG188 Coax, LF Solder, RoHS

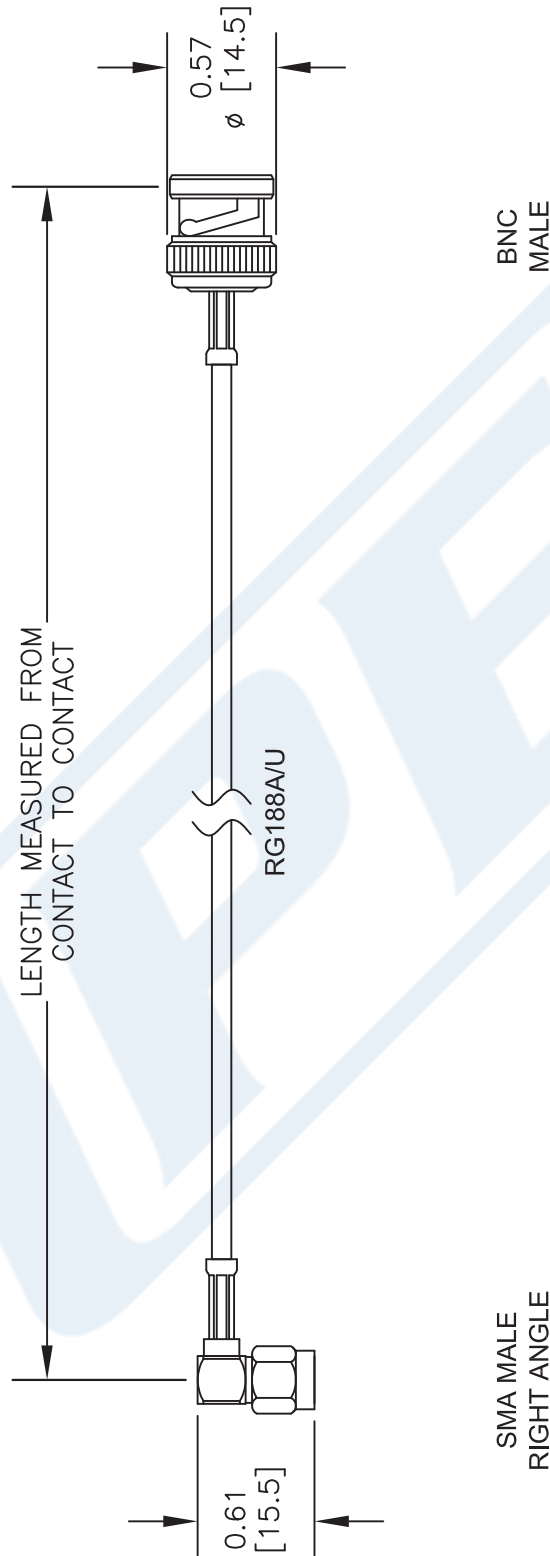

DWG TITLE

**PE3C3437LF**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

CAGE CODE 53919

CAD FILE 112116

SCALE N/A

SIZE A

2233