



0.5 inch Commercial Surface Mount (SMT) Voltage
Controlled Oscillator (VCO) From 1.5 GHz to
2.5 GHz With Phase Noise of -84 dBc/Hz

Voltage Control Oscillators Technical Data Sheet

PE1V11021

Features

- 1500 to 2500 MHz Bandwidth
- -84 dBc/Hz @ 10kHz offset
- Tuning Voltage 0.0V to 16v
- Pout = +10.0 dBm
- Harmonics = -12 dBc
- RoHs Compliant Assembly
- 0.5" SMT package
- Industry Standard Mounting Footprint
- Designed to meet MIL-STD-202 Environmental Conditions

Applications

- Phase Locked Loop
- Function Generators
- Frequency Synthesizers
- Receivers
- Electronic Jamming Equipment
- Local Oscillator
- Wireless Communications
- SATCOM
- Optical Communications
- Military Electronic Systems

Description

The PE1V11021 is a High Reliability Low Noise Voltage Controlled Oscillator (VCO) which covers a 1500 MHz to 2500 MHz frequency band with a voltage tuning range from 0.0V to 16V. This design features exceptional phase noise performance of -84 dBc/Hz @ 10 kHz offset. Supply Voltage is +15V with a generated output power level of +10.0 dBm and 2nd harmonic output of -12 dBc typical. The assembly is RoHs compliant and available in a compact 0.5 inch SMT package with an industry standard mounting footprint. The bottom surface is copper clad with 2-5 micro inches of immersion Gold over 150 - 250 micro inches of Electro less Nickel which makes it resistant to oxidation for ease of soldering. The VCO operates over a temperature range of -40°C to +85°C and is designed to meet a variety of MIL-STD-202 test conditions including Humidity, Shock, and Vibration.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|----------------------------|---------|---------|---------|--------|
| Frequency Range | 1.5 | | 2.5 | GHz |
| Tuning Voltage | 0 | | 16 | Vdc |
| Supply Voltage (DC) | | 15 | | Vdc |
| Supply Current (DC) | | | 22 | mA |
| Phase Noise @ 10kHz Offset | | | -84 | dBc/Hz |
| Output Power | +10 | | | dBm |
| 2nd Harmonics | | | -12 | dBc |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 inch Commercial Surface Mount \(SMT\) Voltage Controlled Oscillator \(VCO\) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz PE1V11021](#)



0.5 inch Commercial Surface Mount (SMT) Voltage
Controlled Oscillator (VCO) From 1.5 GHz to
2.5 GHz With Phase Noise of -84 dBc/Hz

Voltage Control Oscillators Technical Data Sheet

PE1V11021

Mechanical Specifications

Size

| | |
|---------------------------------------|---------------------------|
| Length | 0.5 in [12.7 mm] |
| Width | 0.5 in [12.7 mm] |
| Height | 0.13 in [3.3 mm] |
| Weight | 0.01 lbs [4.54 g] |
| Mounting Surface Material and Plating | Copper Clad, Nickel, Gold |
| Design | Commercial |
| Package Style | Surface Mount |

Environmental Specifications

Temperature

| | |
|-----------------|-------------------|
| Operating Range | -40 to +85 deg C |
| Storage Range | -55 to +125 deg C |

Humidity

MIL-STD-202, Method 103, 90% RH, +65 C

Shock

MIL-STD-202, Method 213I

Vibration

MIL-STD-202, Method 204D

Temperature Cycle

MIL-STD-202, Method 107B

ESD Sensitivity

ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 inch Commercial Surface Mount \(SMT\) Voltage Controlled Oscillator \(VCO\) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz PE1V11021](#)





0.5 inch Commercial Surface Mount (SMT) Voltage
Controlled Oscillator (VCO) From 1.5 GHz to
2.5 GHz With Phase Noise of -84 dBc/Hz

Voltage Control Oscillators Technical Data Sheet

PE1V11021

Typical Performance Data

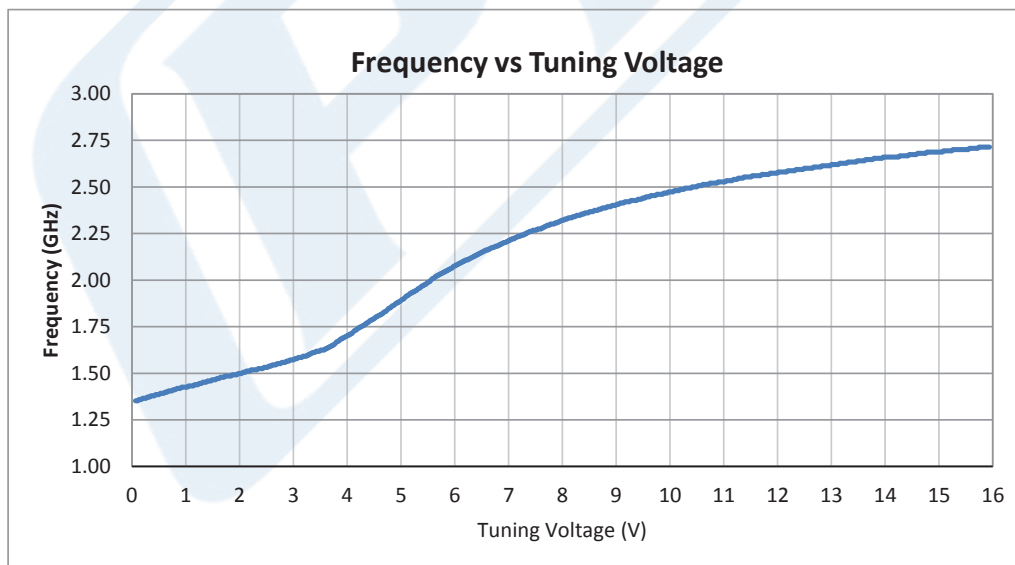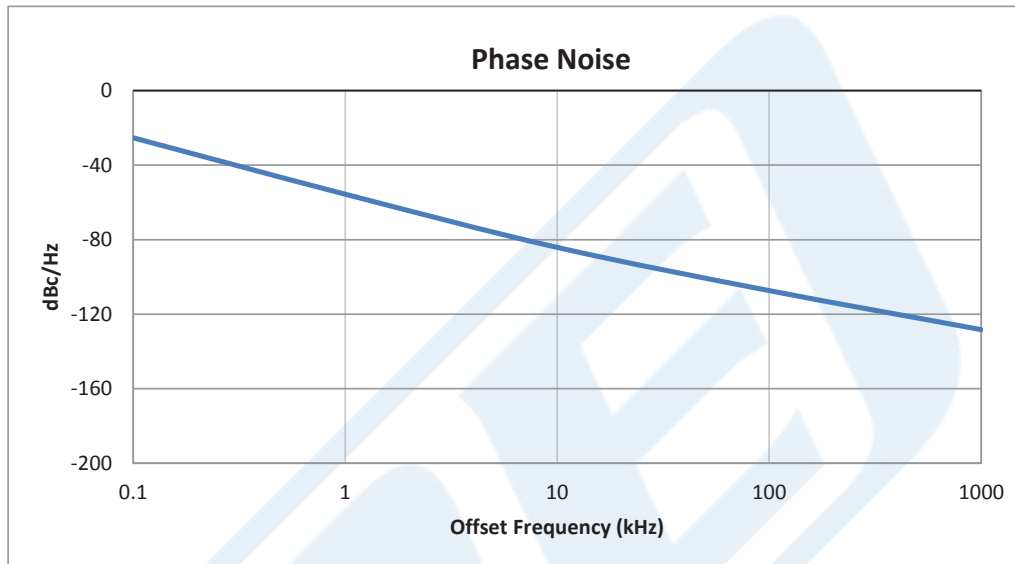



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 inch Commercial Surface Mount \(SMT\) Voltage Controlled Oscillator \(VCO\) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz PE1V11021](#)



0.5 inch Commercial Surface Mount (SMT) Voltage
Controlled Oscillator (VCO) From 1.5 GHz to
2.5 GHz With Phase Noise of -84 dBc/Hz

Voltage Control Oscillators Technical Data Sheet

PE1V11021

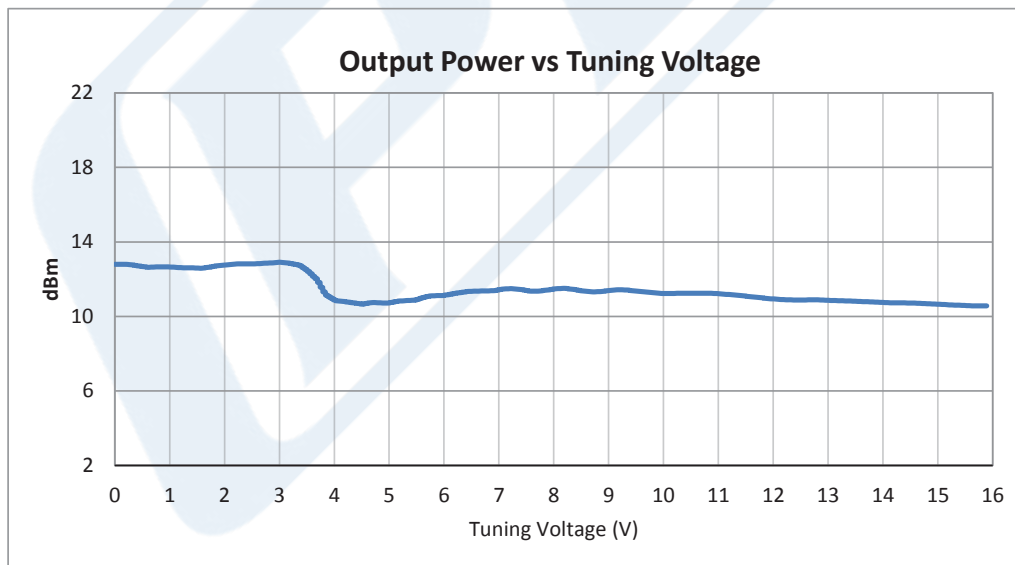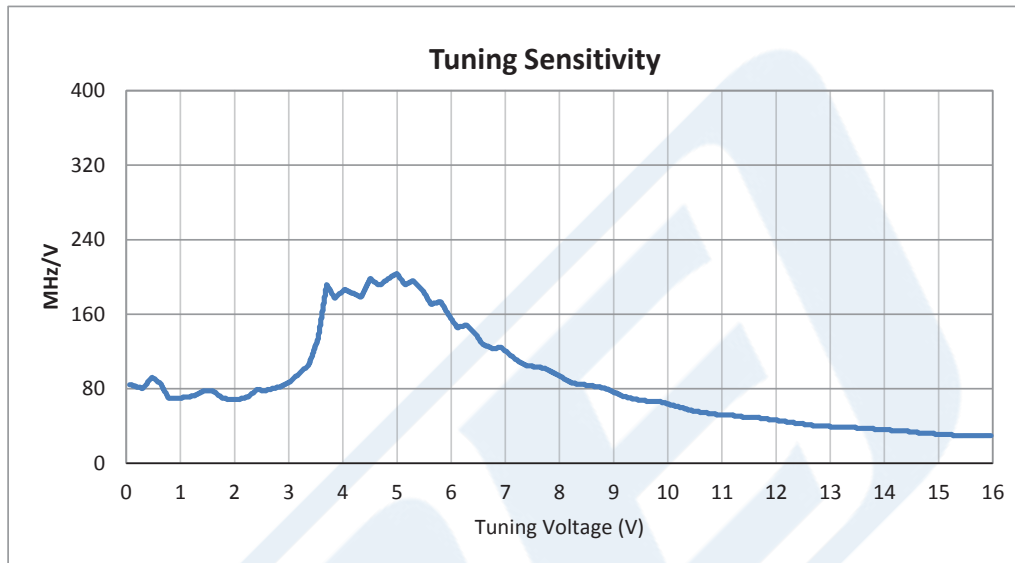


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 inch Commercial Surface Mount \(SMT\) Voltage Controlled Oscillator \(VCO\) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz PE1V11021](#)



0.5 inch Commercial Surface Mount (SMT) Voltage
Controlled Oscillator (VCO) From 1.5 GHz to
2.5 GHz With Phase Noise of -84 dBc/Hz

Voltage Control Oscillators Technical Data Sheet

PE1V11021

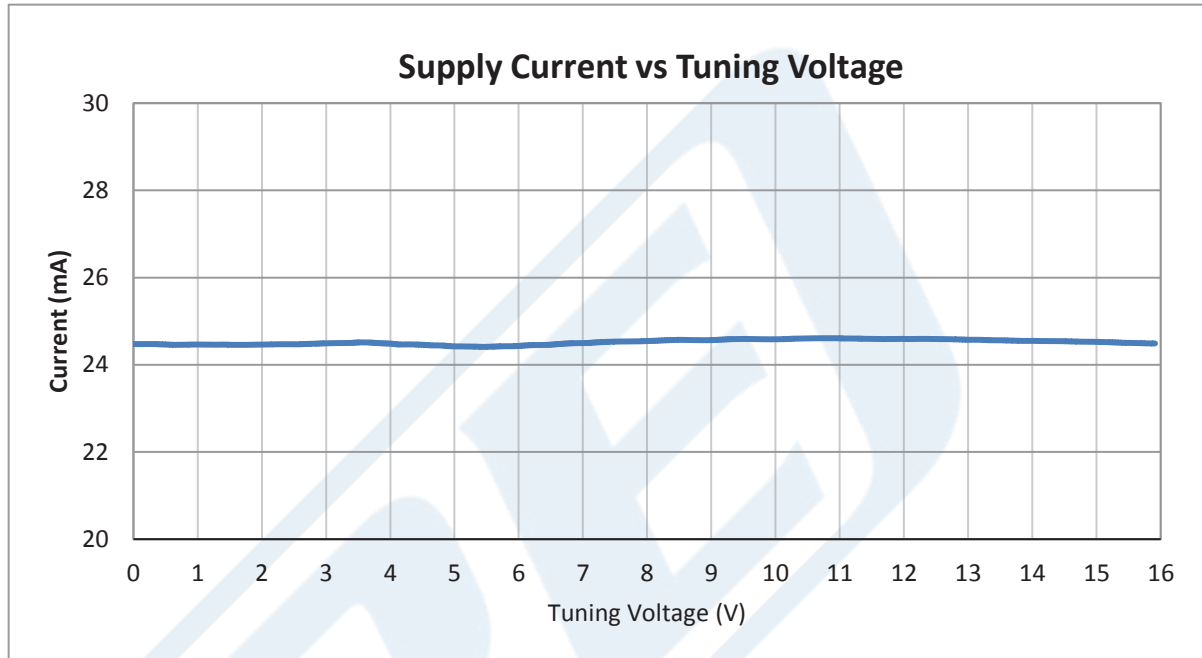

0.5 inch Commercial Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 inch Commercial Surface Mount \(SMT\) Voltage Controlled Oscillator \(VCO\) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz PE1V11021](http://www.pasternack.com/surface-mount-smt-voltage-controlled-oscillator-vco-2.5-ghz-pe1v11021-p.aspx)

URL: <http://www.pasternack.com/surface-mount-smt-voltage-controlled-oscillator-vco-2.5-ghz-pe1v11021-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE1V11021 CAD Drawing

0.5 inch Commercial Surface Mount (SMT) Voltage Controlled Oscillator
(VCO) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz

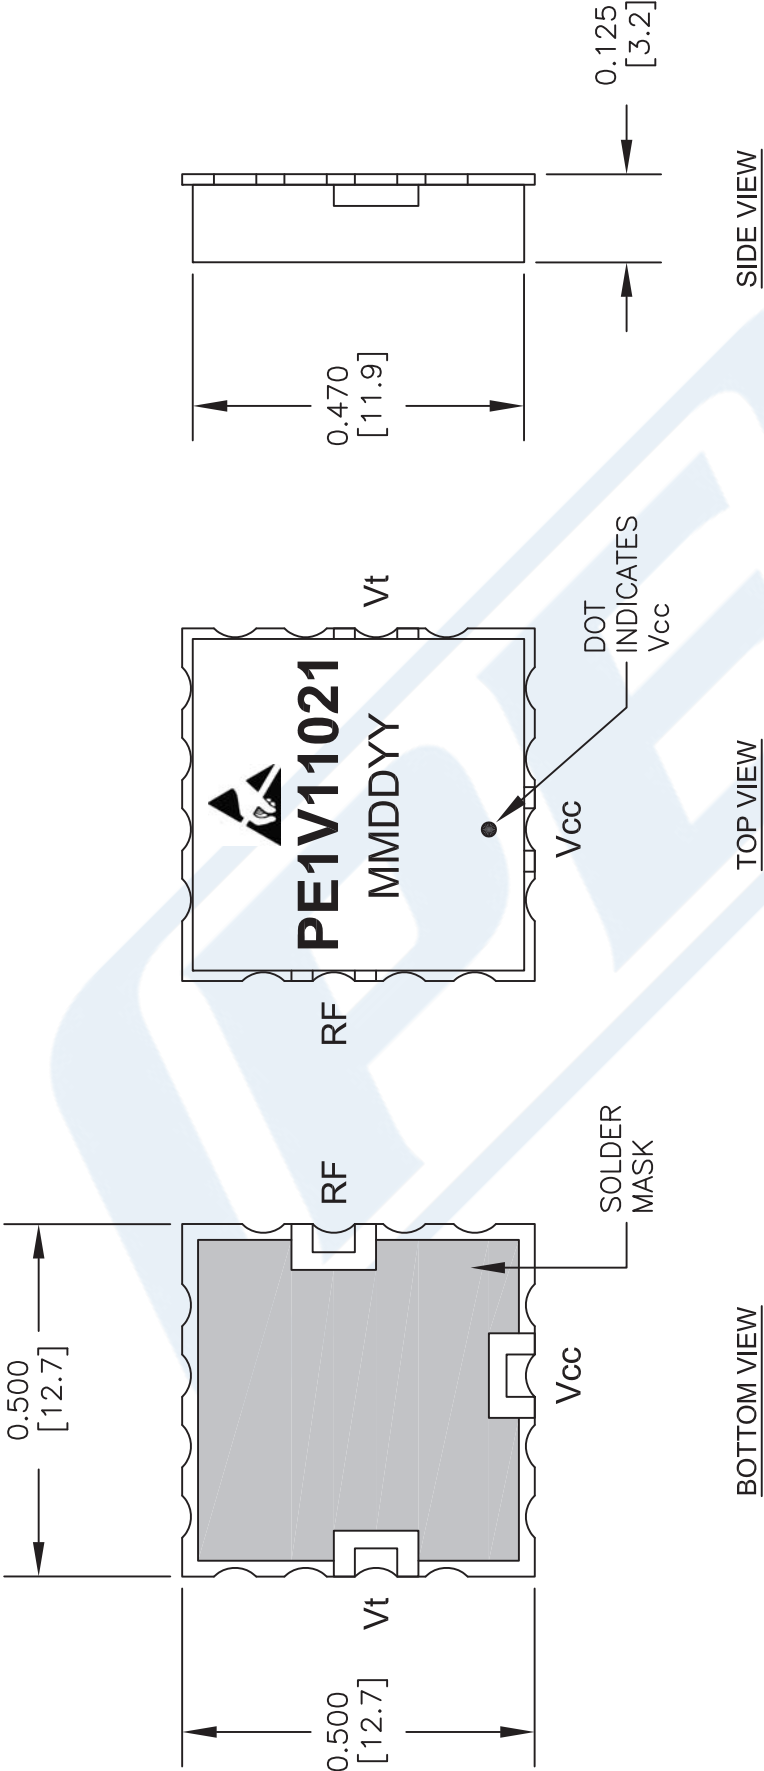

- NOTES:
1. THE CASE IS GROUND.
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [mm].
 3. UNLESS OTHERWISE SPECIFIED FINISH IS 150-250 MICRO INCHES ELECTROLESS NICKEL OVER COPPER CLAD PCB, 2-5 MICRO INCHES IMMERSION GOLD, OVER NICKEL.
 4. MOD PORT NOT AVAILABLE ON ALL MODELS.

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE1V11021

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE

021216


SCALE N/A

SIZE A

2233

PE1V11021 CAD Drawing

0.5 inch Commercial Surface Mount (SMT) Voltage Controlled Oscillator
(VCO) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz

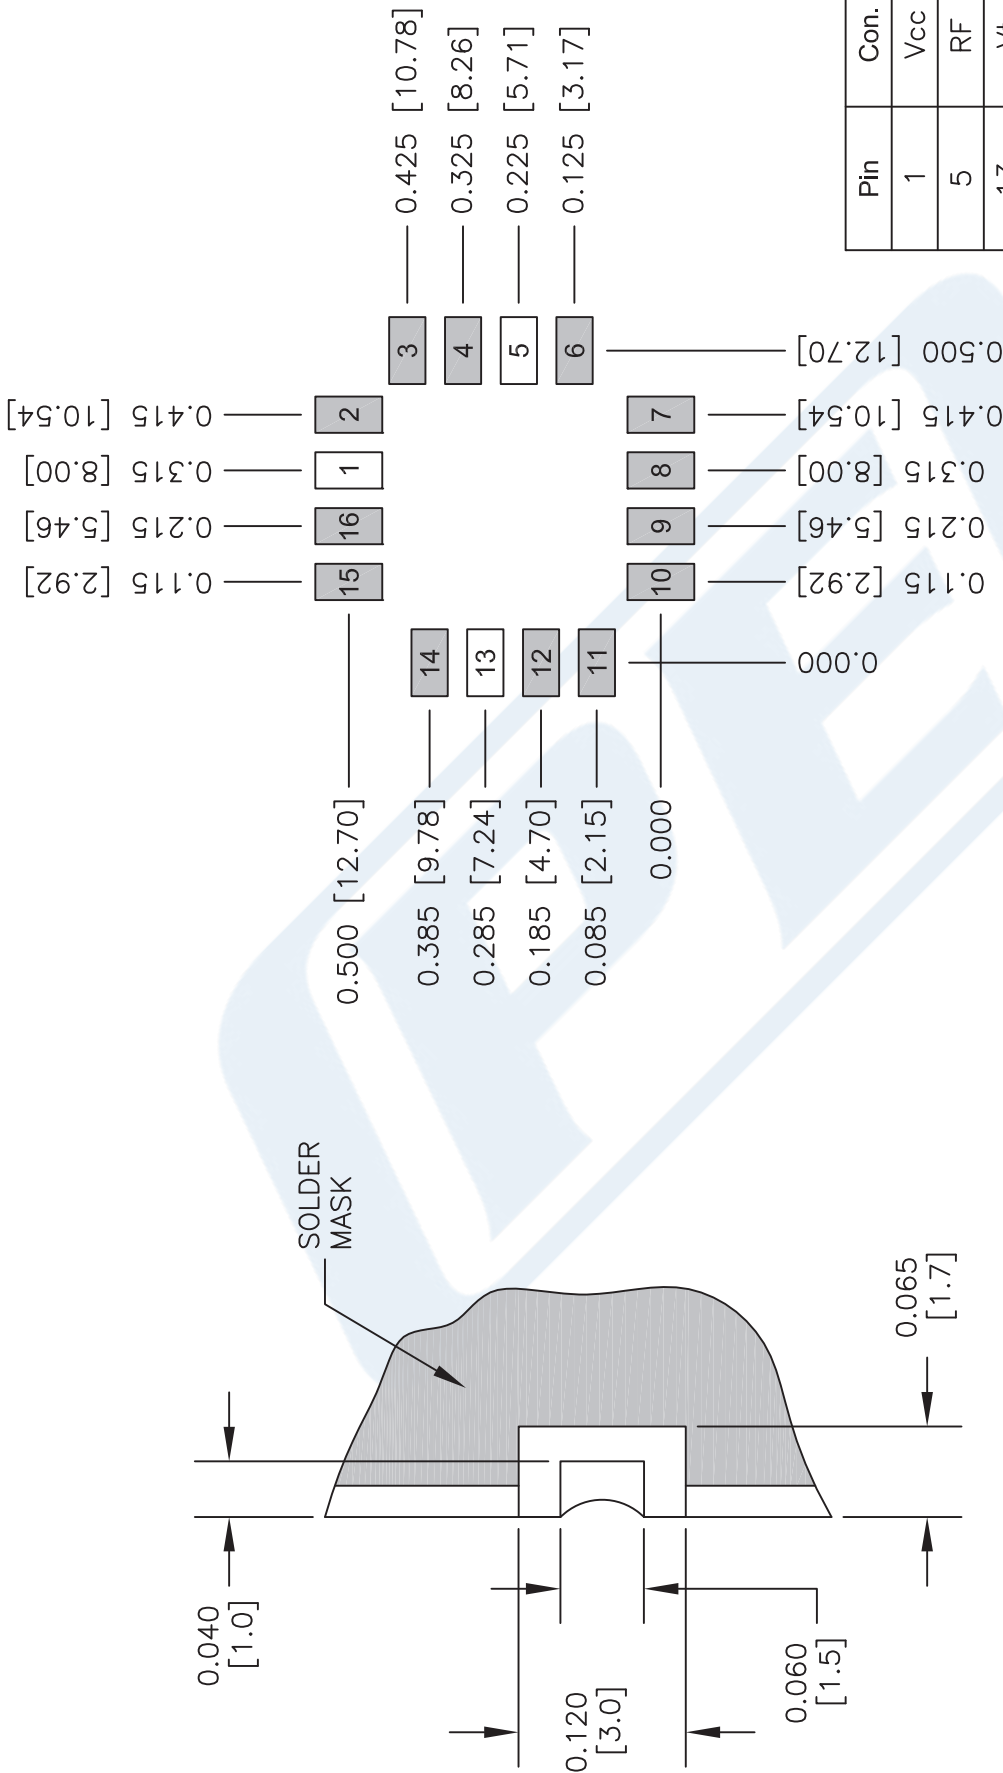

| Pin | Con. |
|--------|-----------------|
| 1 | V _{CC} |
| 5 | RF |
| 13 | V _t |
| Others | GND |

- NOTES:**
1. THE CASE IS GROUND.
 2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [mm].
 3. UNLESS OTHERWISE SPECIFIED FINISH IS 150-250 MICRO INCHES ELECTROLESS NICKEL OVER COPPER CLAD PCB, 2-5 MICRO INCHES IMMERSION GOLD, OVER NICKEL.
 4. MOD PORT NOT AVAILABLE ON ALL MODELS.

DWG TITLE

PE1V11021

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PASTERNACK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 021216

SCALE N/A

SIZE A

2233

PE1V11021 CAD Drawing

0.5 inch Commercial Surface Mount (SMT) Voltage Controlled Oscillator (VCO) From 1.5 GHz to 2.5 GHz With Phase Noise of -84 dBc/Hz

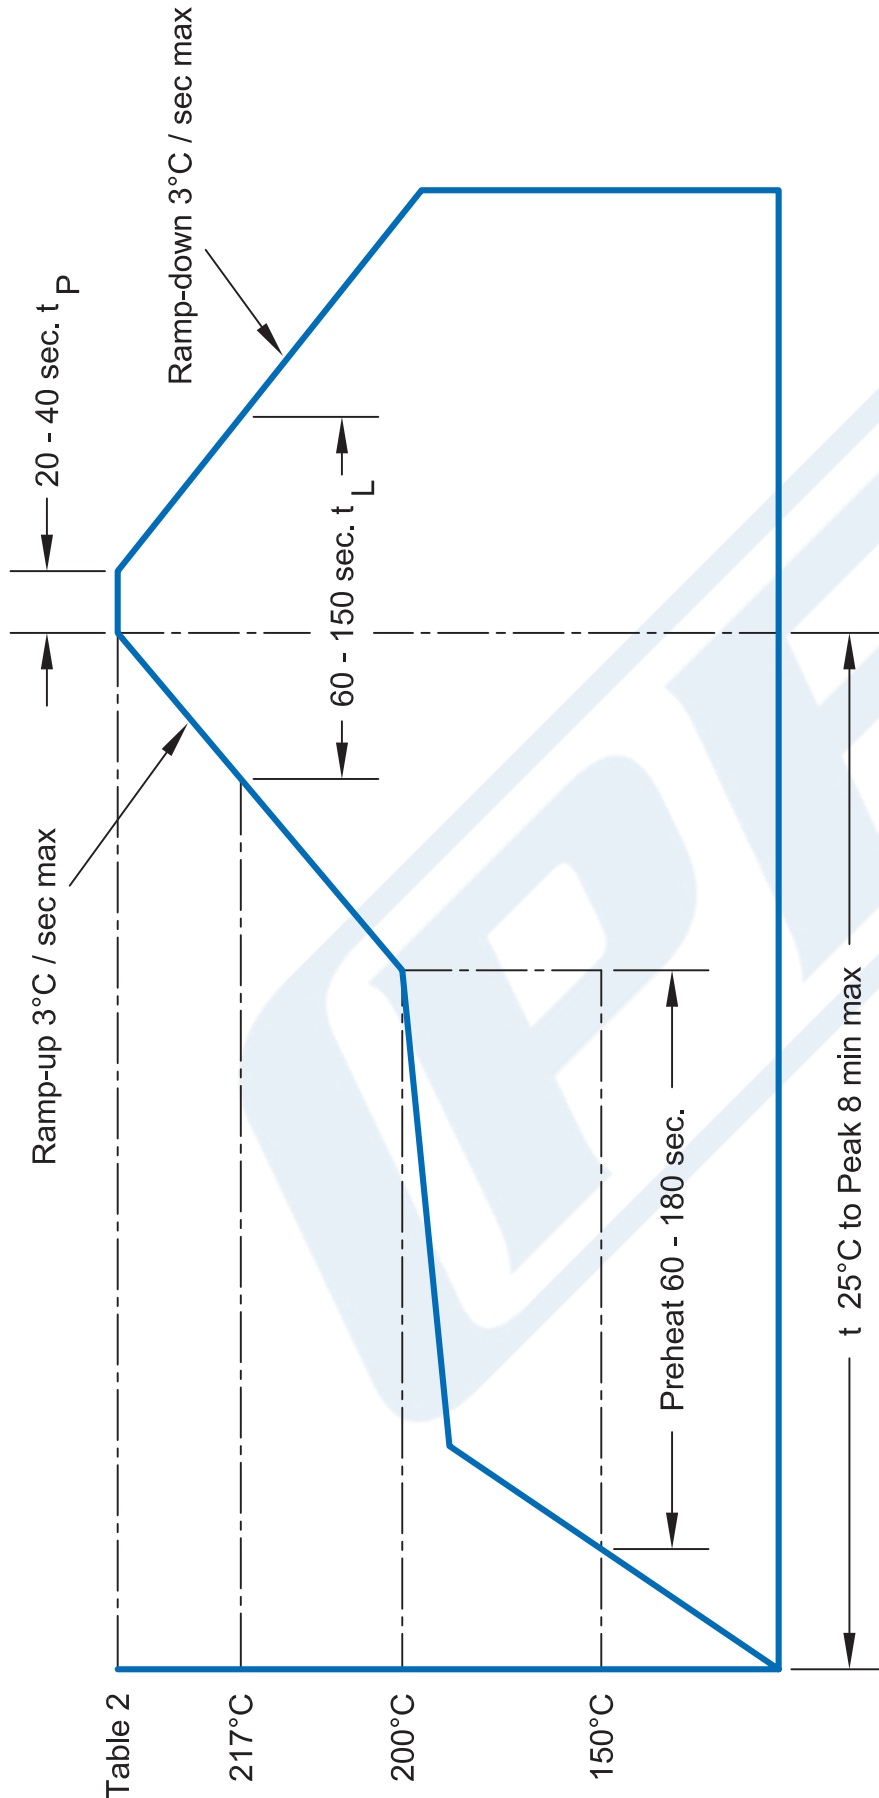


Table 2

217°C

200°C

150°C

Preheat 60 - 180 sec.

t 25°C to Peak 8 min max

Table 1

Hand Soldering

| Item | Condition |
|-------------------|---------------------------------------|
| Tip Temp. (max.) | 260° |
| Iron Power (max.) | 20 W |
| Time (max.) | 3 Sec. |
| Note. | Avoid excess pressure to castelations |

Table 2

Package re-flow temp

| Pkg. | tp (°C) |
|---------------|---------|
| PE2V Series | 260 |
| PE1V11 Series | 245 |
| All Others | 245 |

NOTES:

1. ALL VCO'S HAVE A MS RATING OF 1
2. ALL PRODUCTS CONFORM TO JEDEC J-STD-020C FOR LEAD FREE PROCESSING.

DWG TITLE

PE1V11021

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE

021216

SCALE N/A

SIZE A

2233