



4 Way N Power Divider from 2 GHz to 4 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE2040

Electrical Specifications

Design Reactive
Number of Output Ports 4

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		4	GHz
Impedance		50		Ohms
Input VSWR			1.4:1	
Insertion Loss			0.8	dB
Isolation	20			dB
Phase Balance			±4	Degrees
Input Power (CW)			30	Watts

Mechanical Specifications

Size
Length 4 in [101.6 mm]
Width 1.62 in [41.15 mm]
Height 1 in [25.4 mm]
Weight 0.845 lbs [383.29 g]

Configuration
Input Connector N Female

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


4 Way N Power Divider from 2 GHz to 4 GHz Rated at 30 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way N Power Divider from 2 GHz to 4 GHz Rated at 30 Watts PE2040](#)

URL: <https://www.pasternack.com/4-way-n-power-divider-4-ghz-pe2040-p.aspx>

PE2040 CAD Drawing

4 Way N Power Divider from 2 GHz to 4 GHz Rated at 30 Watts

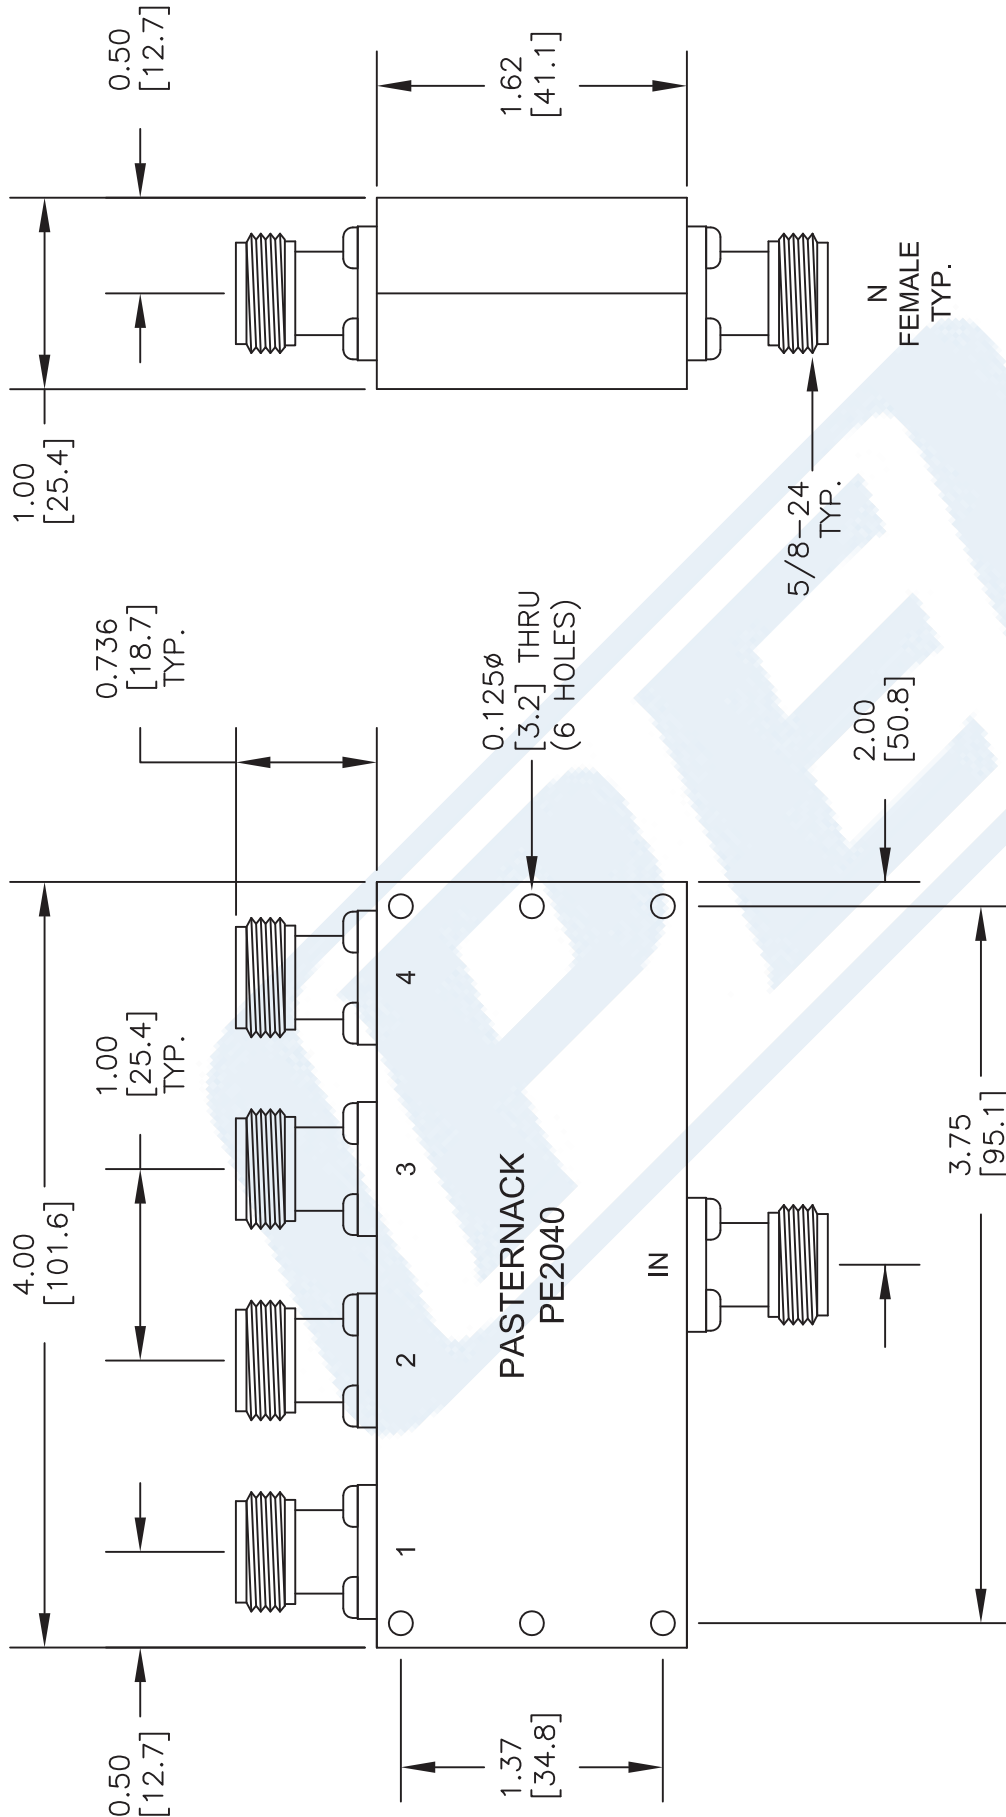

DWG TITLE

PE2040

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAGE CODE 53919

CAD FILE 051717

SCALE N/A

SIZE A

2233