



## Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts

### Couplers Technical Data Sheet

PE2201-20

#### Features

- Directional Coupler
- 1 to 2 GHz Frequency Range
- Coupling  $20 \pm 1.25$  dB
- Directivity > 25 dB
- Low VSWR < 1.1:1
- Max Power 50 Watts (CW)

#### Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

#### Description

Directional couplers are indispensable components for isolating, separating and combining signals. For example, they provide a simple way of sampling microwave signals. They also can make accurate attenuator measurements since reflections are eliminated. The PE2201-20 is a 20 dB directional coupler that operates from 1 to 2 GHz and can handle up to 50 Watts (CW) with 25 dB directivity minimum and 1.1:1 VSWR maximum. The package interface uses SMA female connectors, and is also REACH and RoHS compliant.

The PE2201-20 is part of Pasternack's family of directional/dual-directional couplers that offer coupling ratios up to 50 dB with excellent performance featuring high directivity, low insertion loss and VSWR. They are available in both narrow and broad bandwidths and can be used in a wide variety of applications including signal sampling, VSWR measurements, power combining and distribution.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	1		2	GHz
Impedance		50		Ohms
Coupling		$20 \pm 1.25$		dB
Frequency Sensitivity			$\pm 0.75$	dB
Insertion Loss			0.2	dB
Directivity	25			dB
Main Line VSWR			1.1:1	
Secondary Line VSWR			1.1:1	
Input Power (CW)			50	Watts

#### Electrical Specification Notes:

Values at 25°C, sea level.

Insertion loss does not include coupled power.

Max input power rated for load VSWR better than 1.20:1.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts PE2201-20](#)

Directional 20 dB SMA Coupler From 1 GHz  
to 2 GHz Rated to 50 Watts



Couplers Technical Data Sheet

PE2201-20

**Mechanical Specifications**

**Size**

Length	1.84 in [46.74 mm]
Width/Dia.	0.4 in [10.16 mm]
Height	1.19 in [30.23 mm]
Weight	0.063 lbs [28.58 g]

**Configuration**

Package Type	Connectorized
Input Connector	SMA Female
Output Connector	SMA Female
Coupled Connectors	SMA Female

**Environmental Specifications**

**Temperature**

Operating Range	-25 to +80 deg C
Storage Range	-55 to +150 deg C

Humidity	MIL-STD-202, Method 106 (90% relative humidity, +65°C)
----------	--

Shock	MIL-STD-202, Method 213/I (100 G's, 6 ms)
Vibration	MIL-STD-202, Method 204/D (10 to 2,000 Hz, 20 G's, 12 hours)

Altitude	MIL-STD-202, Method 105/E (150,000 feet)
Thermal Shock	MIL-STD-202, Method 107/B (-55°C to +85°C)

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts PE2201-20](#)


Directional 20 dB SMA Coupler From 1 GHz  
to 2 GHz Rated to 50 Watts



Couplers Technical Data Sheet

PE2201-20

Typical Performance Data

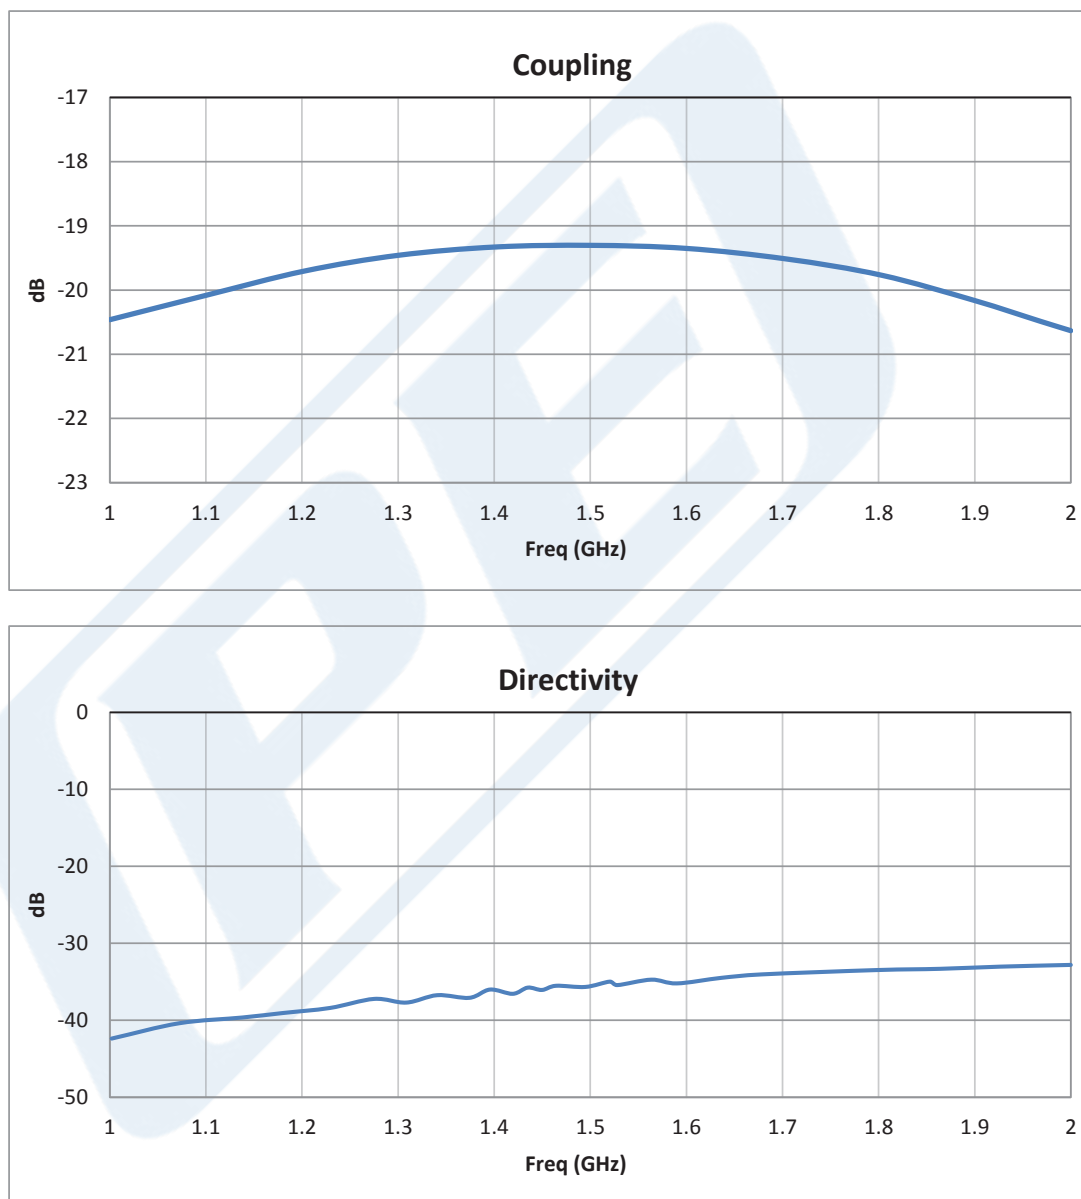



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts PE2201-20](#)

Directional 20 dB SMA Coupler From 1 GHz  
to 2 GHz Rated to 50 Watts



Couplers Technical Data Sheet

PE2201-20

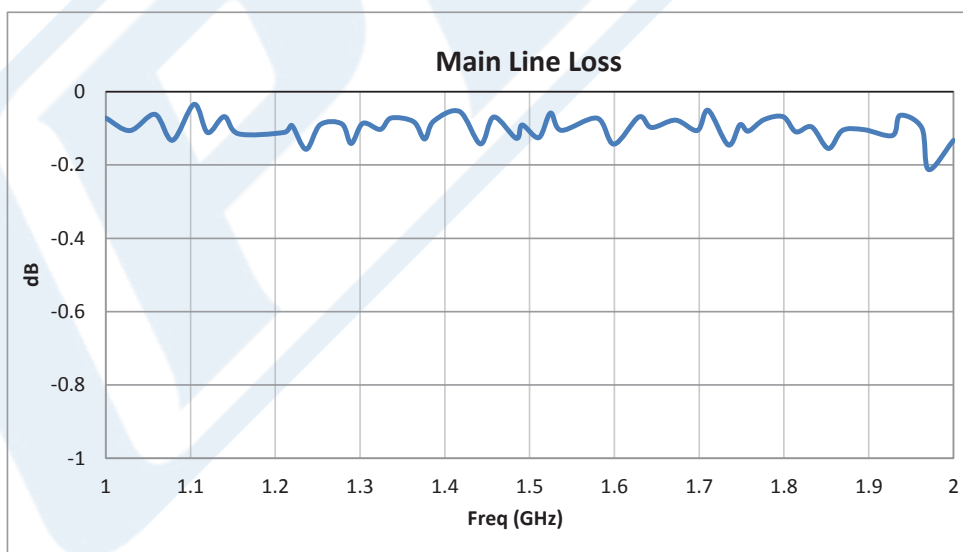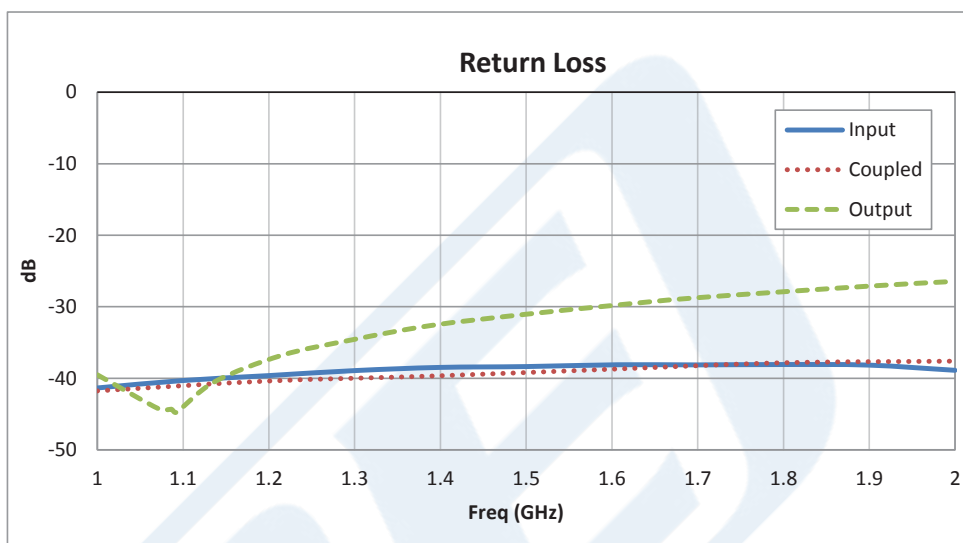

Main line loss is the difference in power level between input and output.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts PE2201-20](#)

## Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts



### Couplers Technical Data Sheet

PE2201-20

Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts PE2201-20](https://www.pasternack.com/directional-20-db-sma-coupler-1-2-ghz-50-watts-pe2201-20-p.aspx)



URL: <https://www.pasternack.com/directional-20-db-sma-coupler-1-2-ghz-50-watts-pe2201-20-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE2201-20 CAD Drawing

Directional 20 dB SMA Coupler From 1 GHz to 2 GHz Rated to 50 Watts

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR MC2017-20	1/13/2020	S.PONG

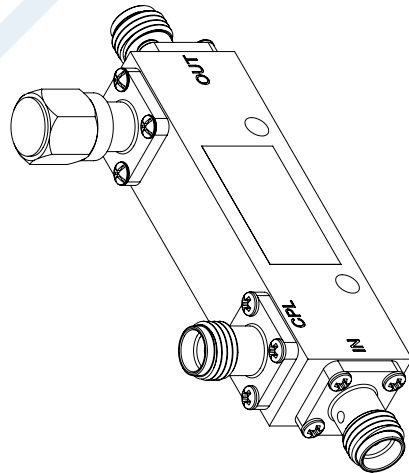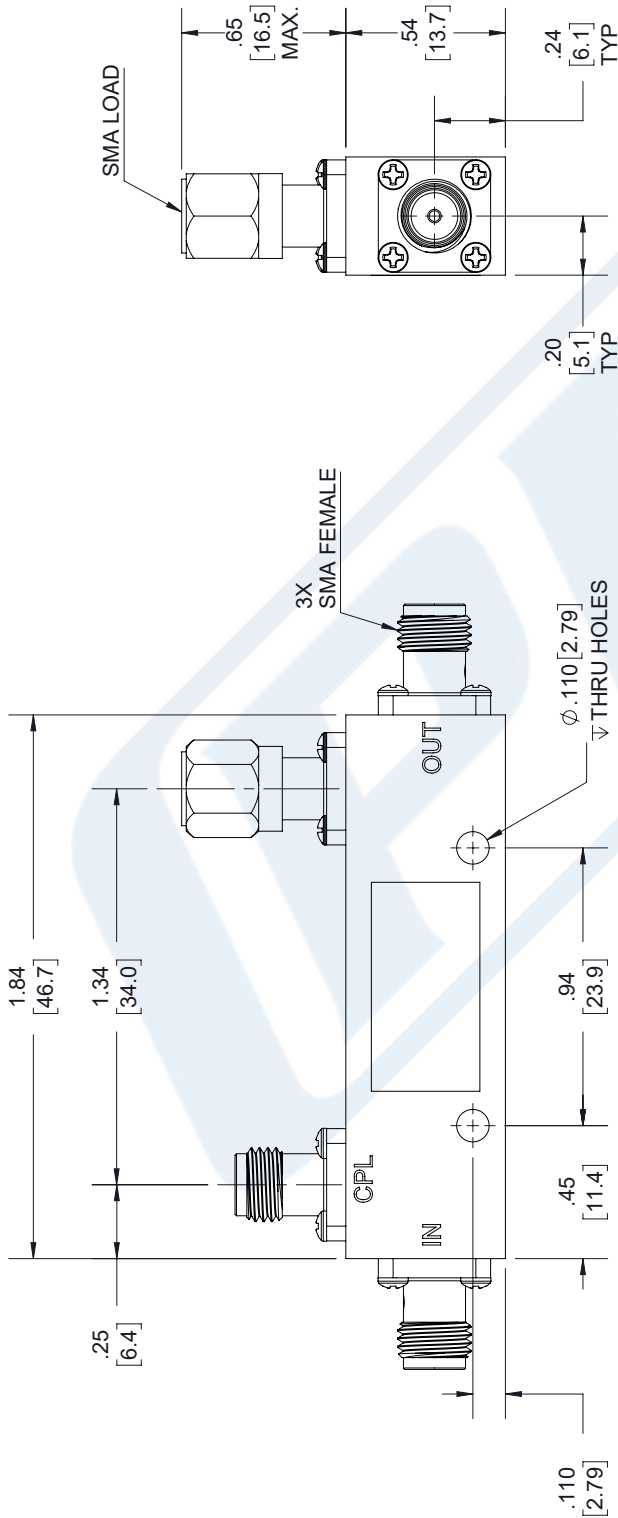

LABEL:

PASTERNAK  
PE2201-20  
D/C: YYWW

<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.</p>		<p>SHEET 1 OF 1</p>
<p>SCALE N/A</p>		<p>REV A</p>
<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>.X = ±.2 [5.08] FRACTIONS ±.02 [.51] ±.1/32 .XXX = ±.005 [.13] ANGLES ± 1°</p> <p>CABLE LENGTH (L) TOLERANCES:</p> <p>L ≤ 12 [305] = +1 [25] / -0</p> <p>12 [305] &lt; L ≤ 60 [1524] = +2 [51] / -0</p> <p>60 [1524] &lt; L ≤ 120 [3048] = +4 [102] / -0</p> <p>120 [3048] &lt; L ≤ 300 [7620] = +6 [152] / -0</p> <p>300 [7620] &lt; L = +5% L / -0</p> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>		<p>ITEM NO. PE2201-20</p>
<p>SIZE A</p>		<p>DRAWN BY K.DANG</p>



Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.