



Directional 30 dB SMA Coupler From 7.5 GHz to 16 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2206-30

Directional 30 dB SMA Coupler From 7.5 GHz to 16 GHz Rated To 50 Watts

Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	Female
Design	Directional Coupler

Electrical Specifications

Frequency Range, GHz	7.5 to 16
Directivity, dB	15
Impedance, Ohms	50
Maximum Insertion Loss, dB	0.5
Maximum Input Power, Watts	50
Maximum Input VSWR	1.4:1
Coupling Value, dB	30
Coupling Tolerance, dB	± 1.25
Frequency Sensitivity, dB	0.75

Mechanical Specifications

Size

Length, in [mm]	1.75 [44.45]
Width, in [mm]	0.38 [9.65]
Height, in [mm]	1.25 [31.75]

Connector 1

Type	SMA Female
------	------------

Connector 2

Type	SMA Female
------	------------

Connector 3

Type	Female
------	--------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB SMA Coupler From 7.5 GHz to 16 GHz Rated To 50 Watts PE2206-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Directional 30 dB SMA Coupler From 7.5 GHz
to 16 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2206-30

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Directional 30 dB SMA Coupler From 7.5 GHz to 16 GHz Rated To 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB SMA Coupler From 7.5 GHz to 16 GHz Rated To 50 Watts PE2206-30](http://www.pasternack.com/directional-30-db-sma-coupler-7.5-16-ghz-50-watts-pe2206-30-p.aspx)

URL: <http://www.pasternack.com/directional-30-db-sma-coupler-7.5-16-ghz-50-watts-pe2206-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2206-30 CAD Drawing

Directional 30 dB SMA Coupler From 7.5 GHz to 16 GHz Rated To 50 Watts

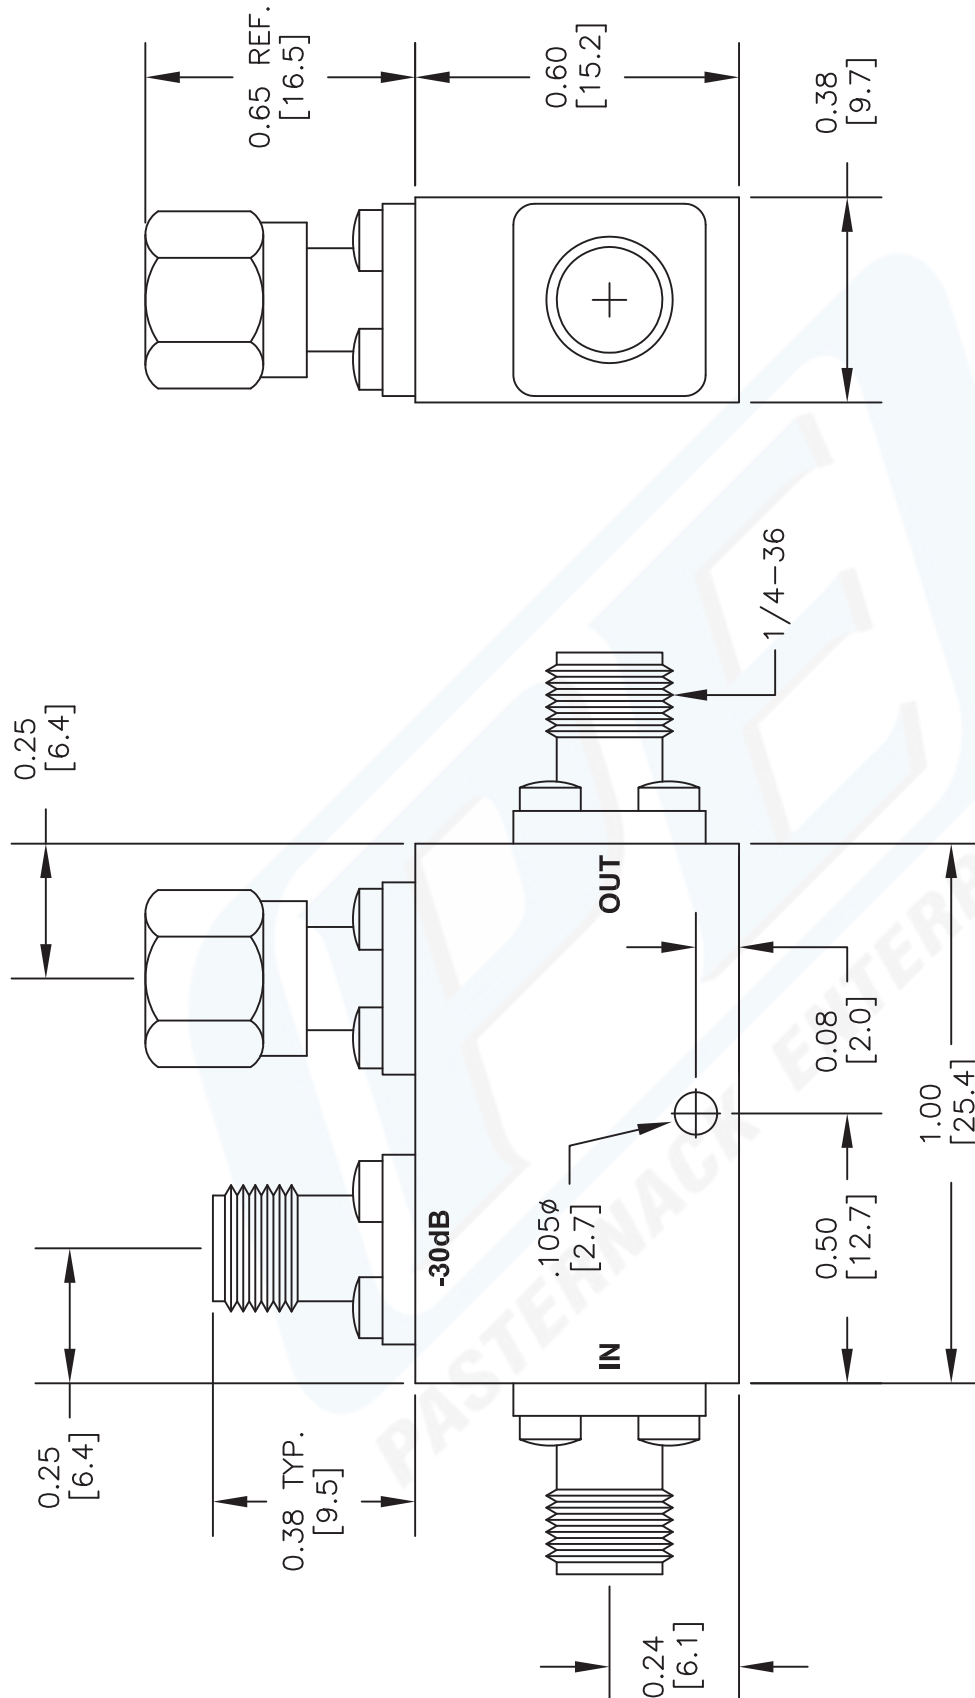

DWG TITLE

PE2206-30

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



PASTERNAK ENTERPRISES®
 ESTABLISHED 1972

FSCM NO. 53919

REV. B

CAD FILE 032612

SCALE N/A

SIZE A

2233