



TNC Male to TNC Male Low Loss Cable  
36 Inch Length Using PE-C600 Coax

**RF Cable Assemblies Technical Data Sheet**

**PE3W00088/HS-36**

**Configuration**

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: PE-C600

**Features**

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket
- 500 Mating Cycles


**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W00088/HS-36 TNC male to TNC male 36 inch cable using PE-C600 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible PE-C600 coax. The PE3W00088/HS-36 TNC male to TNC male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

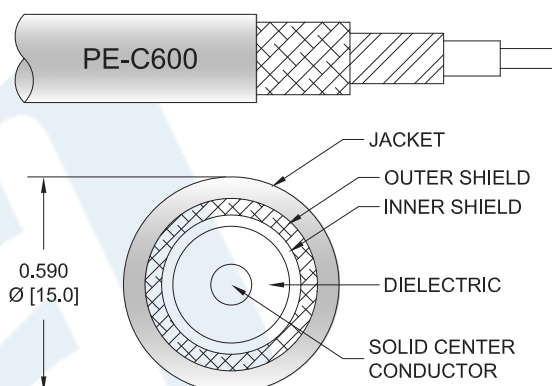

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax PE3W00088/HS-36](#)



## TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W00088/HS-36**

#### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 5.8     | GHz          |
| VSWR                    |         |              | 1.4:1   |              |
| Velocity of Propagation |         | 87           |         | %            |
| RF Shielding            | 90      |              |         | dB           |
| Capacitance             |         | 23.4 [76.77] |         | pF/ft [pF/m] |
| Jacket Spark            |         |              | 5,000   | Vrms         |

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.25 | 0.5  | 1    | 2.5  | 5.8  | GHz   |
| Insertion Loss (Typ.) | 0.23 | 0.25 | 0.27 | 0.33 | 0.41 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector

#### Mechanical Specifications

##### Cable Assembly

|          |                     |
|----------|---------------------|
| Length*  | 36 in [914.4 mm]    |
| Diameter | 0.75 in [19.05 mm]  |
| Weight   | 0.63 lbs [285.76 g] |

##### Cable

|                                      |                      |
|--------------------------------------|----------------------|
| Cable Type                           | PE-C600              |
| Impedance                            | 50 Ohms              |
| Inner Conductor Type                 | Solid                |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type                      | PE (F)               |
| Number of Shields                    | 2                    |
| Shield Layer 1                       | Aluminum Tape        |
| Shield Layer 2                       | Tinned Copper Braid  |
| Jacket Material                      | PE, Black            |
| Jacket Diameter                      | 0.59 in [14.99 mm]   |
| Repeated Minimum Bend Radius         | 6 in [152.4 mm]      |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax PE3W00088/HS-36](#)



TNC Male to TNC Male Low Loss Cable  
36 Inch Length Using PE-C600 Coax

## RF Cable Assemblies Technical Data Sheet

**PE3W00088/HS-36**

### Connectors

| Description                       | Connector 1            | Connector 2            |
|-----------------------------------|------------------------|------------------------|
| Type                              | TNC Male               | TNC Male               |
| Impedance                         | 50 Ohms                | 50 Ohms                |
| Mating Cycles                     | 500                    | 500                    |
| Contact Material and Plating      | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Dielectric Type                   | PTFE                   | PTFE                   |
| Body Material and Plating         | Brass, Tri-Metal       | Brass, Tri-Metal       |
| Coupling Nut Material and Plating | Brass, Tri-Metal       | Brass, Tri-Metal       |

### Environmental Specifications

#### Temperature

Operating Range

-40 to +85 deg C

Storage Range

-40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax PE3W00088/HS-36](#)



## TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W00088/HS-36**

#### How to Order

Part Number Configuration:

**PE3W00088/HS**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W00088/HS-12 = 12 inches long cable  
PE3W00088/HS-100cm = 100 cm long cable

TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax PE3W00088/HS-36](#)


URL: <https://www.pasternack.com/tnc-male-tnc-male-pe-c600-cable-assembly-pe3w00088-hs-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W00088/HS-36 CAD Drawing

TNC Male to TNC Male Low Loss Cable 36 Inch Length Using PE-C600 Coax

| REVISIONS |                 |           |          |
|-----------|-----------------|-----------|----------|
| REV.      | DESCRIPTION     | DATE      | APPROVED |
| A         | INITIAL RELEASE | 3/10/2020 | SELLIS   |

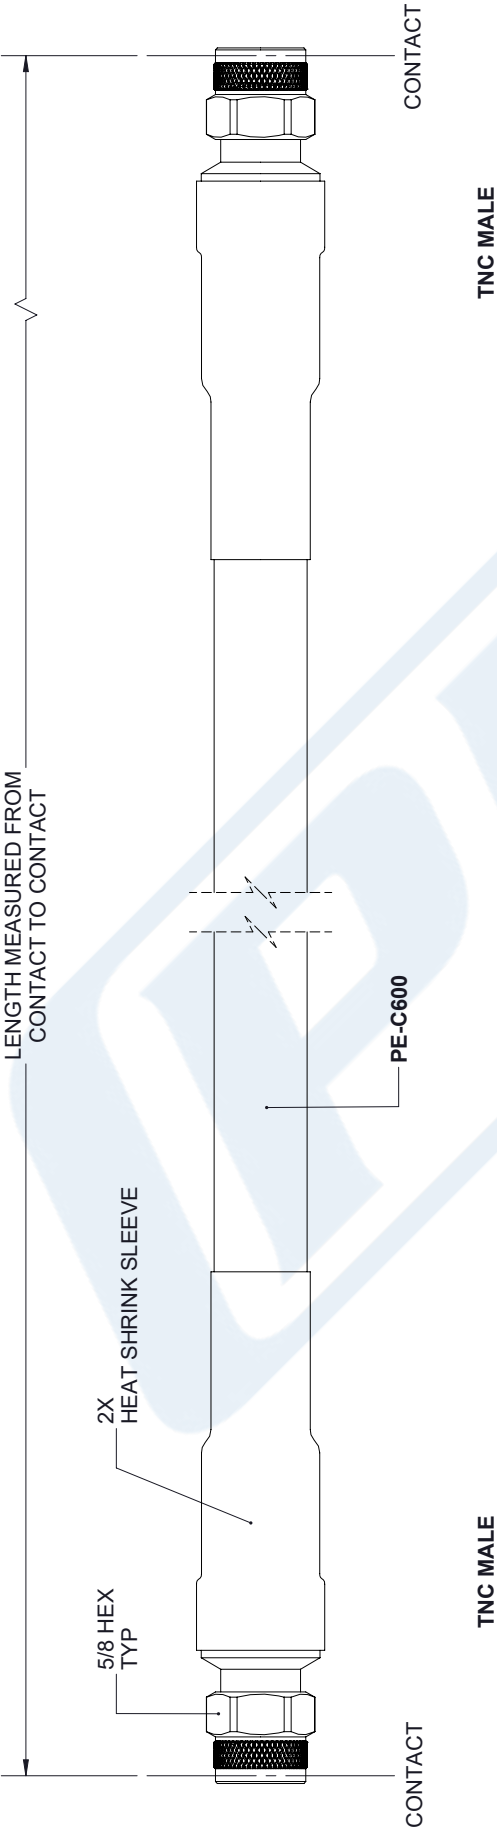

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

|               |       |             |
|---------------|-------|-------------|
| .X = ± .2     | [.08] | FRACTIONS   |
| .XX = ± .02   | [.51] | ± 1/32      |
| .XXX = ± .005 | [.13] | ANGLES ± 1° |

CABLE LENGTH (L) TOLERANCES:

|                             |                 |
|-----------------------------|-----------------|
| L ≤ 12 [305]                | = +1 [25] / -0  |
| 12 [305] < L ≤ 60 [1524]    | = +2 [51] / -0  |
| 60 [1524] < L ≤ 120 [3048]  | = +4 [102] / -0 |
| 120 [3048] < L ≤ 300 [7620] | = +6 [152] / -0 |
| 300 [7620] < L =            | +5% L / -0      |

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITI brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

SIZE A

CAGE CODE 53919

DRAWN BY K.DANG

ITEM NO. PE3W00088/HS

REV A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.