



Bordeaux FAKRA Jack to FAKRA Jack Right Angle  
Cable 50 cm Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3W02943-50CM

### Configuration

- Connector 1: FAKRA Jack
- Connector 2: FAKRA Jack Right Angle
- Cable Type: LMR-100A

### Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket



### Applications

- General Purpose
- Laboratory Use

### Description

Pasternack's PE3W02943-50CM bordeaux FAKRA jack to FAKRA jack right angle 50 cm cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack FAKRA to FAKRA cable assembly has a jack to jack gender configuration with 50 ohm flexible LMR-100A coax. The PE3W02943-50CM FAKRA jack to FAKRA jack cable assembly operates to 3 GHz. The right angle FAKRA interface on the LMR-100A cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax PE3W02943-50CM](#)



## Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W02943-50CM

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.41	0.49	0.57	0.68	1	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1dB per connector.

#### Mechanical Specifications

##### Cable Assembly

Length*	19.69 in [500.13 mm]
Diameter	0.37 in [9.4 mm]

##### Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax PE3W02943-50CM](#)



## Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax

### RF Cable Assemblies Technical Data Sheet

PE3W02943-50CM

Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	FAKRA Jack	FAKRA Jack Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	Brass, Nickel
Body Material and Plating	Plastic	Plastic

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax PE3W02943-50CM](#)




Bordeaux FAKRA Jack to FAKRA Jack Right Angle  
Cable 50 cm Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3W02943-50CM

Typical Performance Data

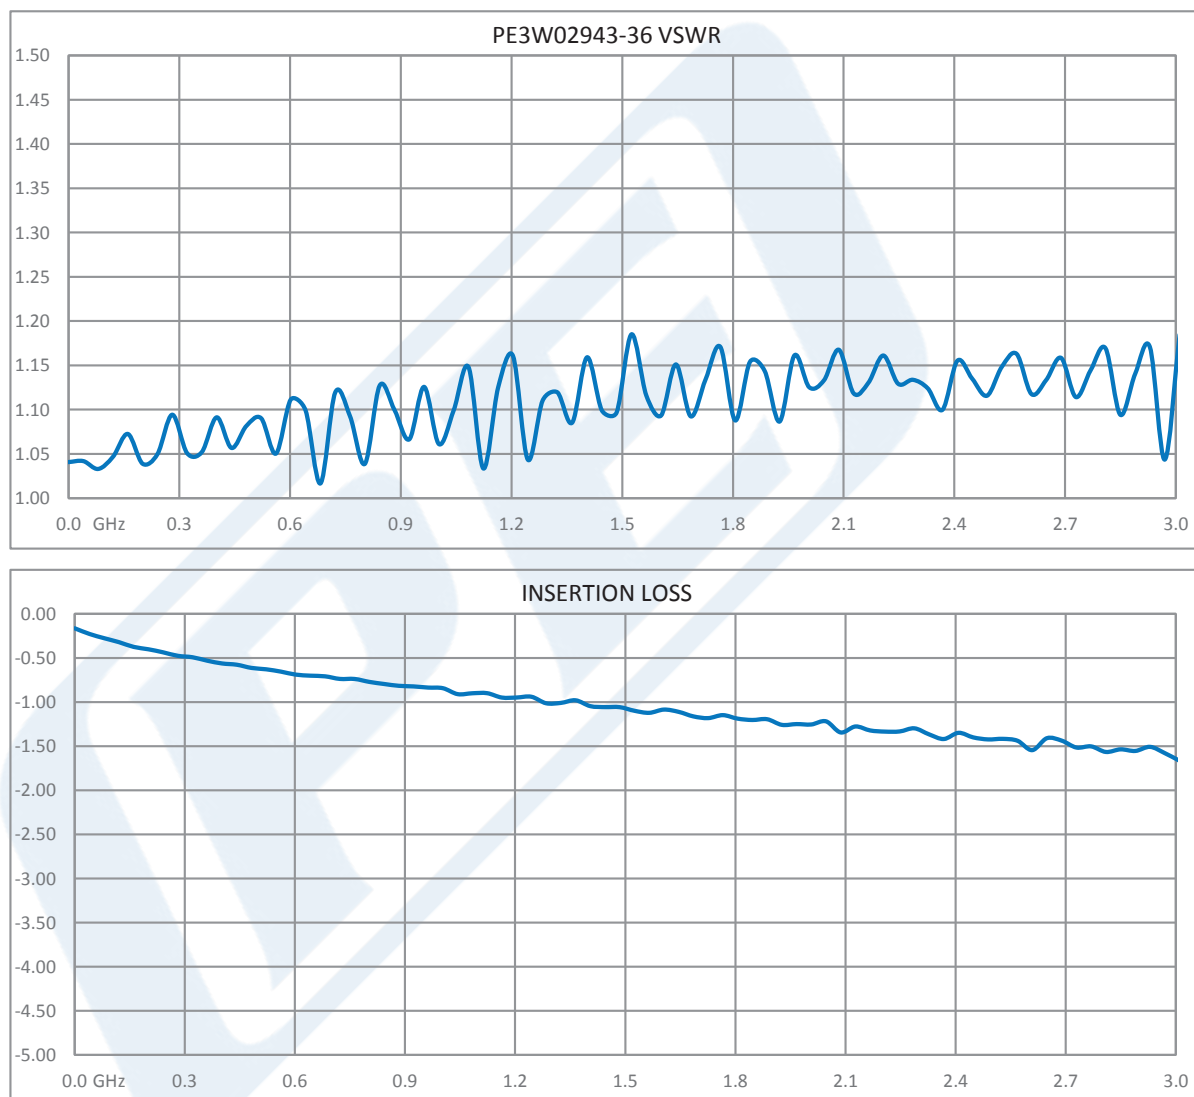

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax PE3W02943-50CM](#)



Bordeaux FAKRA Jack to FAKRA Jack Right Angle  
Cable 50 cm Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3W02943-50CM

**How to Order**

Part Number Configuration:

**PE3W02943**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W02943-12 = 12 inches long cable  
PE3W02943-100cm = 100 cm long cable


Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Bordeaux FAKRA Jack to FAKRA Jack Right Angle Cable 50 cm Length Using LMR-100 Coax PE3W02943-50CM](https://www.pasternack.com/fakra-jack-fakra-jack-lmr100-cable-assembly-pe3w02943-50cm-p.aspx)

URL: <https://www.pasternack.com/fakra-jack-fakra-jack-lmr100-cable-assembly-pe3w02943-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W02943-50CM CAD Drawing**  
Bordeaux FAKRA Jack to FAKRA Jack Right Angle  
Cable 50 cm Length Using LMR-100 Coax

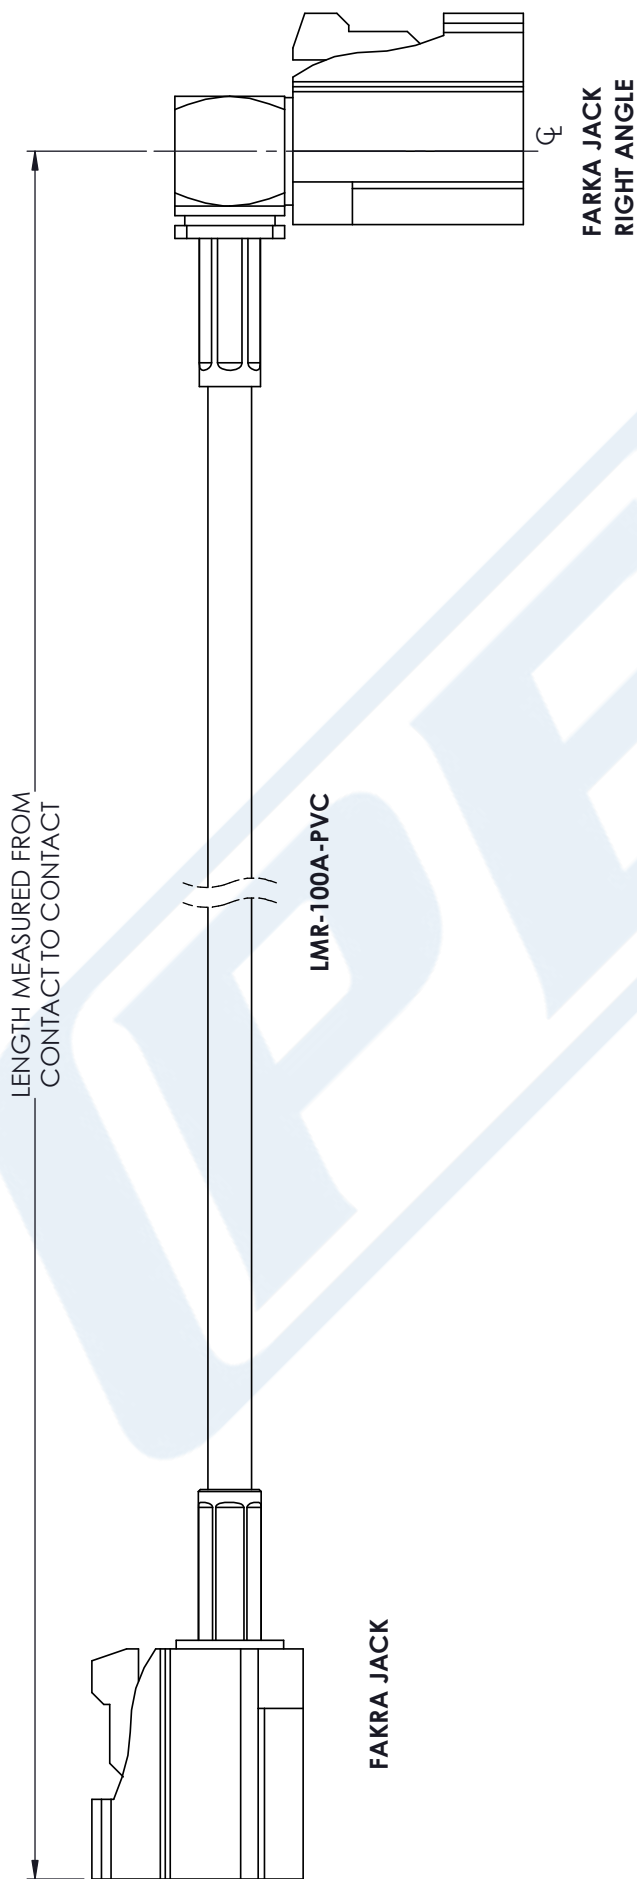

STANDARD TOLERANCES
.X ±0.2
.XX ±0.01
.XXX ±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
PE3W02943

CAGE CODE 53919

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 06/13/18

SCALE N/A

SIZE A

CN2379