

2.92mm Male Connector Solder Attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN, RG402



RF Connectors Technical Data Sheet

PE4987

Configuration

- 2.92mm Male Connector
- 50 Ohms
- Straight Body Geometry
- PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-
- SR402TN, RG402 Interface Type
- Solder Attachment
- 5/16 inch Hex

Features

• Gold over Nickel Plated Beryllium Copper Contact

• 50 µin minimum contact plating

Applications

• General Purpose Test

• Custom Cable Assemblies

Description

Pasternack's PE4987 2.92mm male connector with solder attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN and RG402 is part of our full line of RF components available for same-day shipping.

Our 2.92mm male connector PE4987 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Mechanical Specifications

Size

 Length
 0.37 in [9.4 mm]

 Width/Dia.
 0.312 in [7.92 mm]

 Weight
 0.006 lbs [2.72 g]

Mating Torque 8 to 10 in-lbs [0.90 to 1.13 Nm]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold over Nickel 50 μin minimum
Insulation	PCTFE	
Body	Stainless Steel	Gold over Nickel 50 μin minimum
Coupling Nut	Stainless Steel	Gold over Nickel 50 μin minimum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.92mm Male Connector Solder Attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN, RG402 PE4987

d UL



2.92mm Male Connector Solder Attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN, RG402



RF Connectors Technical Data Sheet

PF4987

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

2.92mm Male Connector Solder Attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN, RG402 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.92mm Male Connector Solder Attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN, RG402 PE4987

URL: https://www.pasternack.com/2.92mm-male-standard-pe-sr402al-pe-sr402fl-rg402-connector-pe4987-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



ISO 9001 : 2008 Registered

PE4987 CAD Drawing

2.92mm Male Connector Solder Attachment for PE-SR402AL, PE-SR402FL, PE-SR402FLJ, PE-SR402TN, RG402

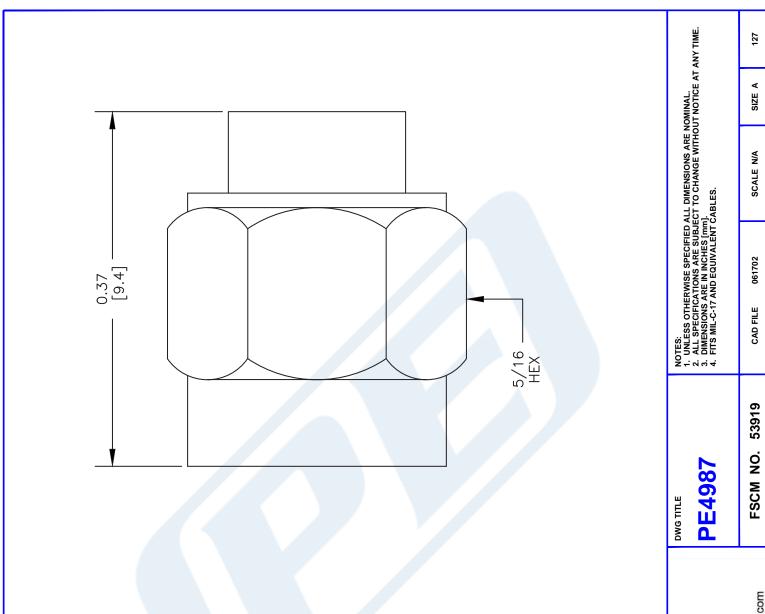



Pasternack Enterprises, Inc. P.O. Box 16759 | Irvine | CA | 92623

Website: www.pasternack.com | E-Mail: sales@pasternack.com Phone: (949) 261-1920 | Fax: (949) 261-7451

STRIP CABLE AS SHOWN. DO NOT NICK CENTER

CONDUCTOR.

ASSEMBLY PROCEDURES

SHIM 0.008 [0.2] SOLDER CONTACT (1) TO CENTER CONDUCTOR.

ĸi

SLIDE COUPLING NUT (2) OVER CABLE. SLIDE

BODY (3) OVER CONTACT UNTIL IT BOTTOMS OUT TO OUTER CONDUCTOR. SOLDER BODY (3)

TO OUTER CONDUCTOR.

INSTALL GASKET (4) ONTO BODY (3). INSERT

რ

INSULATOR (5) INTO BODY (3) & SLIDE

COUPLING NUT OVER ASSEMBLY.