



BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax

RF Cable Assemblies Technical Data Sheet

PE3087-96

Configuration

- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: RG223

Features

- Max Frequency 4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3087-96 BNC male to BNC male 96 inch cable using RG223 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG223 coax. The PE3087-96 BNC male to BNC male cable assembly operates to 4 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

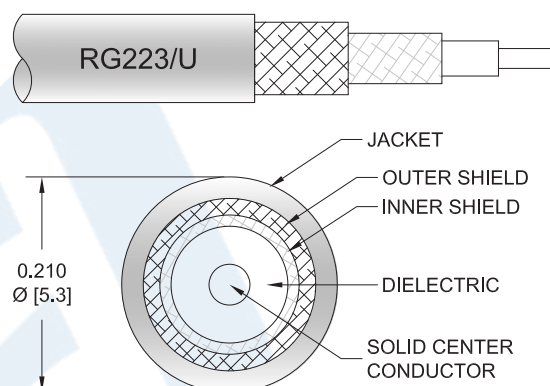

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax PE3087-96](#)



BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax

RF Cable Assemblies Technical Data Sheet

PE3087-96

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------------|---------|--------------|
| Frequency Range | DC | | 4 | GHz |
| Velocity of Propagation | | 66 | | % |
| Capacitance | | 30.8 [101.05] | | pF/ft [pF/m] |
| Operating Voltage (AC) | | | 500 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 4 | GHz |
| Insertion Loss (Max.) | 0.52 | 0.84 | 0.92 | 1.24 | 2.52 | dB |

Mechanical Specifications

Cable Assembly

| | |
|----------|----------------------|
| Length* | 96 in [243.84 cm] |
| Diameter | 0.571 in [14.5 mm] |
| Weight | 0.322 lbs [146.06 g] |

Cable

| | |
|--------------------------------------|----------------------------|
| Cable Type | RG223 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper, Silver |
| Dielectric Type | PE |
| Number of Shields | 2 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Shield Layer 2 | Silver Plated Copper Braid |
| Jacket Material | PVC, Black |
| Jacket Diameter | 0.209 in [5.31 mm] |
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax PE3087-96](#)



BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax

RF Cable Assemblies Technical Data Sheet

PE3087-96

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|-----------------|-----------------|
| Type | BNC Male | BNC Male |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 30 µin minimum | 30 µin minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100 µin minimum | 100 µin minimum |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Nickel |
| Coupling Nut Plating Specification | 100 µin minimum | 100 µin minimum |

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax PE3087-96](#)



BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax

RF Cable Assemblies Technical Data Sheet

PE3087-96

How to Order

Part Number Configuration:

PE3087

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number


Example: PE3087-12 = 12 inches long cable
PE3087-100cm = 100 cm long cable

BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to BNC Male Cable 96 Inch Length Using RG223 Coax PE3087-96](https://www.pasternack.com/bnc-male-bnc-male-rg223u-cable-assembly-pe3087-96-p.aspx)

URL: <https://www.pasternack.com/bnc-male-bnc-male-rg223u-cable-assembly-pe3087-96-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

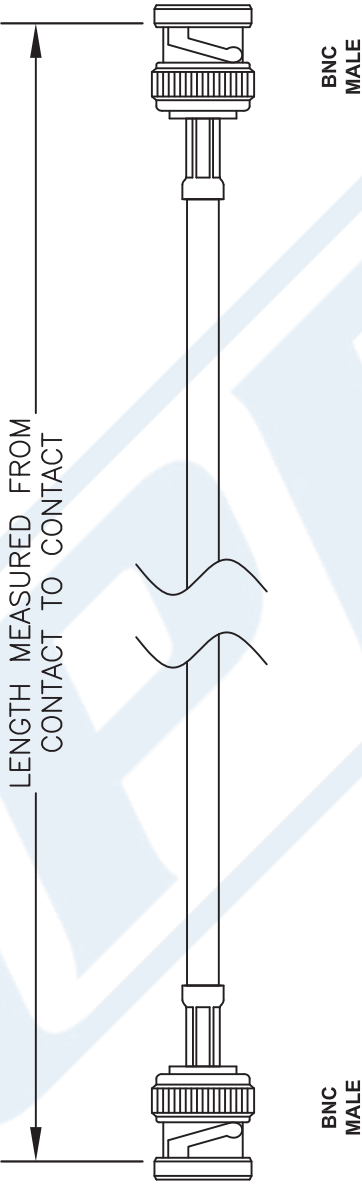

STANDARD TOLERANCES

.X

±0.2

.XX

±0.1

.XXX

±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PE

PASTERNAK®

THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

| | | | | | | | |
|----------------|--|----------|--|-------|--|------|--|
| DWG TITLE | | CAD FILE | | SCALE | | SIZE | |
| PE3087 | | 102016 | | N/A | | A | |
| FSCM NO. 53919 | | 41742 | | | | | |

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

© 2020 Pasternack Enterprises All Rights Reserved

PE3087-96 REV 1.4

5