



SP4T 0.03 dB Low Insertion Loss Repeatability  
Relay Latching Switch, Terminated, DC to 20 GHz,  
70W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data Sheet

PE71S6333

### Features

- DC to 20 GHz SP4T Switch
- Guaranteed Low Insertion loss Repeatability: 0.03 dB max over 10 Million Lifecycles
- Insertion Loss: 0.6 dB max
- Isolation: up to 80 dB min
- +24 Vdc Nominal Voltage
- Hot Switching: 1W CW max
- Latching Self Cutoff Actuator
- Position Indicators
- Guaranteed to meet MIL-STD-202 Environmental Conditions
- SMA connectors
- HE10 receptacle with ribbon cable and HE10 connector
- -25°C to +75°C Operating Temperature
- 10 Million Lifecycles Minimum

### Applications

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Research and Development
- Signal Monitoring Devices

### Description

The PE71S6333 is a single pole six throw (SP4T) terminated electromechanical switch that operates across a wide frequency range from DC to 20 GHz and has guaranteed insertion loss repeatability of 0.03 dB max over a life span of 10 million switching cycles in a Break Before Make condition. Maximum Insertion loss is 0.2 dB and Isolation is rated up to 85 dB minimum. The model also supports a hot switching limit of up to 1W CW maximum. The Latching Self Cut-Off actuator design includes indicators, a +24 Vdc operating voltage, and operates over a temperature range of -25°C to +75°C. The rugged and compact package assembly supports SMA connectors and an HE10 receptacle, ribbon cable, and HE10 connector for command control capability. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions that include temperature cycle, vibration, and shock.

### Electrical Specifications

Switch Type	SP4T, Terminated
Actuator Type	Latching
Switching Sequence	Break Before Make
Actuator Options	Indicators, Self Cut Off, Reset
Polarity	Positive Common

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		20	GHz
Impedance		50		Ohms
Operating Voltage	20	24	32	Volts
Actuating Current @ 24 Volts		200		mA
Insertion Loss			0.6	dB
Insertion Loss Repeatability			0.03	dB
Coil Resistance		120		Ohms
Third Order Intermodulation		-120		dBc
Input Power (CW)			70	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6333](#)



SP4T 0.03 dB Low Insertion Loss Repeatability  
Relay Latching Switch, Terminated, DC to 20 GHz,  
70W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data

PE71S6333

Switching Time	15	ms Max
----------------	----	--------

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 18	18 to 20		GHz
VSWR, Max	1.2:1	1.35:1	1.45:1	1.7:1		
Insertion Loss, Max	0.39	0.486	0.57	0.6		dB
Isolation, Min	100	90	80	80		dB

Electrical Specification Notes:  
Insertion Loss Repeatability at 25° is 0.03 dB

### Mechanical Specifications

#### Size

Length	1.25 in [31.75 mm]
Width/Diameter	1.25 in [31.75 mm]
Height	0.5 in [12.7 mm]
Weight	0.0527 lbs [23.9 g]
Body Material and Plating	Aluminum, Nickel
Package Type	Connectorized
Operating Life	10,000,000 Cycles

#### Connectors

RF Connector Type	SMA Female
RF Connector Contact Material and Plating	Beryllium Copper, Gold
RF Connector Body Material and Plating	Passivated Stainless Steel
Control Connector	HE 10

### Environmental Specifications

#### Temperature

Operating Range	-25 to +75 deg C
Storage Range	-55 to +85 deg C

Humidity	MIL-STD-202, Method 106E, Condition E, 65°C, 95% RH, 10 days
Shock	MIL-STD-202, method 213B, Condition G, 50g, 6 ms, 1/2 Sine, Operating
Vibration	MIL-STD-202, Method 204D, Condition D, 10-2000 Hz, 10g, Operating
Altitude	MIL-STD-202-Method 105C, Condition B, 50,000 feet (15,240 meters)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6333](#)



SP4T 0.03 dB Low Insertion Loss Repeatability  
Relay Latching Switch, Terminated, DC to 20 GHz,  
70W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data

PE71S6333

Temperature Cycling

EMI/RFI

Magnetic Field  
ESD Sensitivity



MIL-STD-202, Method 107D, Condition A, -55oC to +85oC, 10 cycles

MIL-STD-1344, Method 3008, or IEC 61726, 55 dB at 20 GHz

< 5x10-5 gauss at 1 meter


ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

### Typical Performance Data

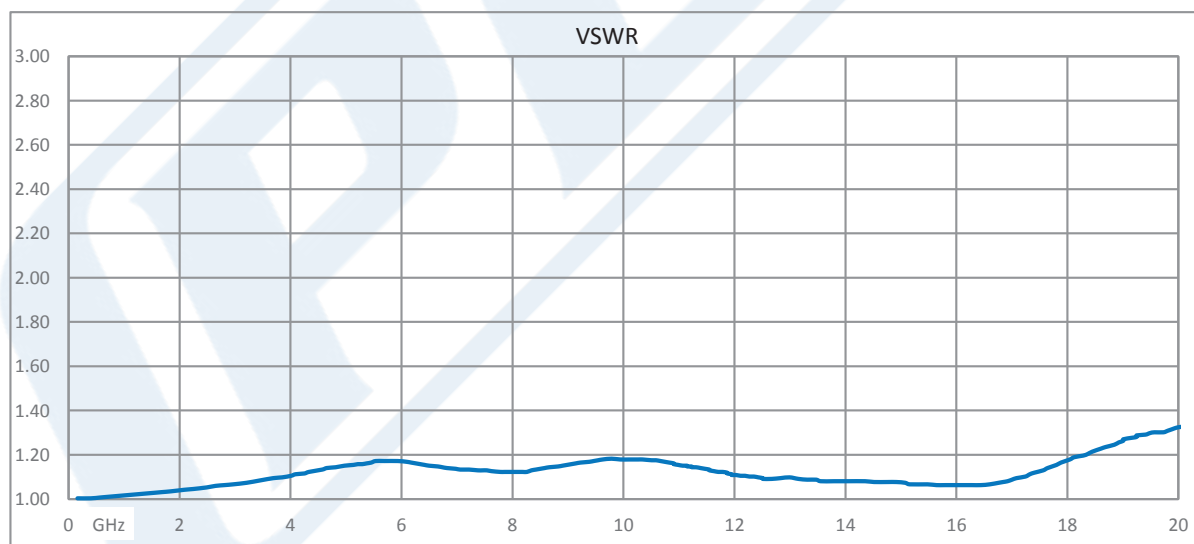

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6333](#)





SP4T 0.03 dB Low Insertion Loss Repeatability  
Relay Latching Switch, Terminated, DC to 20 GHz,  
70W, 24V, Indicators, Self Cut Off, SMA


## Electromechanical Relay Switches Technical Data

PE71S6333

### POWER RATING CHART


This graph is based on the following conditions :

- Ambient temperature : + 25°C
- Sea level
- V.S.W.R. : 1 and cold switching

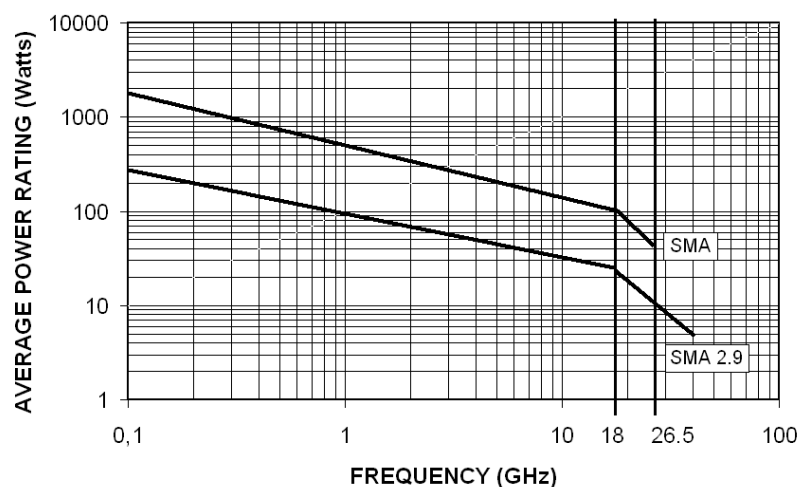

### DERATING FACTOR VERSUS V.S.W.R.

The average power input must be reduced for load V.S.W.R. above 1.

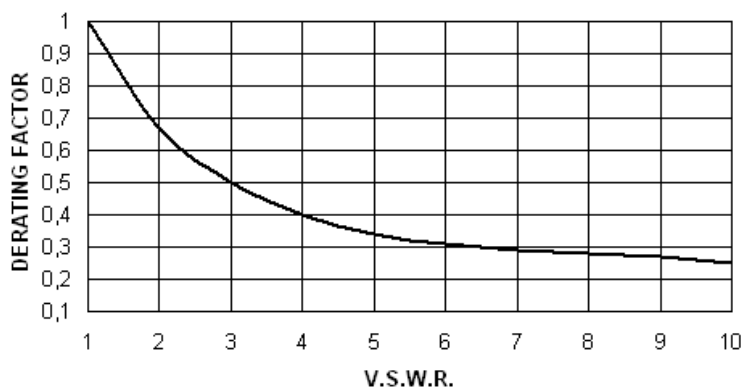


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch, Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA PE71S6333](#)





PE71S6333 CAD Drawing

SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,  
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

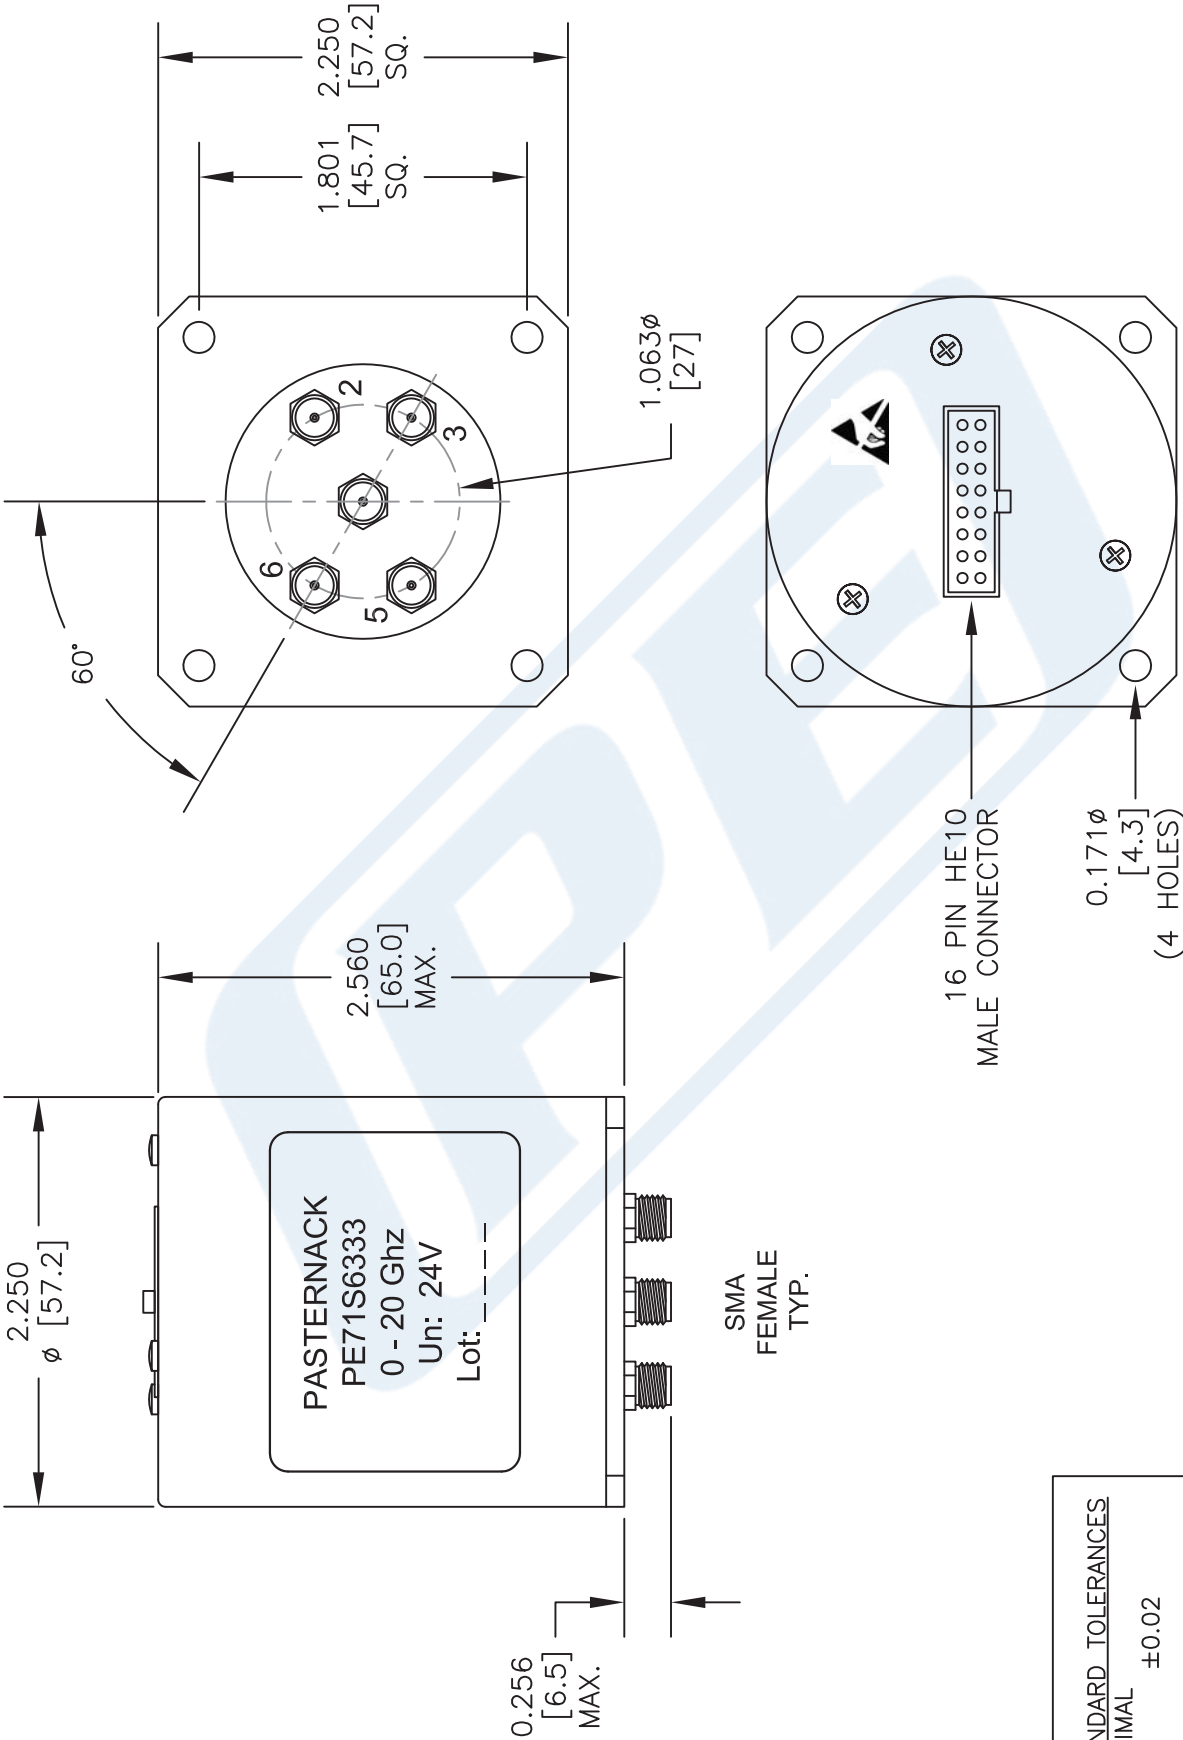

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE71S6333**

CAGE CODE 53919

CAD FILE 031717

SCALE N/A

SIZE A

2233


**PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,  
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,  
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

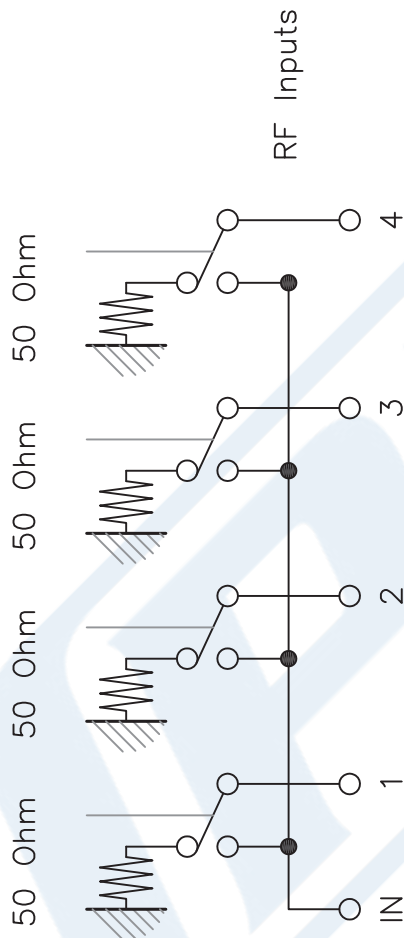

# SINGLE POLE 4 THROW TERMINATED

STANDARD TOLERANCES  
DECIMAL ±0.02

**\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES**

**PE** **PASTERNAK®**  
THE ENGINEER'S RF SOURCE

**Pasternack Enterprises, Inc.**  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

**DWG TITLE**

PE71S6333

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).

CAGE CODE 53919

CAD FILE 031717

SCALE N/A


**SIZE A**

2233



PE71S6333 CAD Drawing

SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,  
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

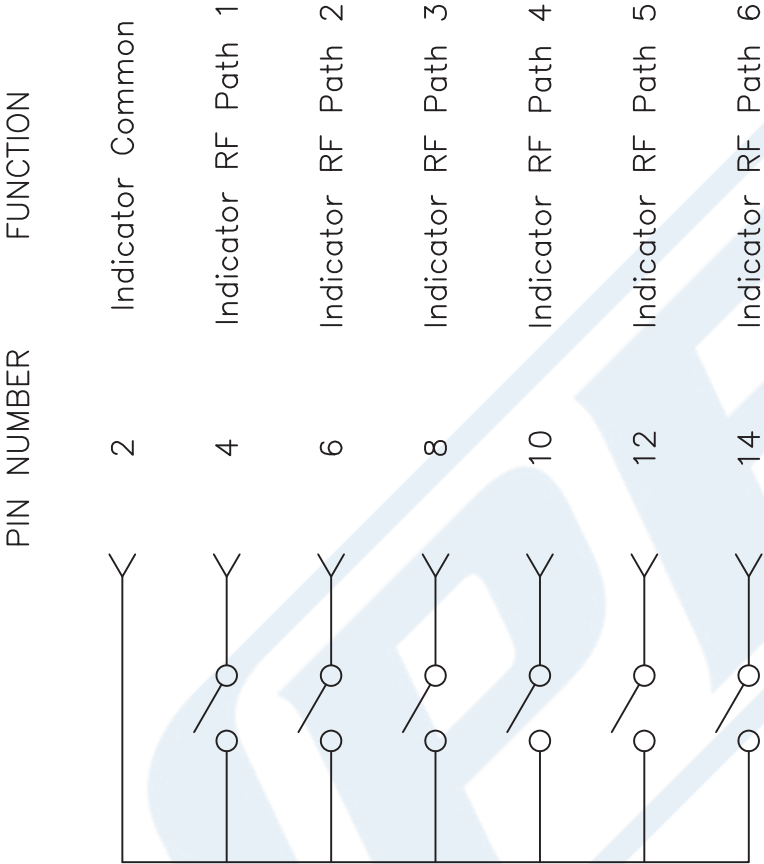

ELECTRONIC POSITION INDICATORS

Ways 1 and 4 are not connected

The electronic position indicators use photo-MOS transistors which are driven by the mechanical position of the RF paths moving elements. The circuitry consists of a common which can be connected to an output corresponding to selected RF path. If one or several RF paths are closed, the corresponding indicators are connected to the common. The photo-MOS transistors are configured for AC and/or DC operation. The electronic position indicators require the supply (20 to 32 VDC) to be connected to pin 1 and ground connected to pin 15.


STANDARD TOLERANCES  
DECIMAL  
±0.02

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

<div><div><div>PASTERNAK®</div><div>THE ENGINEER'S RF SOURCE</div></div></div> <div><div>Pasternack Enterprises, Inc.</div><div>P.O. Box 16759   Irvine   CA   92623</div><div><div>Phone: (949) 261-1920   Fax: (949) 261-7451</div><div>Website: <a href="http://www.pasternack.com">www.pasternack.com</a>   E-Mail: <a href="mailto:sales@pasternack.com">sales@pasternack.com</a></div></div></div>		DWG TITLE		CAGE CODE 53919		CAD FILE 031717		SCALE N/A	SIZE A	2233
		PE71S6333		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						

PE71S6333 CAD Drawing

SP4T 0.03 dB Low Insertion Loss Repeatability Relay Latching Switch,  
Terminated, DC to 20 GHz, 70W, 24V, Indicators, Self Cut Off, SMA

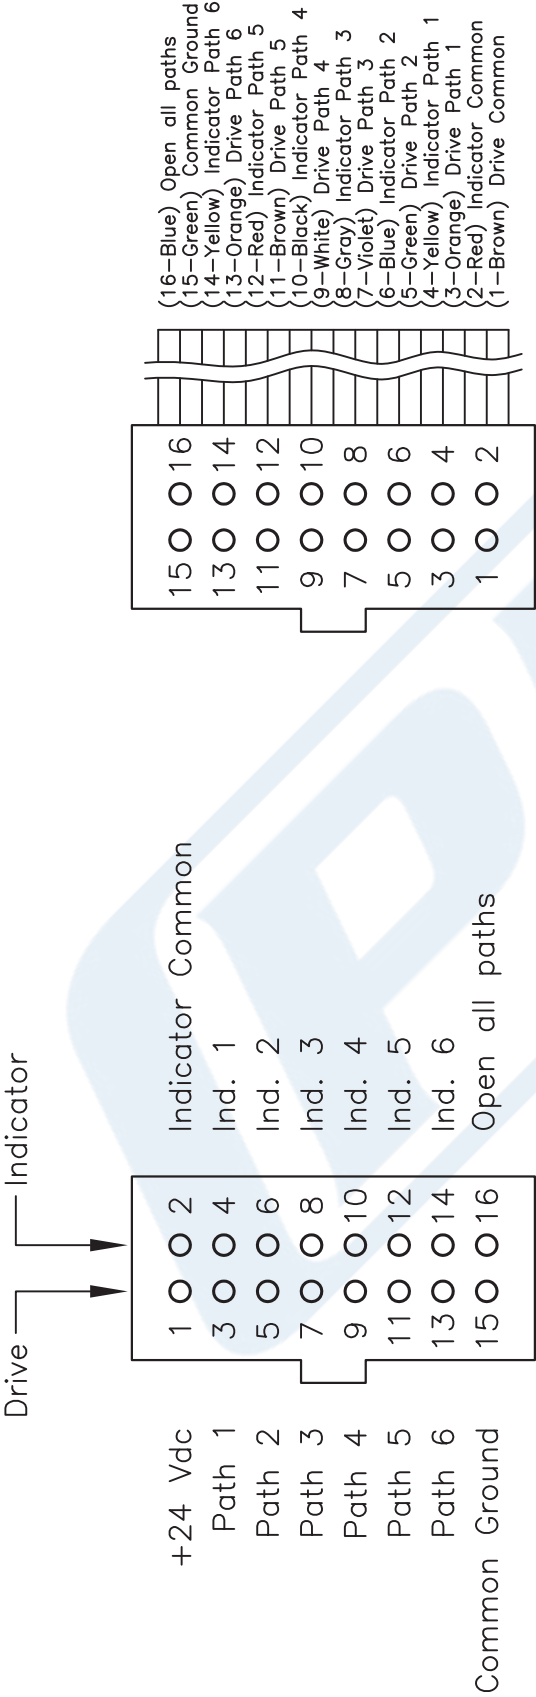

Mating Cable Connector  
Ways 1 and 4 are not connected

STANDARD TOLERANCES
DECIMAL ±0.02

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

- Standard drive**
- Connect pin 15 to ground.
  - Connect pin 1 to supply (+20 VDC to +32 VDC)
  - Select (close) desired RF path by applying Ground to the corresponding "drive" pin (Ex: apply Ground to pin 3 to close RF path 1).
  - To select another path, ensure that all unwanted RF path "drive" pins are disconnected from Ground (to prevent multiple RF path engagement).
  - Apply Ground to the "drive" pin which corresponds to the desired RF path.
  - To open all RF paths, ensure that all RF path "drive" pins are disconnected from Ground. Complete the operation by applying Ground to pin 16.
- Break-Before-Make**  
Open the undesired RF path. After 15 ms (minimum), close the new RF port.
- Make-Before-Break**  
Ensure that the previously selected RF path "drive" is connected to Ground then close the new RF path.

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].



**PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE  
**PE71S6333**

CAGE CODE	53919
CAD FILE	031717
SCALE	N/A
SIZE	A
	2233