

# TECHNICAL DATA SHEET

PE9888-11

Frequency Range	1 to 18 GHz
Polarization	Linear
RF Connector	N Female

Description	Minimum	Typical	Maximum	Units
Frequency Range	1		18	GHz
Nominal Gain		11		dB
Input Power			300	Watts
Input VSWR		1.5		

<b>Size</b>	
Length	9.606 in [243.99 mm]
Width	6.457 in [164.01 mm]
Height	8.031 in [203.99 mm]
Weight	3.2 lbs [1.45 Kg]

RoHS Compliant  
REACH Compliant

12/17/2015

Notes:

- Values at 25 °C, sea level

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623  
**Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451  
[Sales@Pasternack.com](mailto:Sales@Pasternack.com) • [Techsupport@Pasternack.com](mailto:Techsupport@Pasternack.com)

**ISO 9001 : 2008 Registered**







Broadband Gain Horn Antenna Operating From 1 GHz to 18 GHz  
With a Nominal 11 dB Gain With N Female Input Connector

TECHNICAL DATA SHEET

PE9888-11

Typical Performance Data

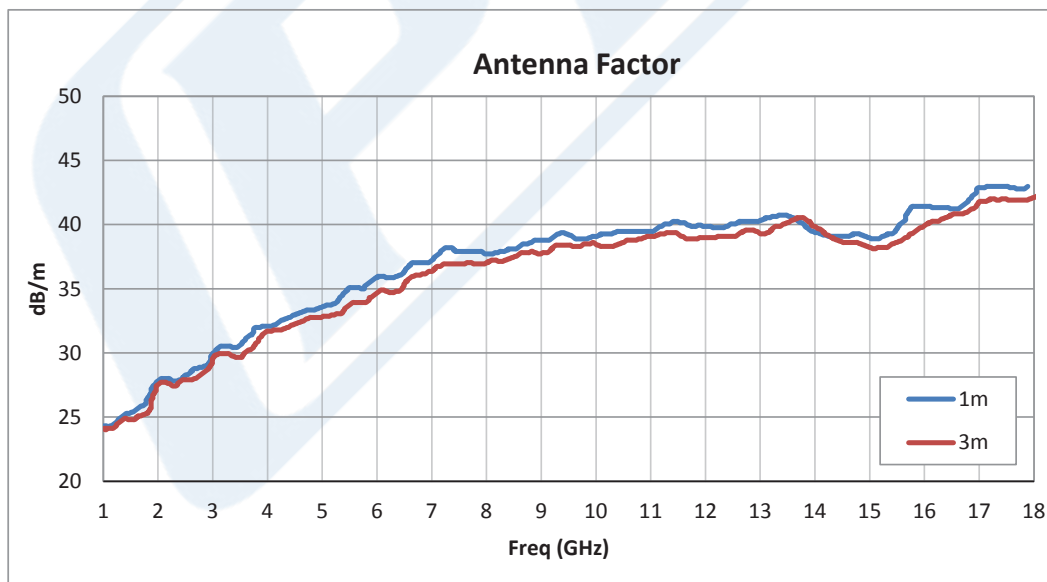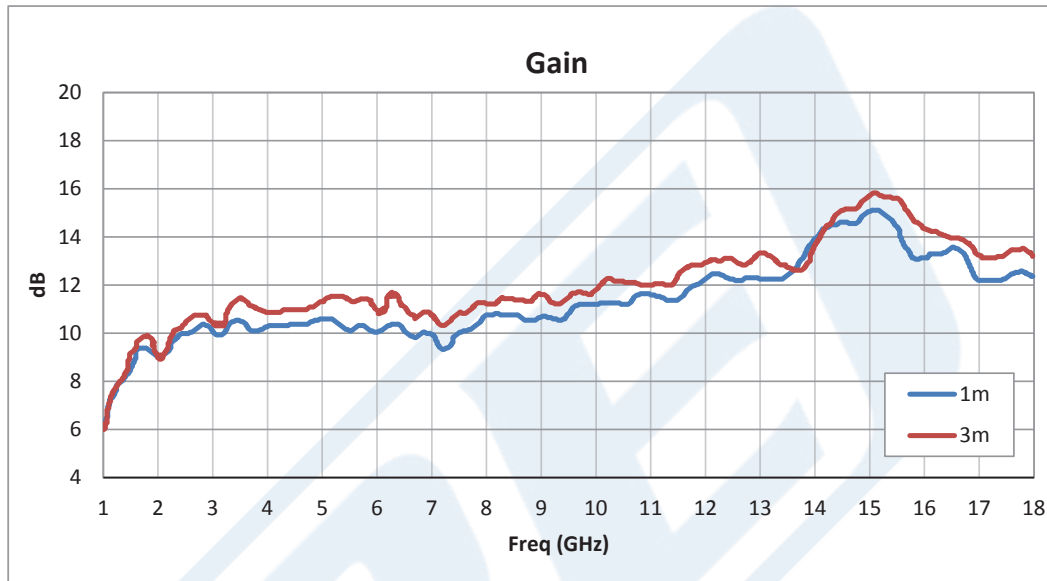

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Broadband Gain Horn Antenna Operating From 1 GHz to 18 GHz With a Nominal 11 dB Gain With N Female Input Connector PE9888-11](#)

# TECHNICAL DATA SHEET

PE9888-11

URL: <http://www.pasternack.com/broadband-gain-horn-antenna-1-18-ghz-11-db-n-pe9888-11-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.