



1 Watt Low Power Commercial Grade WR-42 Waveguide Load 18 GHz to 26.5 GHz

Waveguide Terminations Technical Data Sheet

PEWTR1002

Features

- WR-42
- 18 GHz to 26.5 GHz
- UG-595/U Square Cover Flange
- 1.02:1 Typical VSWR
- 1 Watt Average Power Handling

Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PEWTR1002 is a WR-42 waveguide termination / load that operates in the frequency range of 18 GHz to 26.5 GHz. This WR-42 waveguide termination has a typical VSWR of 1.02:1. These waveguide termination designs are made of painted brass copper and incorporate a standard UG-595/U Square Cover flanges.

Pasternack waveguide terminations / loads are designed so virtually all applied power is absorbed, thus assuring a low VSWR. The power rating on this WR-42 termination is 1 watt, other detailed specifications and a diagram drawing can be found on this datasheet PDF below. Pasternack offers a complete family of waveguide terminations that are in-stock for same day shipment.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	18		26.5	GHz
VSWR		1.02:1		
Return Loss		18		dB
Insertion Loss			26.5	dB
Input Power (CW)			1	Watts

Mechanical Specifications

Weight 0.106 lbs [48.08 g]

Description	Flange	Waveguide
Designation	UG-595/U	WR-42
Type	Square Cover	
Material	Brass	Brass

Environmental Specifications

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt Low Power Commercial Grade WR-42 Waveguide Load 18 GHz to 26.5 GHz PEWTR1002](#)





1 Watt Low Power Commercial Grade WR-42 Waveguide Load 18 GHz to 26.5 GHz

Waveguide Terminations Technical Data Sheet

PEWTR1002

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data



1 Watt Low Power Commercial Grade WR-42 Waveguide Load 18 GHz to 26.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt Low Power Commercial Grade WR-42 Waveguide Load 18 GHz to 26.5 GHz PEWTR1002](#)

URL: <https://www.pasternack.com/1-watts-wr-42-rf-load-18-26.5-ghz-commercial-grade-pewtr1002-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWTR1002 CAD Drawing

1 Watt Low Power Commercial Grade WR-42 Waveguide Load 18 GHz to 26.5 GHz

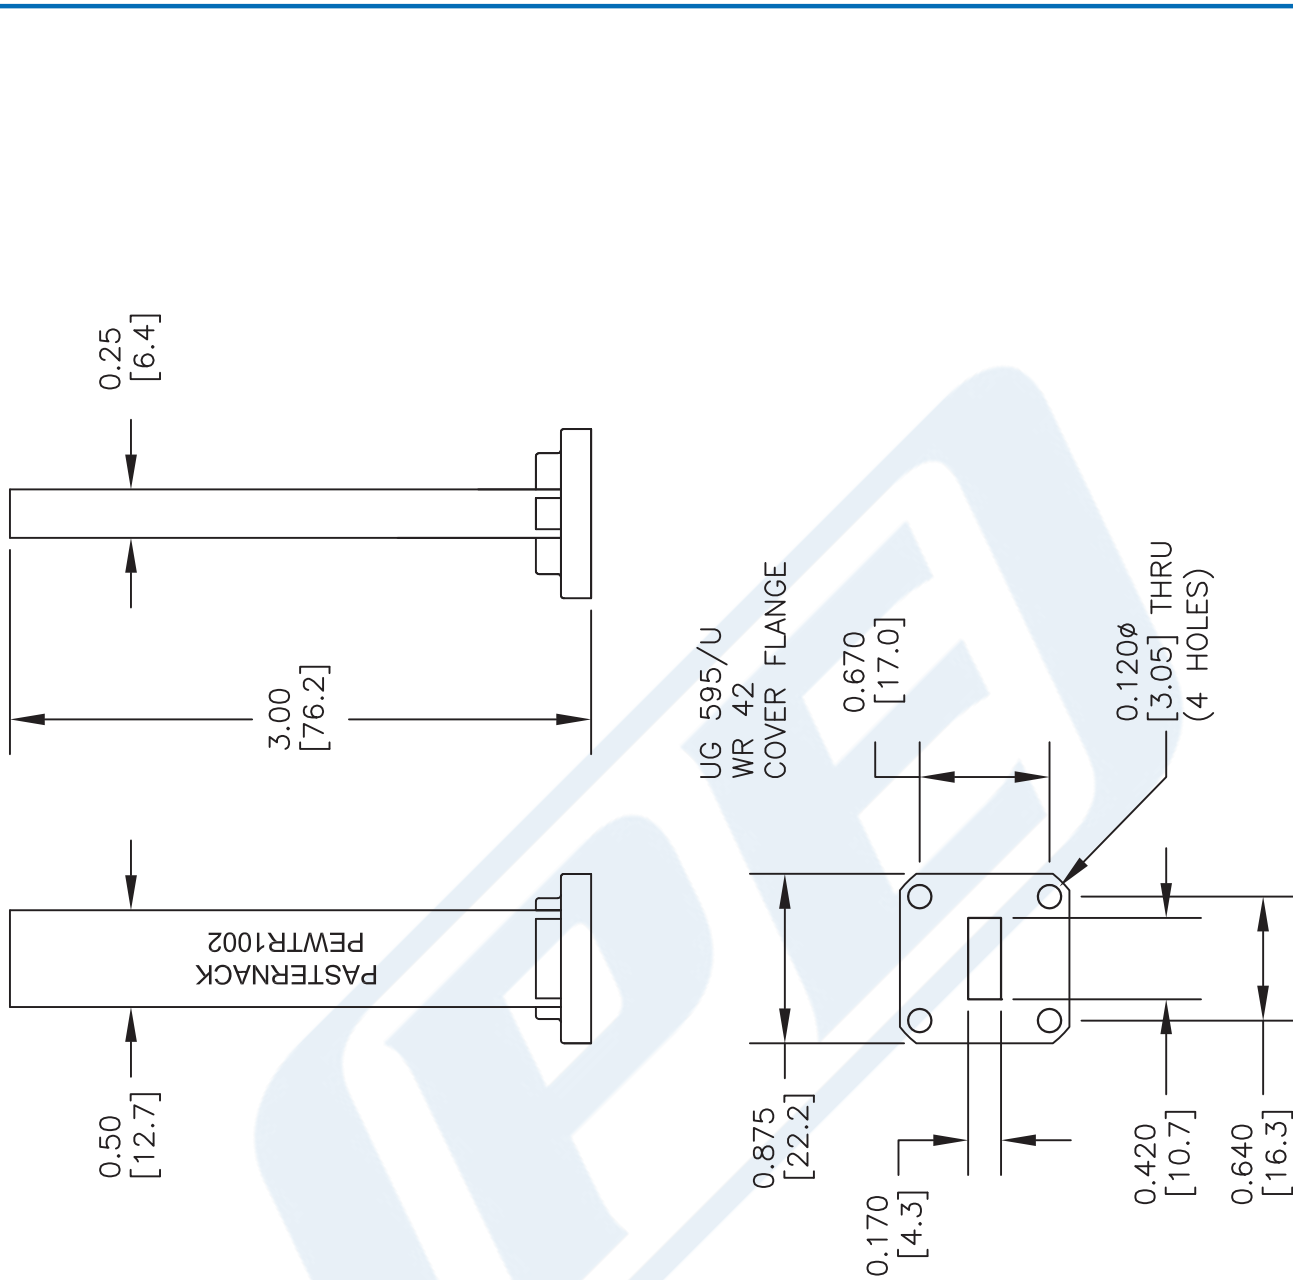

UG 595/U
WR 42
COVER FLANGE

PASTERNAK
PEWTR1002

STANDARD TOLERANCES
 .X ±0.2
 .XX ±0.1
 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PEWTR1002

(PE) PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE	122316	SCALE	N/A	SIZE	A	2233
----------	--------	-------	-----	------	---	------

CAGE CODE 53919