



## SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax

### RF Cable Assemblies Technical Data Sheet

PE33254-36

#### Configuration

- Connector 1: SMA Female
- Connector 2: SMA Female
- Cable Type: RG223

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	12.4	GHz
Insertion Loss (Max.)	0.47	0.6	0.86	1.21		dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

#### Mechanical Specifications

##### Cable Assembly

Length	36 in [914.4 mm]
Diameter	0.25 in [6.35 mm]
Weight	0.13 lbs [58.97 g]

##### Cable

Cable Type	RG223
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax PE33254-36](#)



SMA Female to SMA Female Cable 36 Inch  
Length Using RG223 Coax

RF Cable Assemblies Technical Data Sheet

PE33254-36

Shield Layer 2 Silver Plated Copper Braid  
Jacket Material PVC, Black  
Jacket Diameter 0.21 in [5.33 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Female	SMA Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	50µ in. minimum.	50µ in. minimum.
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum.	100µ in. minimum.

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

For RoHS Compliant version, use PE33254LF-36. Contact Pasternack if product cannot be found.  
REACH Compliant 12/19/2011

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax PE33254-36](#)



## SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax

### RF Cable Assemblies Technical Data Sheet

PE33254-36

#### How to Order

Part Number Configuration:

PE33254

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE33254-12 = 12 inches long cable  
PE33254-100cm = 100 cm long cable

SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax PE33254-36](http://www.pasternack.com/sma-female-sma-female-rg223u-cable-assembly-pe33254-36-p.aspx)

URL: <http://www.pasternack.com/sma-female-sma-female-rg223u-cable-assembly-pe33254-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE33254-36 CAD Drawing

SMA Female to SMA Female Cable 36 Inch Length Using RG223 Coax

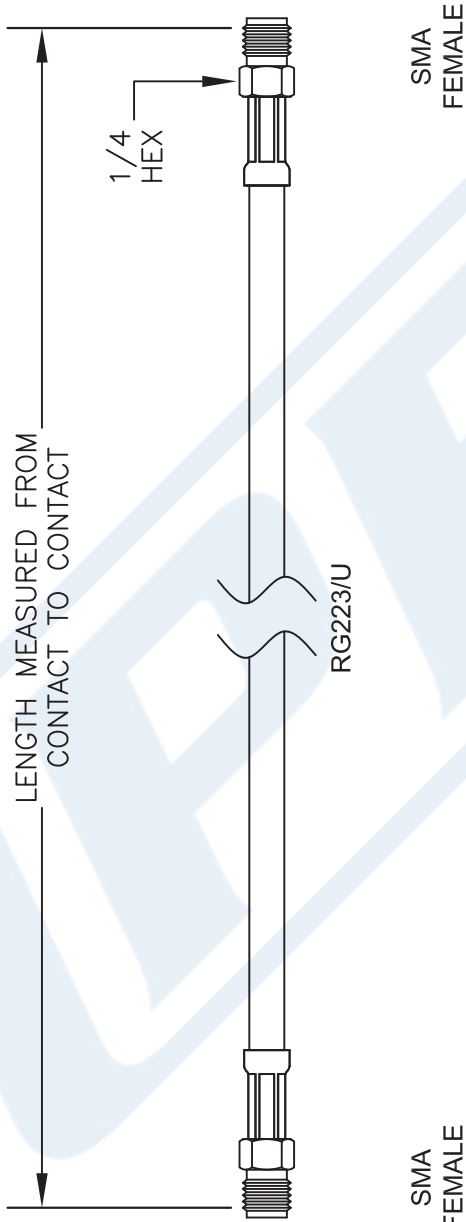

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - 3. DIMENSIONS ARE IN INCHES [mm].
  - 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE

PE33254

FSCM NO. 53919

CAD FILE 120115

SCALE N/A

SIZE A

2233

PE

PASTERNAK®

THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)