



N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS

TECHNICAL DATA SHEET PE337-72

The PE330 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The reduced 0.49 inch diameter SMA body allows for attachment to closely spaced connection points found on multiport components and interface panels. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy Duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All PE330 cable assemblies are 100% Continuity, Hi-POT, and RF tested to published specifications. Custom lengths are built to order and shipped same day.

- SMA Body diameter of 0.49 inches
- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR is < 1.35:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125 °C
- ROHS and REACH Compliant
- Same day shipment of custom lengths
- 100% Continuity, Hi-Pot, and RF tested

**Configuration**

Connector 1	N Male
Connector 2	SMA Male
Cable Type	PE-P300LL

**Electrical Specifications**

Frequency Range	DC to 18 GHz
Impedance	50 Ohms
Maximum VSWR	1.35:1
Velocity of Propagation	83 %
RF Shielding	95 dB

**Typical Performance by Frequency**

**Frequency 1**

Frequency	400 MHz
Insertion Loss	0.2 dB
Power Handling, KWatts	2.9

**Frequency 2**

Frequency	1000 MHz
Insertion Loss	0.3 dB
Power Handling	1.8 KWatts

**Frequency 3**

Frequency	2 GHz
Insertion Loss	0.42 dB
Power Handling	1.2 KWatts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS PE337-72](#)



N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS

TECHNICAL DATA SHEET PE337-72

**Frequency 4**

Frequency	3 GHz
Insertion Loss	0.48 dB
Power Handling	1.05 KWatts

**Frequency 5**

Frequency	5 GHz
Insertion Loss	0.66 dB
Power Handling	850 Watts

**Frequency 6**

Frequency	10 GHz
Insertion Loss	1.28 dB
Power Handling	600 Watts

**Frequency 7**

Frequency	18 GHz
Insertion Loss	1.32 dB
Power Handling	400 Watts

Electrical Specification Notes:

Power handling values are calculated based on Cable properties. Power handling will vary based on the actual VSWR of the cable assembly.

**Mechanical Specifications**

**Temperature**

Temperature Operating Range	-55 to +125 deg C
-----------------------------	-------------------

**Size**

Length	72 in [182.88 cm]
Diameter	0.75 in [19.05 mm]
Weight	0.1 lbs [45.36 g]
Cable Color	Green
Repeated Minimum Bend Radius	1.5 in [38.1 mm]

**Cable**

Cable Type	PE-P300LL
Cable Inner Conductor	Copper, Silver
No of Shields	2
Cable Outer Conductor	Copper, Silver
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter	0.3 in [7.62 mm]

**Connector 1**

Type	N Male
------	--------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS PE337-72](#)



N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS

TECHNICAL DATA SHEET PE337-72

Configuration	Straight
Inner Conductor Material and Plating	Beryllium Copper, Gold
Inner Conductor Plating Specification	ASTM-B488 50µ In.
Outer Conductor Material and Plating	Passivated Stainless Steel
Outer Conductor Plating Specification	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700
Hex Size	3/4 Inch
Torque	14 in-lbs [1.58 Nm]
Body Material and Plating	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700
Dielectric Type	PTFE

**Connector 2**

Type	SMA Male
Connector 2 Specification	MIL-STD-348, Figure 310-1.
Configuration	Straight
Inner Conductor Material and Plating	Beryllium Copper, Gold
Inner Conductor Plating Specification	ASTM-B488 50µ In.
Outer Conductor Material and Plating	Passivated Stainless Steel
Outer Conductor Plating Specification	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700
Hex Size	5/16 Inch
Torque	8 in-lbs [0.9 Nm]
Body Material and Plating	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700
Dielectric Type	PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS PE337-72](#)



N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS

TECHNICAL DATA SHEET

PE337-72

**Plotted and Other Data**

Notes:

- Values at +25 °C, sea level

N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male with Reduced Diameter SMA Body Low Loss Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS PE337-72](#)

URL: <http://www.pasternack.com/n-male-sma-male-pe-p300ll-cable-assembly-pe337-72-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE337-72 CAD Drawing

N Male to SMA Male with Reduced Diameter SMA Body Low Loss  
Test Cable 72 Inch Length Using PE-P300LL Coax, RoHS

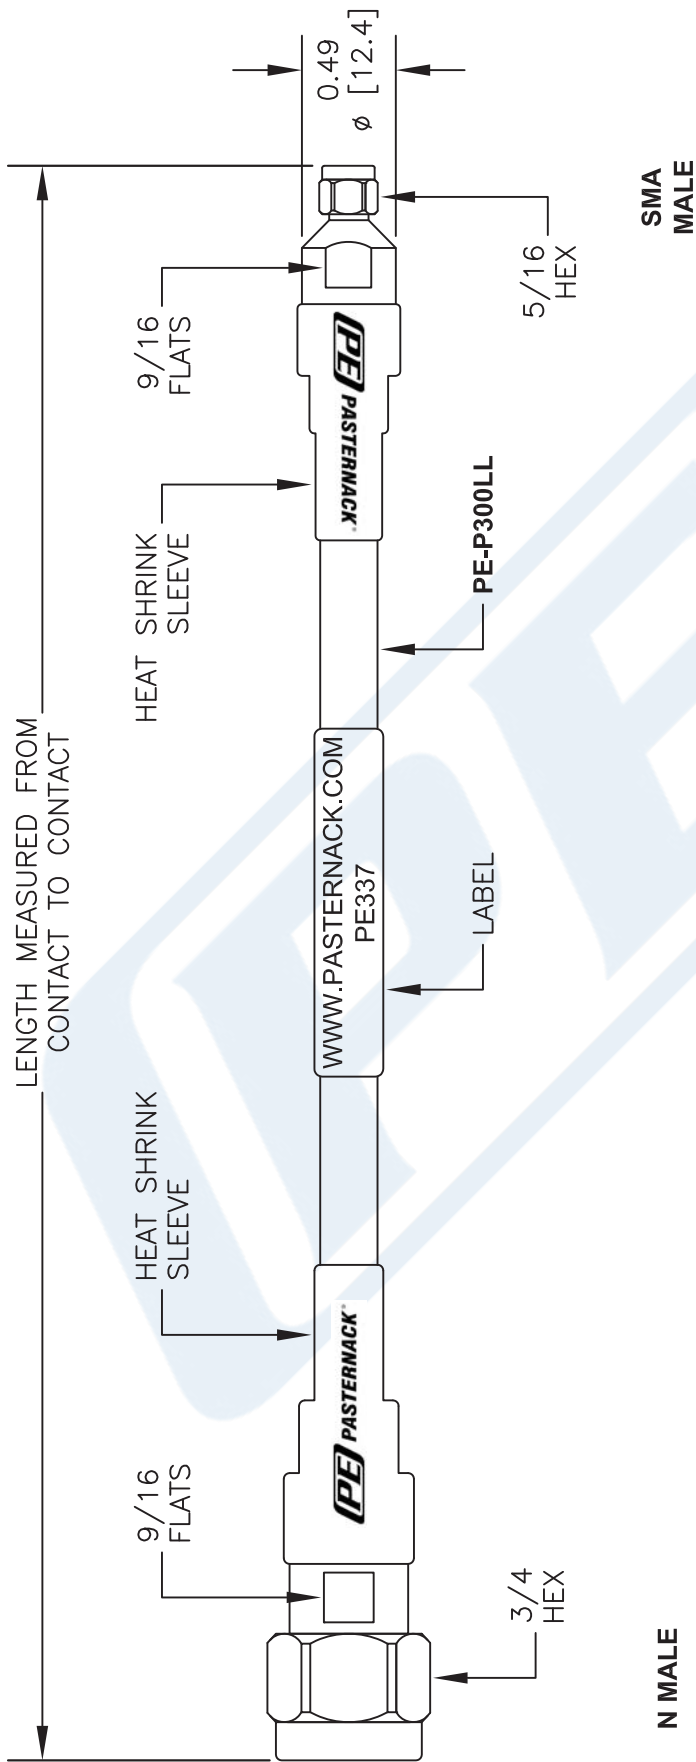

**NOTE:**  
LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. 48" OR LONGER WILL BE 12" AWAY FROM CONNECTOR.

Part Number Configuration		How To Order	
PE3	[ZZZ] - [XX] [UU]	Part # Ext.	Length In Inches
00 - 99999	< Blank > = Inches _____ Length	-12	12"
	CM = Centimeters	-24	24"
		-36	36"
		-48	48"
		-60	60"
		-xx	Custom Length
		Part # Ext.	Length In Centimeters
		-25CM	25Cm
		-50CM	50Cm
		-75CM	75Cm
		-100CM	100Cm
		-125CM	125Cm
		-xxCM	Custom Length

**NOTES:**  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).  
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE337**

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919	CAD FILE 070914	SCALE N/A	SIZE A	2233
----------------	-----------------	-----------	--------	------