



SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch Length Using PE-SR401AL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE34215LF-12

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: PE-SR401AL-STRAIGHT

Features

- Max Frequency 8 GHz
- 69.5% Phase Velocity

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34215LF-12 SMA male right angle to SMA male right angle 12 inch cable using PE-SR401AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm semi-rigid PE-SR401AL-STRAIGHT coax. The PE34215LF-12 SMA male to SMA male cable assembly operates to 8 GHz. The right angle SMA interfaces on the PE-SR401AL-STRAIGHT cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
Velocity of Propagation		69.5		%
Capacitance		29.6 [97.11]		pF/ft [pF/m]
Dielectric Withstanding Voltage (AC)			7,500	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.4	1	5	8		GHz
Insertion Loss (Typ.)	0.44	0.48	0.62	0.69		dB
Power Handling (Max.)	962	661	265	200		W

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch Length Using PE-SR401AL Coax , LF Solder PE34215LF-12](#)



SMA Male Right Angle to SMA Male Right Angle Cable
12 Inch Length Using PE-SR401AL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE34215LF-12

Mechanical Specifications

Cable Assembly

Length*	12 in [304.8 mm]
Diameter	0.378 in [9.6 mm]
Weight	0.107 lbs [48.53 g]

Cable

Cable Type	PE-SR401AL-STRAIGHT
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Aluminum
Jacket Diameter	0.25 in [6.35 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Material and Plating	Brass, Gold	Brass, Gold
Hex Size	5/16 in	5/16 in
Torque	5 in-lbs [0.57 Nm]	5 in-lbs [0.57 Nm]

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Cable assemblies that are 60 inches or less use straight coax, greater than 60 inches use coiled coax

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch Length Using PE-SR401AL Coax , LF Solder PE34215LF-12](#)



SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch Length Using PE-SR401AL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE34215LF-12

How to Order

Part Number Configuration:

PE34215LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34215LF-12 = 12 inches long cable
PE34215LF-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch Length Using PE-SR401AL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch Length Using PE-SR401AL Coax , LF Solder PE34215LF-12](https://www.pasternack.com/sma-male-sma-male-pe-sr401al-cable-assembly-pe34215lf-12-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-male-pe-sr401al-cable-assembly-pe34215lf-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34215LF-12 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Cable 12 Inch
Length Using PE-SR401AL Coax , LF Solder

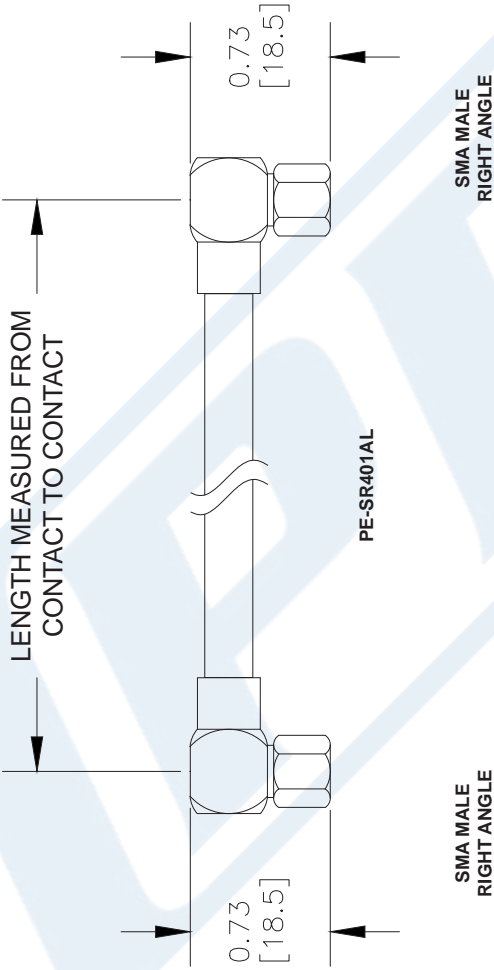

How To Order					
<div>Part Number Configuration</div> <div>PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div></div> <div>00 - 99999</div> <div>LF = RoHS Compliant < Blank > = Standard</div> <div>Note: LF applies only to RF cables</div>		<div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div>			
		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
		-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-xx	Custom Length	-xxCM	Custom Length

**PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE

PE34215LF

FSCM NO. 53919

CAD FILE 41613

SCALE N/A

SIZE A