




SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34235LF-12

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Female
- Cable Type: PE-SR402AL

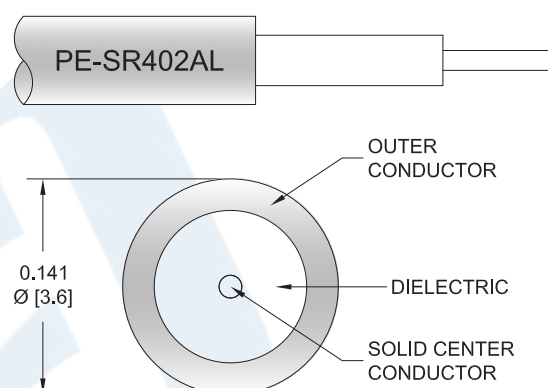

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

Mechanical Specifications

Cable Assembly

Length	12 in [304.8 mm]
Diameter	0.315 in [8 mm]
Weight	0.031 lbs [14.06 g]

Cable

Cable Type	PE-SR402AL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS PE34235LF-12](#)



SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34235LF-12

Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Aluminum
Jacket Diameter	0.141 in [3.58 mm]
One Time Minimum Bend Radius	0.1 in [2.54 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50µ in. minimum	MIL-G-45204
Dielectric Type	Teflon	Teflon
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	10µ in. minimum	MIL-G-45204

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS PE34235LF-12](#)



SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34235LF-12

How to Order

Part Number Configuration:

PE34235LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34235LF-12 = 12 inches long cable
PE34235LF-100cm = 100 cm long cable

SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS PE34235LF-12](http://www.pasternack.com/sma-male-sma-female-pe-sr402al-cable-assembly-pe34235lf-12-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-female-pe-sr402al-cable-assembly-pe34235lf-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34235LF-12 CAD Drawing

SMA Male to SMA Female Cable 12 Inch Length Using PE-SR402AL Coax, RoHS

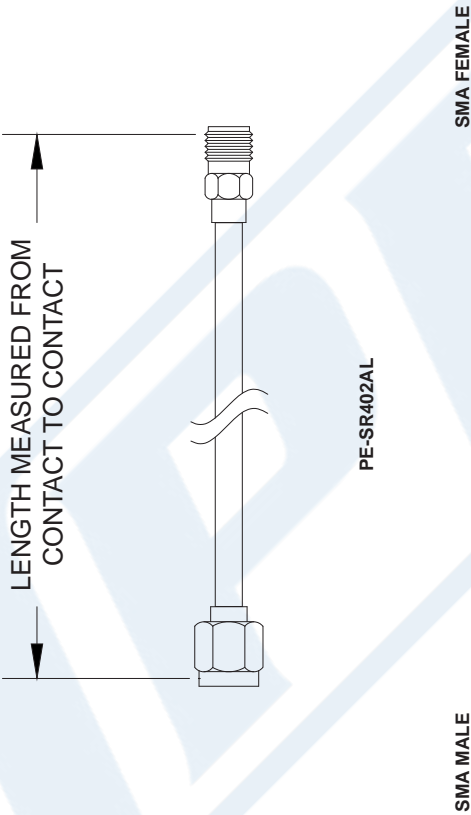

How To Order			Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration PE3 [zzz] [yy] [xx] [uu] 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables	Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM		-12 -24 -36 -48 -60 -xx	12" 24" 36" 48" 60" Custom Length	-25CM -50CM -75CM -100CM -125CM -xxCM	25Cm 50Cm 75Cm 100Cm 125Cm Custom Length

**PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - 3. DIMENSIONS ARE IN INCHES [mm].
 - 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE

PE34235LF

FSCM NO. 53919

CAD FILE 41613

SCALE N/A

SIZE A