




## SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax

### RF Cable Assemblies Technical Data Sheet

PE3443-24

#### Configuration

- Connector 1: SMA Male
- Connector 2: SMA Female
- Cable Type: PE-SR402FL

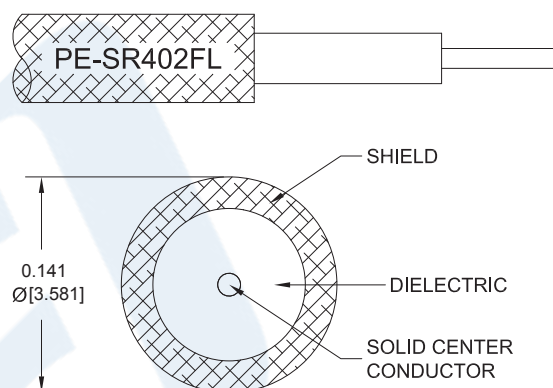

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	
Return Loss			15.56	dB
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Typ.)	0.438	0.518	0.72	0.986	1.392	dB

#### Mechanical Specifications

##### Cable Assembly

Length*	24 in [609.6 mm]
Diameter	0.315 in [8 mm]
Weight	0.066 lbs [29.94 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax PE3443-24](#)



## SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax

### RF Cable Assemblies Technical Data Sheet

PE3443-24

#### Cable

Cable Type	PE-SR402FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.57 in [39.88 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Female
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50μ in. minimum	MIL-G-45204
Dielectric Type	Teflon	Teflon
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	10μ in. minimum	MIL-G-45204
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100μ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax PE3443-24](#)



## SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax

### RF Cable Assemblies Technical Data Sheet

PE3443-24

#### How to Order

Part Number Configuration:

PE3443

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3443-12 = 12 inches long cable  
PE3443-100cm = 100 cm long cable

SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax PE3443-24](https://www.pasternack.com/sma-male-sma-female-pe-sr402fl-cable-assembly-pe3443-24-p.aspx)


URL: <https://www.pasternack.com/sma-male-sma-female-pe-sr402fl-cable-assembly-pe3443-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3443-24 CAD Drawing

SMA Male to SMA Female Cable 24 Inch Length Using PE-SR402FL Coax

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in Inches

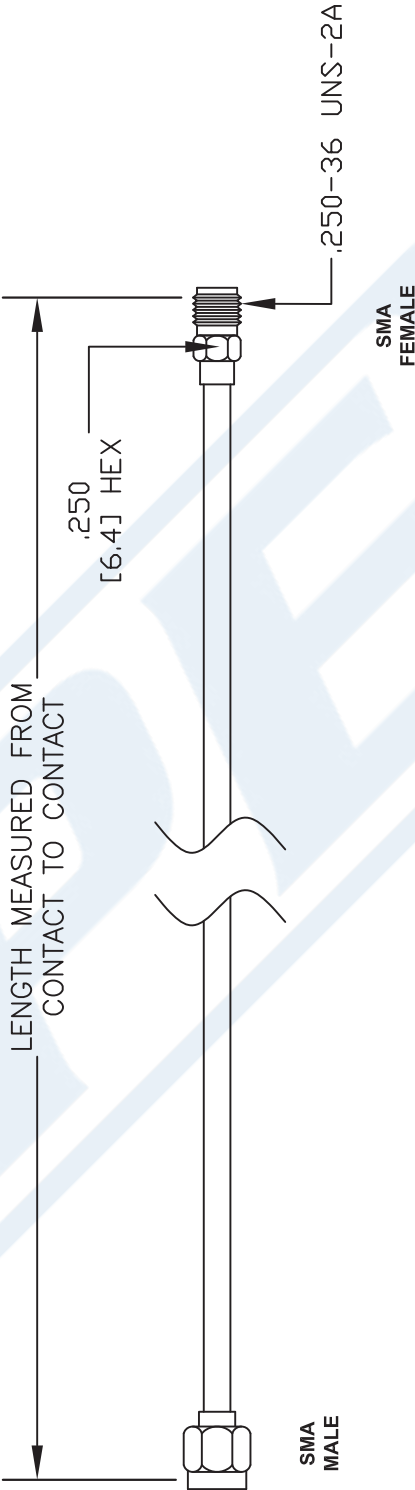

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  - 3. DIMENSIONS ARE IN INCHES [mm].
  - 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE

PE3443-XX

REV. A

FSCM NO. 53919

CAD FILE 021308

SCALE N/A

SIZE A

127



PASTERNAK®

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

© 2017 Pasternack Enterprises All Rights Reserved

PE3443-24 REV

4