



N Male to N Male Cable 24 Inch Length Using RG142 Coax

TECHNICAL DATA SHEET

PE3455-24

Configuration

Connector 1	N Male
Connector 2	N Male
Cable Type	RG142

Electrical Specifications

Frequency Range	DC to 6 GHz
Impedance	50 Ohms
Max VSWR	1.5:1
Velocity of Propagation	69.2 %
RF Shielding	90 dB

Performance by Frequency

Frequency 1

Frequency	100 MHz
Insertion Loss	0.039 dB

Frequency 2

Frequency	1000 MHz
Insertion Loss	0.13 dB

Frequency 3

Frequency	3 GHz
Insertion Loss	0.23 dB

Frequency 4

Frequency	5 GHz
Insertion Loss	0.36 dB

Mechanical Specifications

Temperature

Temperature Operating Range	-55 to +165 deg C
-----------------------------	-------------------

Size

Length	24 in [609.6 mm]
Diameter	0.812 in [20.62 mm]
Weight	0.182 lbs [82.55 g]
Cable Color	Tan
One Time Minimum Bend Radius	0.984 in [24.99 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]

Cable

Cable Type	RG142
Inner Conductor Type	Solid
Cable Inner Conductor	Copper Clad Steel, Silver
No of Shields	2

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 24 Inch Length Using RG142 Coax PE3455-24](#)



N Male to N Male Cable 24 Inch Length Using RG142 Coax

TECHNICAL DATA SHEET

PE3455-24

Dielectric Type
Jacket Material
Jacket Diameter

PTFE
FEP
0.195 in [4.95 mm]

Connector 1

Type
Connector 1 Specification
Configuration
Inner Conductor Material and Plating
Body Material and Plating
Dielectric Type

N Male
MIL-STD-348
Straight
Brass, Silver
Brass, Nickel
Teflon

Connector 2

Type
Connector 2 Specification
Configuration
Inner Conductor Material and Plating
Body Material and Plating
Dielectric Type

N Male
MIL-STD-348
Straight
Brass, Silver
Brass, Nickel
Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

For RoHS Compliant version, use PE3455LF-24. Contact Pasternack if product cannot be found.
REACH Compliant 06/18/2012

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 24 Inch Length Using RG142 Coax PE3455-24](#)



N Male to N Male Cable 24 Inch Length Using RG142 Coax

TECHNICAL DATA SHEET

PE3455-24

How to Order

Part Number Configuration:

PE3455

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3455-12 = 12 inches long cable
PE3455-100cm = 100 cm long cable

N Male to N Male Cable 24 Inch Length Using RG142 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 24 Inch Length Using RG142 Coax PE3455-24](#)


URL: <http://www.pasternack.com/n-male-n-male-rg142bu-cable-assembly-pe3455-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3455-24 CAD Drawing

N Male to N Male Cable 24 Inch Length Using RG142 Coax

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in Inches

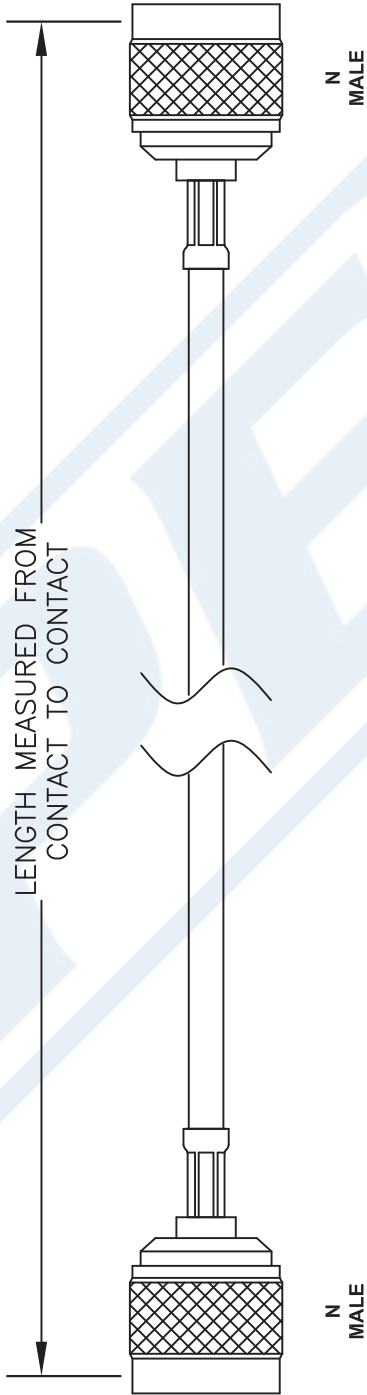

 **PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE	
PE3455-XX	
REV. A	FSCM NO. 53919

NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.			
CAD FILE	021208	SCALE	N/A
SIZE	A		127