



Reverse Polarity SMA Male to Reverse Polarity
SMA Male Cable Using RG142 Coax

RF Cable Assemblies Technical Data Sheet

PE34750

Configuration

- Connector 1: SMA Male Reverse Polarity
- Connector 2: SMA Male Reverse Polarity
- Cable Type: RG142

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69.2		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	1	3	5		GHz
Insertion Loss (Typ.)						dB/m
	0.04	0.13	0.24	0.36		dB/ft
	0.13	0.43	0.79	1.18		dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Diameter 0.312 in [7.92 mm]

Weight 0.026 lbs [11.79 g]

Cable

Cable Type RG142

Impedance 50 Ohms

Inner Conductor Type Solid

Inner Conductor Material and Plating Copper Clad Steel, Silver

Dielectric Type PTFE

Number of Shields 2

Shield Layer 1 Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax PE34750](#)



Reverse Polarity SMA Male to Reverse Polarity
SMA Male Cable Using RG142 Coax

RF Cable Assemblies Technical Data Sheet

PE34750

Shield Layer 2
Jacket Material Silver Plated Copper Braid
Jacket Diameter FEP, Tan
0.195 in [4.95 mm]

One Time Minimum Bend Radius 0.984 in [24.99 mm]
Repeated Minimum Bend Radius 2 in [50.8 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Reverse Polarity	SMA Male Reverse Polarity
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	QQ-N-290
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	QQ-N-290	QQ-N-290
Hex Size	5/16 inch	5/16 in.
Torque	5 in-lbs [0.57 Nm]	5 in-lbs [0.57 Nm]

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax PE34750](#)



Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax

RF Cable Assemblies Technical Data Sheet

PE34750

How to Order

Part Number Configuration:

PE34750

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34750-12 = 12 inches long cable
PE34750-100cm = 100 cm long cable

Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax PE34750](#)

URL: <https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe34750-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34750 CAD Drawing

Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable Using RG142 Coax

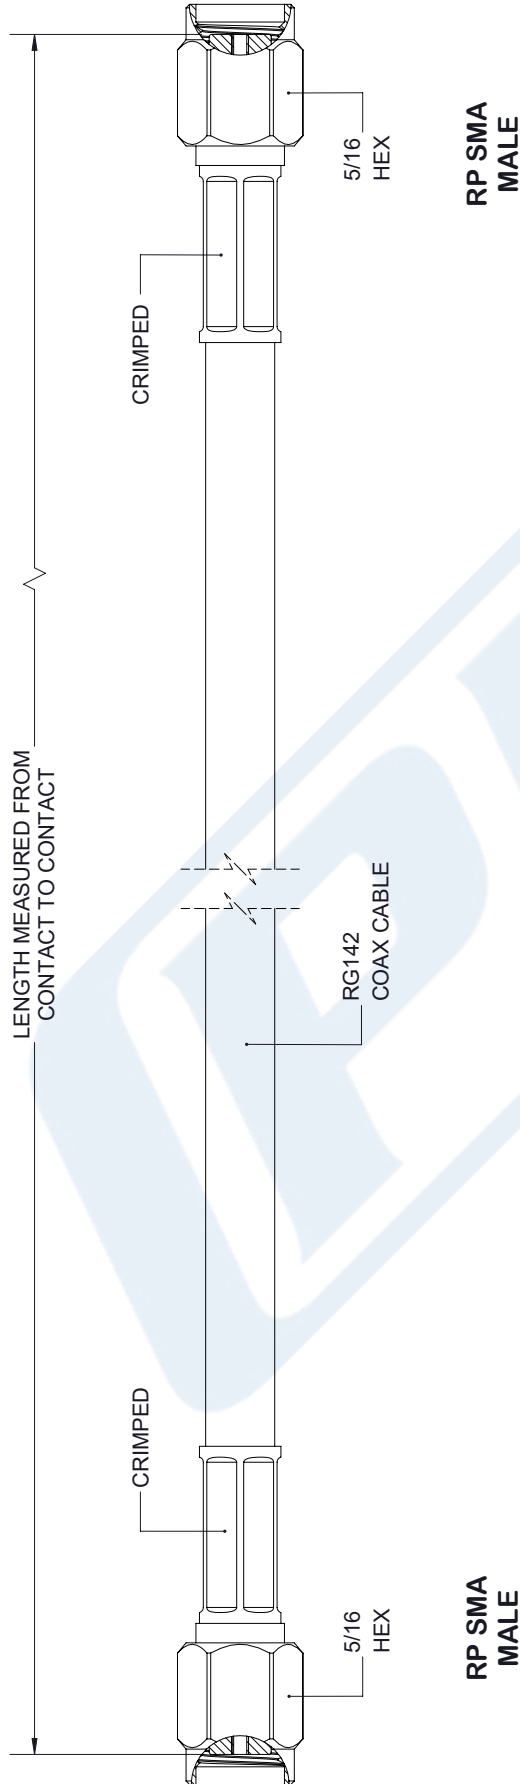

STANDARD TOLERANCES

.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE34750

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
3. DIMENSIONS ARE IN INCHES [mm].