



Reverse Polarity SMA Male to Reverse Polarity SMA Male
Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE34750LF-60

Configuration

- Connector 1: SMA Male Reverse Polarity
- Connector 2: SMA Male Reverse Polarity
- Cable Type: RG142

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
RF Shielding	90			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	1	3	5		GHz
Insertion Loss (Typ.)	0.4	0.85	1.39	2		dB

Mechanical Specifications

Cable Assembly

Length*	60 in [152.4 cm]
Diameter	0.312 in [7.92 mm]

Cable

Cable Type	RG142
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.195 in [4.95 mm]

One Time Minimum Bend Radius	0.984 in [24.99 mm]
------------------------------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS PE34750LF-60](#)



Reverse Polarity SMA Male to Reverse Polarity SMA Male
Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE34750LF-60

Repeated Minimum Bend Radius

1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Reverse Polarity	SMA Male Reverse Polarity
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	QQ-N-290	QQ-N-290
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	QQ-N-290	QQ-N-290
Hex Size	5/16 inch	5/16 inch
Torque	5 in-lbs [0.57 Nm]	5 in-lbs [0.57 Nm]

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS PE34750LF-60](#)



Reverse Polarity SMA Male to Reverse Polarity SMA Male
Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE34750LF-60

How to Order

Part Number Configuration:

PE34750LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34750LF-12 = 12 inches long cable
PE34750LF-100cm = 100 cm long cable

Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable 60 Inch Length Using RG142 Coax, LF Solder, RoHS PE34750LF-60](https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe34750lf-60-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe34750lf-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34750LF-60 CAD Drawing

Reverse Polarity SMA Male to Reverse Polarity SMA Male Cable
60 Inch Length Using RG142 Coax, LF Solder, RoHS

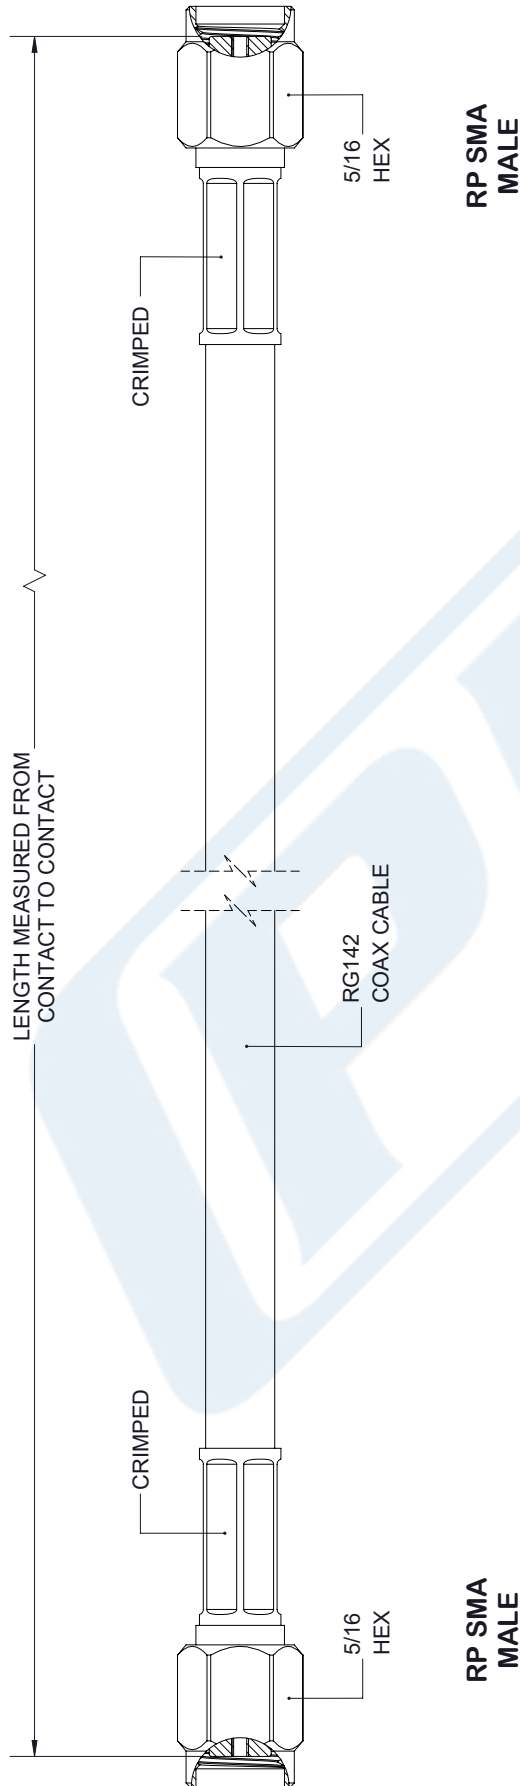

STANDARD TOLERANCES

.X ±0.2
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE34750LF

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 110117

SCALE N/A

SIZE A

7361