



SMA Male to SMA Male Right Angle Precision Cable
30 Inch Length Using 150 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35418-30

SMA Male to SMA Male Right Angle Precision Cable 30 Inch Length Using 150 Series Coax, RoHS

Configuration

Connector 1	SMA Male
Connector 2	SMA Male Right Angle
Cable Type	150 Series

Electrical Specifications

Frequency Range, GHz	DC to 26.5
Impedance, Ohms	50
Maximum VSWR	1.4:1
Velocity of Propagation, %	69.5
RF Shielding, dB	90
Maximum Operating Voltage, Vrms	1,900

Typical Electrical Specifications

Frequency 1

Frequency, GHz	2
VSWR	1.07:1
Insertion Loss	0.2 dB/ft [0.66 dB/m]

Frequency 2

Frequency, GHz	6
VSWR	1.14:1
Insertion Loss	0.3 dB/ft [0.98 dB/m]

Frequency 3

Frequency, GHz	10
VSWR	1.25:1
Insertion Loss	0.41 dB/ft [1.35 dB/m]

Frequency 4

Frequency, GHz	14
VSWR	1.32:1
Insertion Loss	0.52 dB/ft [1.71 dB/m]

Frequency 5

Frequency, GHz	18
VSWR	1.32:1
Insertion Loss	0.64 dB/ft [2.1 dB/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Precision Cable 30 Inch Length Using 150 Series Coax, RoHS PE35418-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Male to SMA Male Right Angle Precision Cable 30 Inch Length Using 150 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35418-30

Frequency 6

Frequency, GHz	22
VSWR	1.35:1
Insertion Loss	0.75 dB/ft [2.46 dB/m]

Frequency 7

Frequency, GHz	26.5
VSWR	1.4:1
Insertion Loss	0.78 dB/ft [2.56 dB/m]

Electrical Specification Notes:

Short lengths up to 24" long may exhibit VSWR measurements up to 9% higher.

Mechanical Specifications

Cable Assembly

Cable Type	150 Series
------------	------------

Temperature

Temperature Operating Range, deg C	-50 to +205
------------------------------------	-------------

Size

Length, in [mm]	30 [762]
One Time Minimum Bend Radius, in [mm]	1 [25.4]

Cable

Center Conductor Type	Solid
Cable Inner Conductor	Copper Clad Steel, Silver
No of Shields	1
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter, in [mm]	0.15 [3.81]

Connector 1

Type	SMA Male
Configuration	Straight
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size, in.	5/16
Torque, in-lbs [Nm]	8 [0.9]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE

Connector 2

Type	SMA Male Right Angle
------	----------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Precision Cable 30 Inch Length Using 150 Series Coax, RoHS PE35418-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Male to SMA Male Right Angle Precision Cable
30 Inch Length Using 150 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35418-30

Configuration	Right Angle
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size, in.	5/16
Torque, in-lbs [Nm]	8 [0.9]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------


SMA Male to SMA Male Right Angle Precision Cable 30 Inch Length Using 150 Series Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Precision Cable 30 Inch Length Using 150 Series Coax, RoHS PE35418-30](http://www.pasternack.com/sma-male-sma-male-150-series-cable-assembly-pe35418-30-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-male-150-series-cable-assembly-pe35418-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE35418-30 CAD Drawing
 SMA Male to SMA Male Right Angle Precision Cable
 30 Inch Length Using 150 Series Coax, RoHS

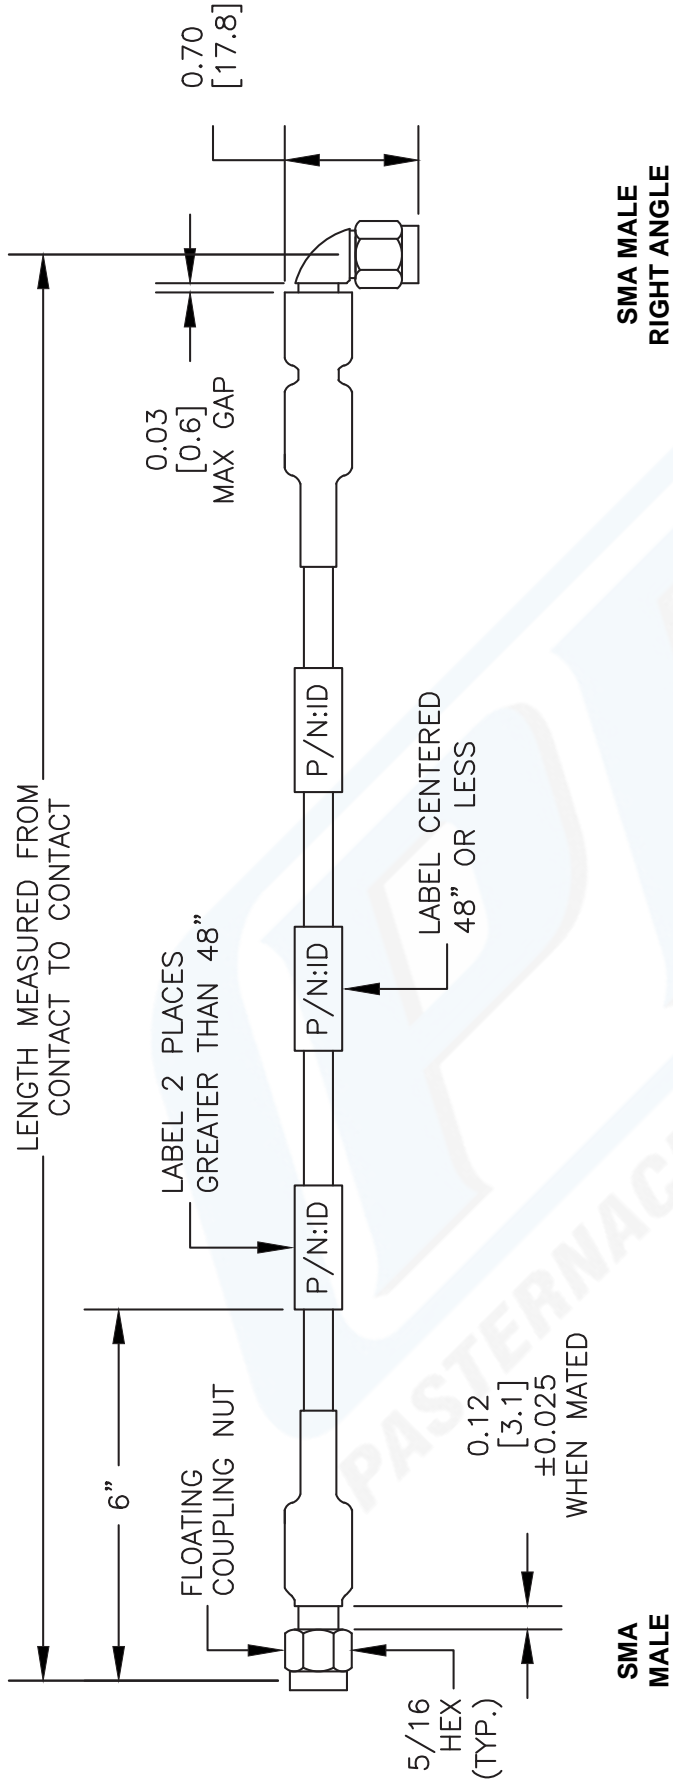

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration	Examples	-12	12"	-25CM	25Cm
PE3 <input type="text"/> ZZ <input type="text"/> YY <input type="text"/> - <input type="text"/> XX <input type="text"/> UU <input type="text"/>	PE3000LF-100	-24	24"	-50CM	50Cm
	PE3000-100	-36	36"	-75CM	75Cm
	PE3000LF-100CM	-48	48"	-100CM	100Cm
	PE3000-100CM	-60	60"	-125CM	125Cm
		-XX	Custom Length	-XXCM	Custom Length

LF = RoHS Compliant
 < Blank > = Standard
 Note: LF applies only to RF cables

CM = Centimeters
 < Blank > = Inches
 Length

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE35418

PASTERNAK
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE 030308-A

FSCM NO. 53919

SCALE N/A

SIZE A

2233