



SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35419-18

**SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS**

**Configuration**

Connector 1	SMA Male
Connector 2	TNC Male
Cable Type	150 Series

**Electrical Specifications**

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.4:1
Velocity of Propagation, %	69.5
RF Shielding, dB	90
Maximum Operating Voltage, Vrms	1,900

**Typical Electrical Specifications**

**Frequency 1**

Frequency, GHz	2
VSWR	1.11:1
Insertion Loss	0.21 dB/ft [ 0.69 dB/m ]

**Frequency 2**

Frequency, GHz	6
VSWR	1.15:1
Insertion Loss	0.32 dB/ft [ 1.05 dB/m ]

**Frequency 3**

Frequency, GHz	10
VSWR	1.23:1
Insertion Loss	0.42 dB/ft [ 1.38 dB/m ]

**Frequency 4**

Frequency, GHz	14
VSWR	1.33:1
Insertion Loss	0.53 dB/ft [ 1.74 dB/m ]

**Frequency 5**

Frequency, GHz	18
VSWR	1.38:1
Insertion Loss	0.64 dB/ft [ 2.1 dB/m ]

Electrical Specification Notes:

Short lengths up to 24" long may exhibit VSWR measurements up to 9% higher.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS PE35419-18](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS

### TECHNICAL DATA SHEET

PE35419-18

#### Mechanical Specifications

##### Cable Assembly

Cable Type 150 Series

##### Temperature

Temperature Operating Range, deg C -50 to +205

##### Size

Length, in [mm] 18 [457.2]

One Time Minimum Bend Radius, in [mm] 1 [25.4]

##### Cable

Center Conductor Type Solid  
 Cable Inner Conductor Copper Clad Steel, Silver  
 No of Shields 1  
 Dielectric Type PTFE  
 Jacket Material FEP  
 Jacket Diameter, in [mm] 0.15 [3.81]

##### Connector 1

Type SMA Male  
 Configuration Straight  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Coupling Nut Material and Plating Passivated Stainless Steel  
 Hex Size, in. 5/16  
 Torque, in-lbs [Nm] 8 [0.9]  
 Body Material and Plating Passivated Stainless Steel  
 Dielectric Type PTFE

##### Connector 2

Type TNC Male  
 Configuration Straight  
 Inner Conductor Material and Plating Gold  
 Coupling Nut Material and Plating Passivated Stainless Steel  
 Hex Size, in. 5/8  
 Torque, in-lbs [Nm] 14 [1.58]  
 Body Material and Plating Passivated Stainless Steel  
 Dielectric Type PTFE

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS PE35419-18](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Male to TNC Male Precision Cable 18 Inch  
Length Using 150 Series Coax, RoHS

TECHNICAL DATA SHEET

PE35419-18

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS PE35419-18](http://www.pasternack.com/sma-male-tnc-male-150-series-cable-assembly-pe35419-18-p.aspx)

URL: <http://www.pasternack.com/sma-male-tnc-male-150-series-cable-assembly-pe35419-18-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE35419-18 CAD Drawing

SMA Male to TNC Male Precision Cable 18 Inch Length Using 150 Series Coax, RoHS

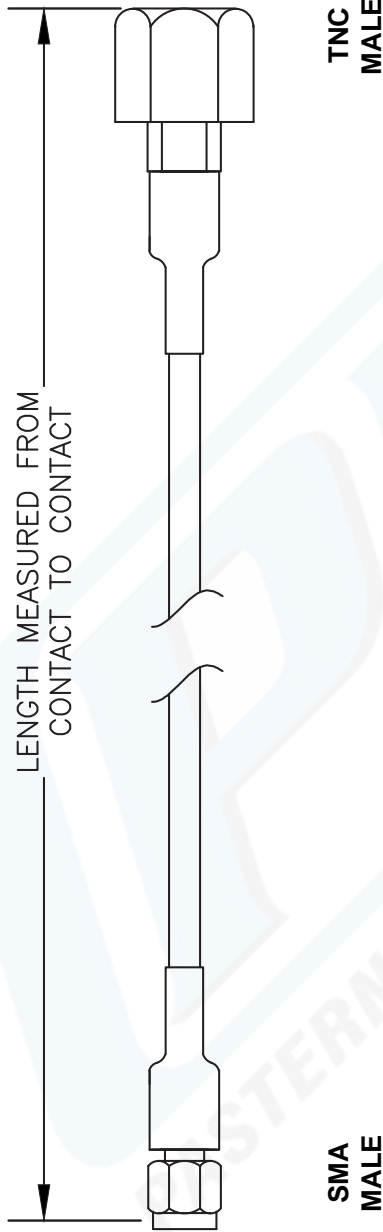

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<b>Part Number Configuration</b> PE3 <input type="text" value="zzz"/> <input type="text" value="yy"/> - <input type="text" value="xx"/> <input type="text" value="uu"/> 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables		-12	12"	-25CM	25Cm
Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM CM = Centimeters < Blank > = Inches Length		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-XX	Custom Length	-XXCM	Custom Length

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE35419**  
 FSCM NO. 53919  
 CAD FILE 030813  
 SCALE N/A  
 SIZE A  
 2233

**PE PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com