




## N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax

## RF Cable Assemblies Technical Data Sheet

PE35785-24

**Configuration**

- Connector 1: N Male
- Connector 2: TNC Male
- Cable Type: PE-C195

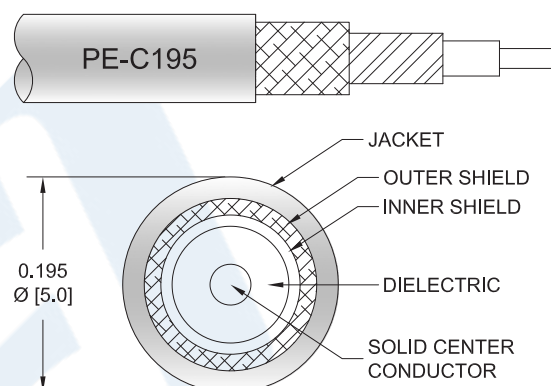**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		80		%
RF Shielding	90			dB
Capacitance		25.4 [83.33]		pF/ft [pF/m]
Jacket Spark			5,000	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.31	0.357	0.423	0.562	0.764	dB

**Mechanical Specifications****Cable Assembly**

Length*	24 in [609.6 mm]
Weight	0.139 lbs [63.05 g]

**Cable**

Cable Type	PE-C195
Impedance	50 Ohms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax PE35785-24](#)



## N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax

### RF Cable Assemblies Technical Data Sheet

PE35785-24

Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	TNC Male
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Gold
Contact Plating Specification		30μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification		100μ in. minimum

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

##### Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax PE35785-24](#)



## N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax

### RF Cable Assemblies Technical Data Sheet

PE35785-24

#### How to Order

Part Number Configuration:

PE35785

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE35785-12 = 12 inches long cable  
PE35785-100cm = 100 cm long cable


N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Cable 24 Inch Length Using PE-C195 Coax PE35785-24](#)

URL: <https://www.pasternack.com/n-male-tnc-male-pe-c195-cable-assembly-pe35785-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX	Custom Length in Inches

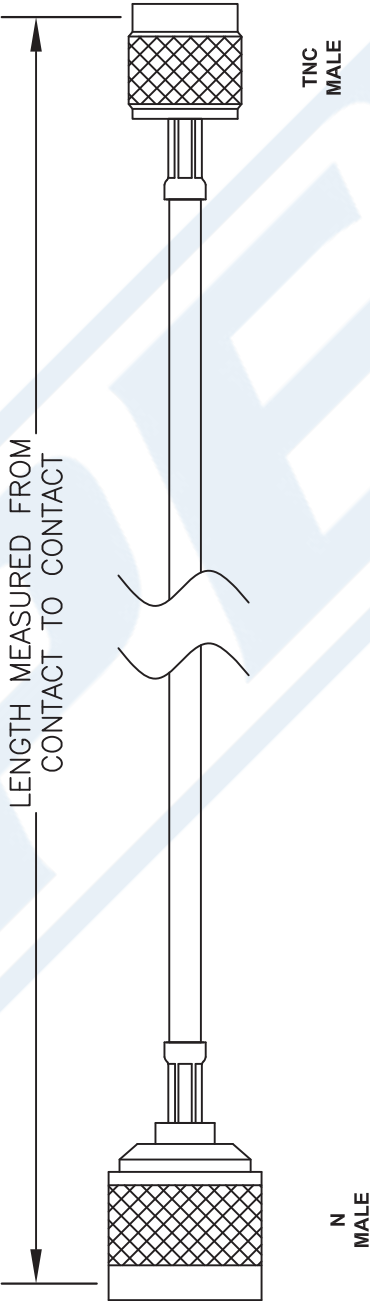

<div><div><div><div><div>PASTERNACK®</div><div>Pasternack Enterprises, Inc.</div><div>P.O. Box 16759   Irvine   CA   92623</div><div>Phone: (949) 261-1920   Fax: (949) 261-7451</div><div>Website: <a href="http://www.pasternack.com">www.pasternack.com</a>   E-Mail: <a href="mailto:sales@pasternack.com">sales@pasternack.com</a></div></div></div></div></div>						DWG TITLE		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.		
REV. A		FSCM NO. 53919	CAD FILE 082411	SCALE N/A	SIZE A	2231				
PE35785-XX										