



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| N MALE     | 50 OHM    |
| N MALE     | 50 OHM    |
| RG393/U    | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |



RoHS  
Compliance  
Certified

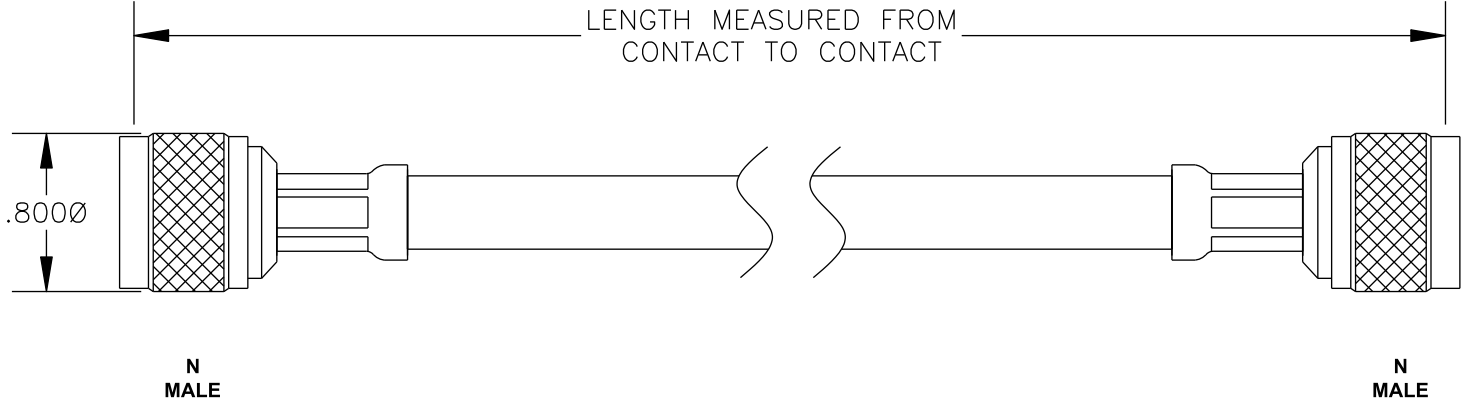

**PASTERNAK ENTERPRISES, INC.**  
 P.O BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451  
  
 WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**

|                                 |                |  |                      |
|---------------------------------|----------------|--|----------------------|
| DWG TITLE<br><b>PE3607LF-XX</b> |                | DES. CABLE ASSEMBLY, RG393/U, N MALE TO N MALE (LEAD FREE) |                      |
| REV. A                          | FSCM NO. 53919 | CAD FILE 021108  | SCALE N/A SIZE A 127 |

**NOTES:**

- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
- DIMENSIONS ARE IN INCHES.
- LENGTH TOLERANCE IS ± 1.5% OR ±3/8", WHICHEVER IS GREATER.