



75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length
Using 75 Ohm RG59 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE36141LF-72

Configuration

- Connector 1: F Male
- Connector 2: F Male
- Cable Type: RG59

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC (NC) Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE36141LF-72 75 ohm type F male to 75 ohm type F male 72 inch cable using 75 ohm RG59 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type F to type F cable assembly has a male to male gender configuration with 75 ohm flexible RG59 coax. The PE36141LF-72 type F male to type F male cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Velocity of Propagation		66		%
Capacitance		20.6 [67.59]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.305	0.41	0.515	0.665	0.89	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length Using 75 Ohm RG59 Coax, LF Solder, RoHS PE36141LF-72](#)



75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length
Using 75 Ohm RG59 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE36141LF-72

Mechanical Specifications

Cable Assembly

Length*	72 in [182.88 cm]
Diameter	0.433 in [11 mm]
Weight	0.462 lbs [209.56 g]

Cable

Cable Type	RG59
Impedance	75 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.242 in [6.15 mm]

Connectors

Description	Connector 1	Connector 2
Type	F Male	F Male
Impedance	75 Ohms	75 Ohms
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100µ in. minimum	100µ in. minimum
Hex Size	7/16 in	7/16 in
Torque	15 in-lbs [1.7 Nm]	15 in-lbs [1.7 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length Using 75 Ohm RG59 Coax, LF Solder, RoHS PE36141LF-72](#)



75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length
Using 75 Ohm RG59 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE36141LF-72

How to Order

Part Number Configuration:

PE36141LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE36141LF-12 = 12 inches long cable
PE36141LF-100cm = 100 cm long cable

75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length Using 75 Ohm RG59 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length Using 75 Ohm RG59 Coax, LF Solder, RoHS PE36141LF-72](https://www.pasternack.com/f-male-f-male-rg59bu-cable-assembly-pe36141lf-72-p.aspx)


URL: <https://www.pasternack.com/f-male-f-male-rg59bu-cable-assembly-pe36141lf-72-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE36141LF-72 CAD Drawing

75 Ohm F Male to 75 Ohm F Male Cable 72 Inch Length
Using 75 Ohm RG59 Coax, LF Solder, RoHS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR PE36141	1/29/2020	SELLIS

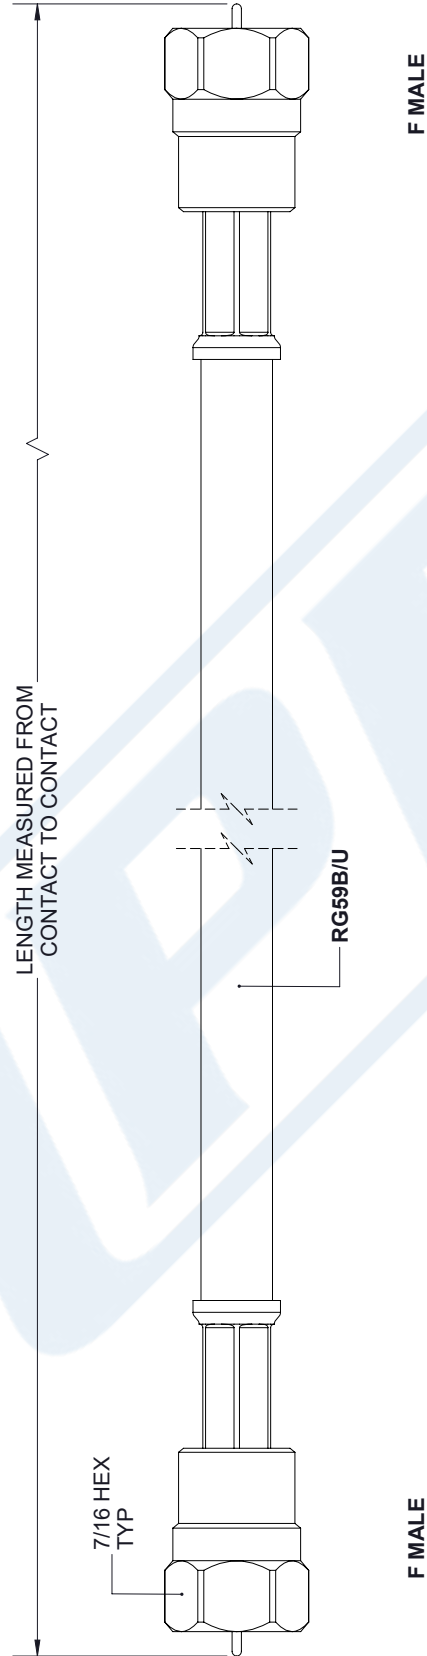

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L	= +5% L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET	1	OF	1
SCALE	N/A		

PASTERNAK®
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	K.DANG	PE36141LF
REV			A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.