

75 Ohm F Male to 75 Ohm F Female Bulkhead Cable 24 Inch Length Using 75 Ohm RG179 Coax



## **TECHNICAL DATA SHEET**

## PE36344-24

### Configuration

Connector 1 Connector 2 Cable Type Impedance

### **Mechanical Specifications**

Size Length Diameter

Weight Cable Color

#### Cable

Cable Type Inner Conductor Type Cable Inner Conductor No of Shields Dielectric Type Jacket Material Jacket Diameter

### **Connector 1**

Type Configuration Inner Conductor Material and Plating Coupling Nut Material and Plating Coupling Nut Plating Specification Hex Size Torque Body Material and Plating Body Plating Specification Dielectric Type

#### Connector 2

Type Configuration Mount Method Inner Conductor Material and Plating Inner Conductor Plating Specification Body Material and Plating Body Plating Specification Dielectric Type F Male F Female Bulkhead RG179 75 Ohms

24 in [609.6 mm] 0.509 in [12.93 mm] 0.127 lbs [57.61 g] Tan

RG179 Stranded Copper Clad Steel, Silver 1 PTFE FEP 0.1 in [2.54 mm]

F Male Straight Brass, Gold Brass, Nickel 100µ in. minimum 7/16 in 15 in-lbs [1.7 Nm] Brass, Nickel 100µ in. minimum Teflon

F Female Bulkhead Straight Bulkhead Phosphor Bronze, Gold 30µ in. minimum Brass, Nickel 100µ in. minimum Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm F Male to 75 Ohm F Female Bulkhead Cable 24 Inch Length Using 75 Ohm RG179 Coax PE36344-24

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com






75 Ohm F Male to 75 Ohm F Female Bulkhead Cable 24 Inch Length Using 75 Ohm RG179 Coax

## **TECHNICAL DATA SHEET**

# PE36344-24

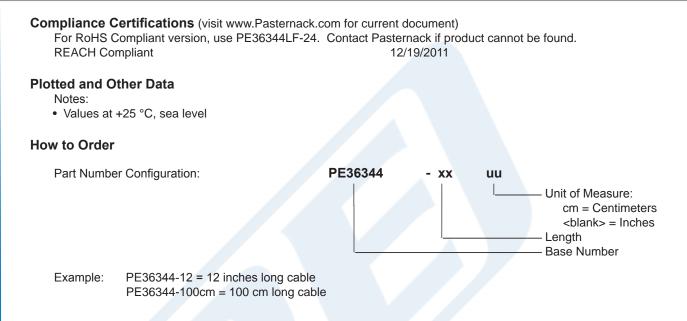

75 Ohm F Male to 75 Ohm F Female Bulkhead Cable 24 Inch Length Using 75 Ohm RG179 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm F Male to 75 Ohm F Female Bulkhead Cable 24 Inch Length Using 75 Ohm RG179 Coax PE36344-24


URL: http://www.pasternack.com/f-male-f-female-rg179bu-cable-assembly-pe36344-24-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

PE36344-24 CAD Drawing 75 Ohm F Male to 75 Ohm F Female Bulkhead Cable 24 Inch Length Using 75 Ohm RG179 Coax

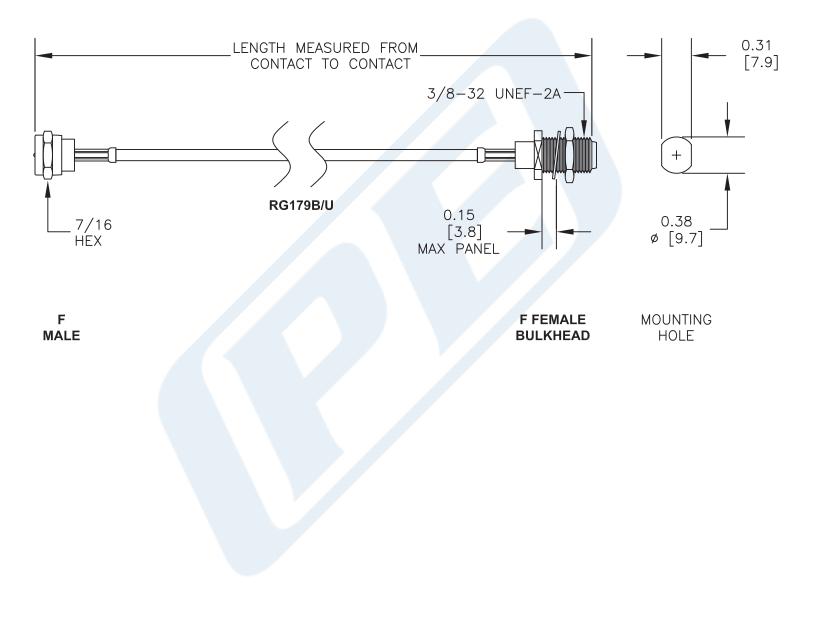

PEP PASTERNACK* THE ENGINEER'S RF SOURCE	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.						
Pasternack Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623	DWG TITLE			FSCM NO. 53919			
	PE36344			F3CW NO. 55919			
Website: www.pasternack.com   E-Mail: sales@pasternack.com	CAD FILE	082411	so	CALE N/A	SIZE A	2231	