

1.85mm Male to 1.85mm Male Cable 18 Inch Length Using RG405 Coax, RoHS



RF Cable Assemblies Technical Data Sheet

PE36523LF-18

Configuration

- Connector 1: 1.85mm Male
- Connector 2: 1.85mm Male
- Cable Type: RG405

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	20	30	40	GHz
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

Mechanical Specifications

Cable Assembly Length Diameter Weight

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 18 in [457.2 mm] 0.312 in [7.92 mm] 0.031 lbs [14.06 g]

RG405 50 Ohms Solid Copper Clad Steel, Silver PTFE 1 Copper

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Male Cable 18 Inch Length Using RG405 Coax, RoHS PE36523LF-18

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



1.85mm Male to 1.85mm Male Cable 18 Inch Length Using RG405 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE36523LF-18

Connectors

Description	Connector 1	Connector 2 1.85mm Male	
Туре	1.85mm Male		
Impedance	50 Ohms	50 Ohms	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Contact Plating Specification	MIL-G-45204, Type II, Class 1	MIL-G-45204, Type II, Class 1	
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
Hex Size	5/16 in.	5/16 in.	
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]	
Body Material and Plating	Stainless Steel, Gold Stainless Steel, G		
Body Plating Specification	MIL-G-45204, Type II, Class 1	MIL-G-45204, Type II, Class 1	

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant REACH Compliant Yes 12/19/2011

Plotted and Other Data

Notes:

Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Male Cable 18 Inch Length Using RG405 Coax, RoHS PE36523LF-18

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com · Techsupport@Pasternack.com




1.85mm Male to 1.85mm Male Cable 18 Inch Length Using RG405 Coax, RoHS



RF Cable Assemblies Technical Data Sheet

PE36523LF-18

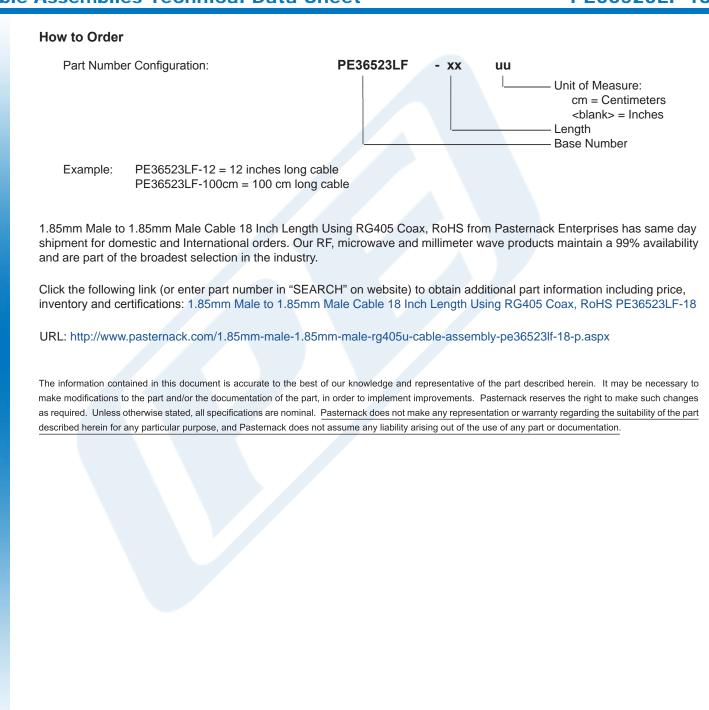

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

PE36523LF-18 CAD Drawing 1.85mm Male to 1.85mm Male Cable 18 Inch Length Using RG405 Coax, RoHS

