



SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE37927LF-24

Configuration

- Connector 1: SMA Male
- Connector 2: MMCX Plug Right Angle
- Cable Type: PE-047SR

Features

- Max Frequency 6 GHz

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE37927LF-24 SMA male to MMCX plug right angle 24 inch cable using PE-047SR coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMA to MMCX cable assembly has a male to plug gender configuration with 50 ohm semi-rigid PE-047SR coax. The PE37927LF-24 SMA male to MMCX plug cable assembly operates to 6 GHz. The right angle MMCX interface on the PE-047SR cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.45:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4	6		GHz
Insertion Loss (Max.)	1.1	1.299	1.699	2.099		dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.3dB of connector loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder PE37927LF-24](#)



SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE37927LF-24

Mechanical Specifications

Cable Assembly

Length*	24 in [609.6 mm]
Diameter	0.312 in [7.92 mm]

Cable

Cable Type	PE-047SR
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor Material and Plating	Copper
Repeated Minimum Bend Radius	0.05 in [1.27 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	MMCX Plug Right Angle
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Beryllium Copper, Gold over Nickel	Brass, Gold
Contact Plating Specification	50 µin minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold over Nickel	Brass, Gold
Body Plating Specification	50 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	50 µin minimum	
Hex Size	5/16 inch	
Torque	7 in-lbs [0.79 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range	-55 to +100 deg C
-----------------	-------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder PE37927LF-24](#)



SMA Male to MMCX Plug Right Angle Cable 24 Inch
Length Using PE-047SR Coax , LF Solder

RF Cable Assemblies Technical Data Sheet


PE37927LF-24

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

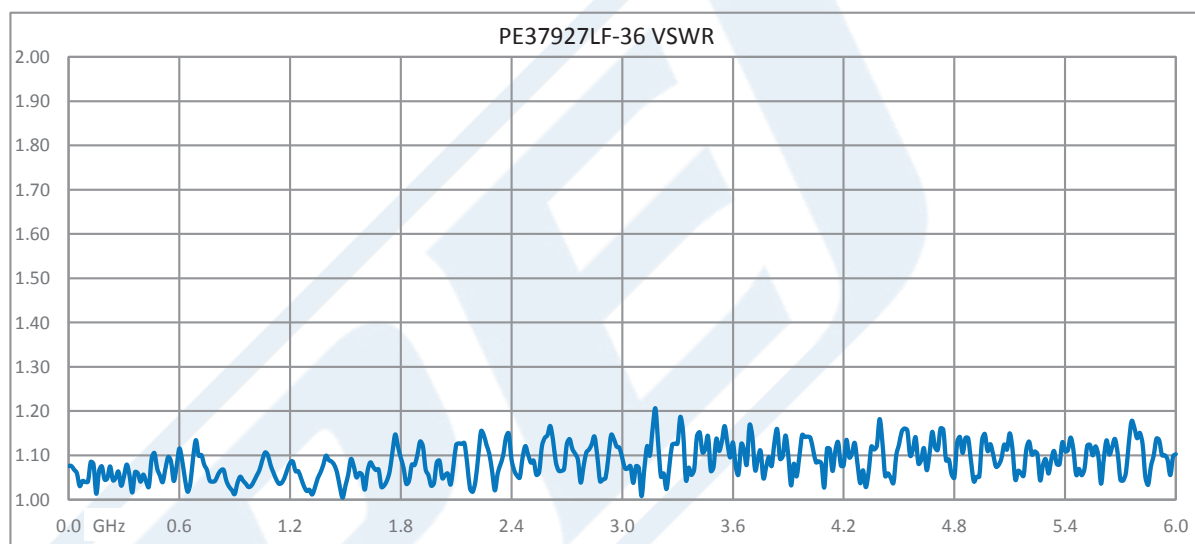

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder PE37927LF-24](#)



SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE37927LF-24

How to Order

Part Number Configuration:

PE37927LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE37927LF-12 = 12 inches long cable
PE37927LF-100cm = 100 cm long cable


SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Right Angle Cable 24 Inch Length Using PE-047SR Coax , LF Solder PE37927LF-24](https://www.pasternack.com/sma-male-mmcx-plug-pe-047sr-cable-assembly-pe37927lf-24-p.aspx)

URL: <https://www.pasternack.com/sma-male-mmcx-plug-pe-047sr-cable-assembly-pe37927lf-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE37927LF-24 CAD Drawing
SMA Male to MMCX Plug Right Angle Cable 24 Inch
Length Using PE-047SR Coax , LF Solder

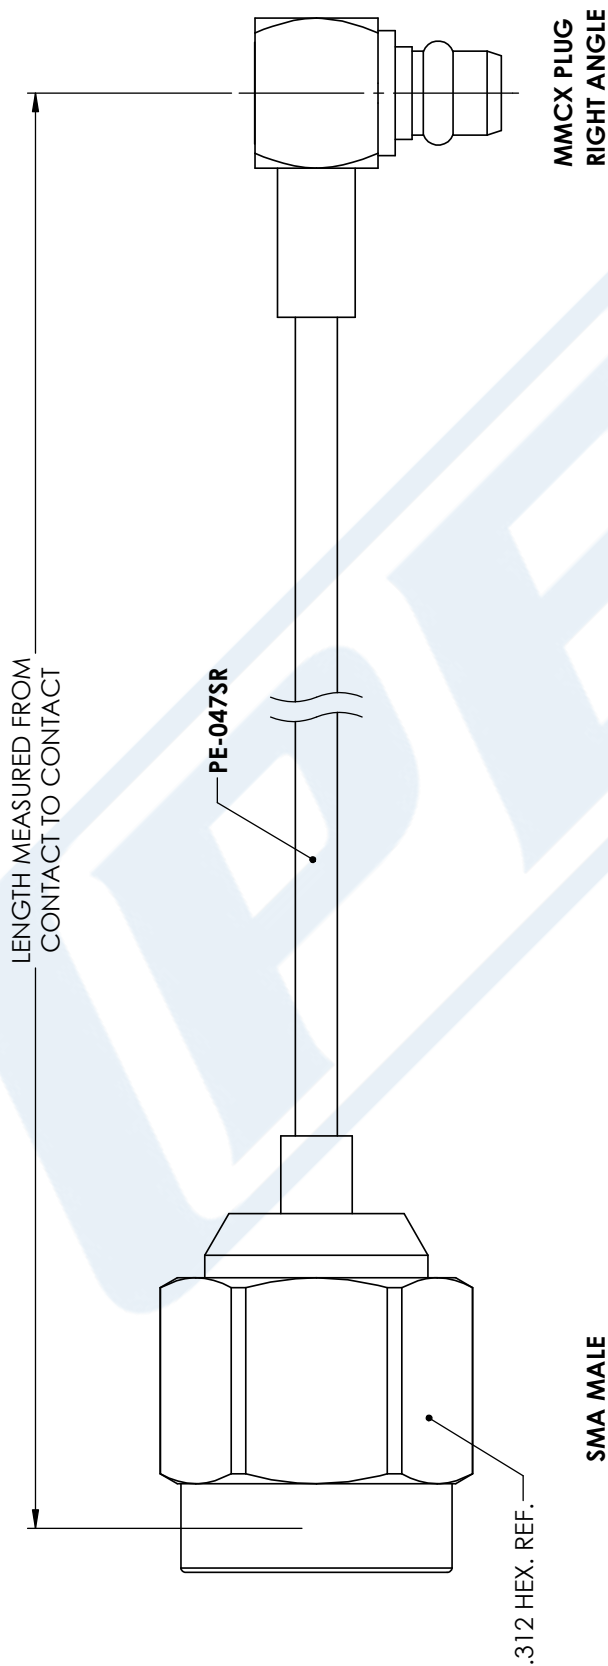

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE
PE37927LF

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 10/15/18

SCALE N/A

SIZE A

CN2245