



SMA Male Right Angle to SMA Female
Bulkhead Cable Using RG316 Coax

RF Cable Assemblies - PE3836

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female Bulkhead
- Cable Type: RG316

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------|---------|-------------|---------|--------------|
| Capacitance | | 32 [104.99] | | pF/ft [pF/m] |

Mechanical Specifications

Cable Assembly

| | |
|-----------------|---------------------|
| Diameter | 0.315 in [8 mm] |
| Weight | 0.032 lbs [14.51 g] |
| Cable Color | Tan |
| Connection Type | In-Series |

Cable

| | |
|--------------------------------------|----------------------------|
| Cable Type | RG316 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Stranded |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 1 |
| Shield Layer 1 | Silver Plated Copper Braid |
| Jacket Material | FEP |
| Jacket Diameter | 0.098 in [2.49 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using RG316 Coax PE3836](#)



SMA Male Right Angle to SMA Female Bulkhead
Bulkhead Cable Using RG316 Coax

RF Cable Assemblies - PE3836

Connectors

| Description | Connector 1 | Connector 2 |
|-------------------------------|----------------------|---------------------|
| Type | SMA Male Right Angle | SMA Female Bulkhead |
| Specification | MIL-STD-348A | |
| Impedance | 50 Ohms | 50 Ohms |
| Connection Method | Standard | Standard |
| Contact Material and Plating | Brass, Gold | Gold |
| Contact Plating Specification | 50µ in. minimum | |
| Dielectric Type | Teflon | |
| Hex Size | 5/16 in | |
| Torque | 5 in-lbs [0.57 Nm] | [] |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum | |

Environmental Specifications

Compliance Certifications (visit www.Pasternack.com for current document)

For RoHS Compliant version, use PE3836LF. Contact Pasternack if product cannot be found.
REACH Compliant 06/18/2012

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using RG316 Coax PE3836](#)



SMA Male Right Angle to SMA Female
Bulkhead Cable Using RG316 Coax

RF Cable Assemblies - PE3836

How to Order

Part Number Configuration:

PE3836

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3836-12 = 12 inches long cable
PE3836-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Bulkhead Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using RG316 Coax PE3836](#)


URL: <http://www.pasternack.com/sma-male-sma-female-rg316u-cable-assembly-pe3836-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3836 CAD Drawing

SMA Male Right Angle to SMA Female Bulkhead Cable Using RG316 Coax

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in Inches |

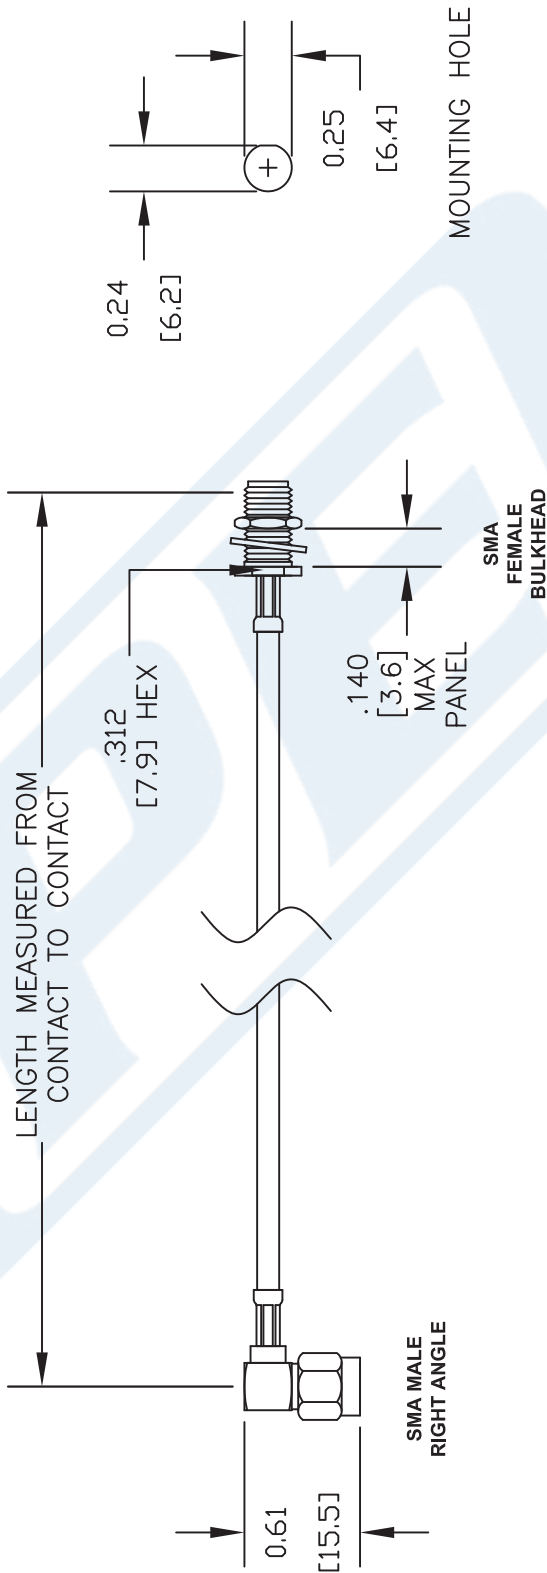

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE3836-XX

REV. A FSCM NO. 53919 CAD FILE 120708 SCALE N/A SIZE A 127

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com