



SMA Male Right Angle to SMA Female Bulkhead  
Cable 36 Inch Length Using RG316 Coax, RoHS

## RF Cable Assemblies - PE3836LF-36

### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female Bulkhead
- Cable Type: RG316

### Electrical Specifications

| Description | Minimum | Typical     | Maximum | Units        |
|-------------|---------|-------------|---------|--------------|
| Capacitance |         | 32 [104.99] |         | pF/ft [pF/m] |

### Mechanical Specifications

#### Cable Assembly

|                 |                     |
|-----------------|---------------------|
| Length          | 36 in [914.4 mm]    |
| Diameter        | 0.315 in [8 mm]     |
| Weight          | 0.032 lbs [14.51 g] |
| Cable Color     | Tan                 |
| Connection Type | In-Series           |

#### Cable

|                                      |                            |
|--------------------------------------|----------------------------|
| Cable Type                           | RG316                      |
| Impedance                            | 50 Ohms                    |
| Inner Conductor Type                 | Stranded                   |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver  |
| Dielectric Type                      | PTFE                       |
| Number of Shields                    | 1                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Jacket Material                      | FEP                        |
| Jacket Diameter                      | 0.098 in [2.49 mm]         |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 36 Inch Length Using RG316 Coax, RoHS PE3836LF-36](#)



SMA Male Right Angle to SMA Female Bulkhead  
Cable 36 Inch Length Using RG316 Coax, RoHS

## RF Cable Assemblies - PE3836LF-36

### Connectors

| Description                   | Connector 1          | Connector 2         |
|-------------------------------|----------------------|---------------------|
| Type                          | SMA Male Right Angle | SMA Female Bulkhead |
| Specification                 | MIL-STD-348A         |                     |
| Impedance                     | 50 Ohms              | 50 Ohms             |
| Connection Method             | Standard             | Standard            |
| Contact Material and Plating  | Brass, Gold          | Gold                |
| Contact Plating Specification | 50µ in. minimum      |                     |
| Dielectric Type               | Teflon               |                     |
| Hex Size                      | 5/16 in              |                     |
| Torque                        | 5 in-lbs [0.57 Nm]   | [ ]                 |
| Body Material and Plating     | Brass, Nickel        | Brass, Nickel       |
| Body Plating Specification    | 100µ in. minimum     |                     |

### Environmental Specifications

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

|                 |            |
|-----------------|------------|
| RoHS Compliant  | Yes        |
| REACH Compliant | 06/18/2012 |

#### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 36 Inch Length Using RG316 Coax, RoHS PE3836LF-36](#)



SMA Male Right Angle to SMA Female Bulkhead  
Cable 36 Inch Length Using RG316 Coax, RoHS

## RF Cable Assemblies - PE3836LF-36

### How to Order

Part Number Configuration:

PE3836LF

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3836LF-12 = 12 inches long cable  
PE3836LF-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Bulkhead Cable 36 Inch Length Using RG316 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable 36 Inch Length Using RG316 Coax, RoHS PE3836LF-36](#)

URL: <http://www.pasternack.com/sma-male-sma-female-rg316u-cable-assembly-pe3836lf-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

## SMA Male Right Angle to SMA Female Bulkhead Cable 36 Inch Length Using RG316 Coax, RoHS

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in Inches |

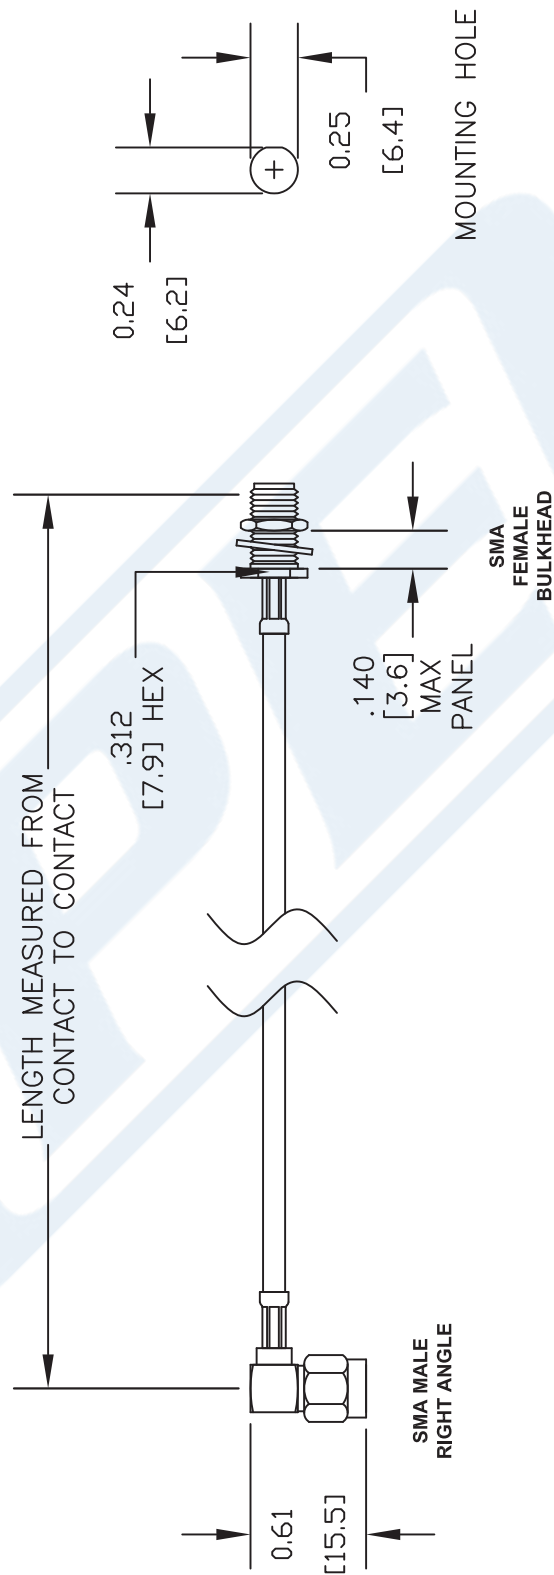

**DWG TITLE**

**PE3836LF-XX**

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

**Phone:** (949) 201-1320 | **Fax:** (949) 201-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

FSCM NO. 53919

**CAD FILE 120708**

SCALE N/A

A

127