



## SMA Female to SMA Female Cable 6 Inch Length Using RG402 Coax

**PE3931-6**

### SMA Female to SMA Female .141 Semirigid Cable Assembly

Pasternack semirigid cable assembly are built in house and shipped same day using quality components.

- PE3931-xx Semirigid cable assemblies are available in standard inch lengths of 12, 24, 36, 48, and 60 inches . Custom lengths are available on request.
- 100% Continuity and RF tested
- Semirigid Cable Assemblies are available in any length with many connector combinations to meet your specific requirements
- Semirigid cable options include .141(RG402), .085(RG405), .250(RG401) and a limited selection of .047
- Our PE-SR402FL and PE-SR402FLJ Formable Coax versions with and without FEP jacket material are also available.

### Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Cable Type	RG402 (.141 Semirigid)

### Electrical Specifications

Frequency Range (GHz)	0 to 18
Impedance (Ohms)	50
VSWR, Max	≤1.35:1
Insertion Loss, Maximum	0.66dB/ft + 0.2dB
Velocity of Propagation (%)	69.5
RF Shielding (dB)	>100
Power, Max Input (Avg Watts @ 1 GHz)	650

#### Frequency 1

Frequency (GHz)	0 to 6
VSWR	1.15:1
Insertion Loss	0.3dB/ft + 0.1dB

#### Frequency 2

Frequency (GHz)	6 to 12
VSWR	1.25:1
Insertion Loss	0.4dB/ft + 0.15dB

#### Frequency 3

Frequency (GHz)	12 to 18
VSWR	1.35:1
Insertion Loss	0.66db/ft + 0.2db

Click the following link for the additional product information:

[SMA Female to SMA Female Cable Using RG402 Coax PE3931-6](#)

Version C - Revision - © 2011 Pasternack Enterprises All Rights Reserved.



## SMA Female to SMA Female Cable 6 Inch Length Using RG402 Coax

**PE3931-6**

### Mechanical Specifications

#### Cable Assembly

Cable Type	RG402 (.141 Semirigid)
Minimum Bend Radius, Repeated (in(mm))	0.15 (3.81)
Temperature Operating Range (deg C)	-55 to +125
Weight (Lbs)	0.0062 + .034/ft

#### Cable

Cable Inner Conductor	Silver covered Copper Clad Steel
No of Shields	1
Cable Outer Conductor	Bare Copper Tube
Dielectric Type	Solid PTFE
Jacket Diameter (in(mm))	0.141(0.358)

#### Connector 1

Type	SMA Female
Configuration	Straight
Mating Cycles	500
Body Material and Plating	Brass, Ni/Au
Inner Conductor Material and Plating	BeCu, Ni/Au
Outer Conductor Material and Plating	Brass, NiAu
Dielectric Type	PTFE

#### Connector 2

Type	SMA Female
Configuration	Straight
Mating Cycles	500
Body Material and Plating	Brass, Ni/Au
Inner Conductor Material and Plating	BeCu, Ni/Au
Outer Conductor Material and Plating	Brass, NiAu
Dielectric Type	PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

### Other Data


URL: <http://www.pasternack.com/sma-female-sma-female-rg402u-cable-assembly-pe3931-p.aspx>

SMA Female to SMA Female Cable Using RG402 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Version C - Revision - © 2011 Pasternack Enterprises All Rights Reserved.

PE3931-6 CAD Drawing

SMA Female to SMA Female Cable 6 Inch Length Using RG402 Coax

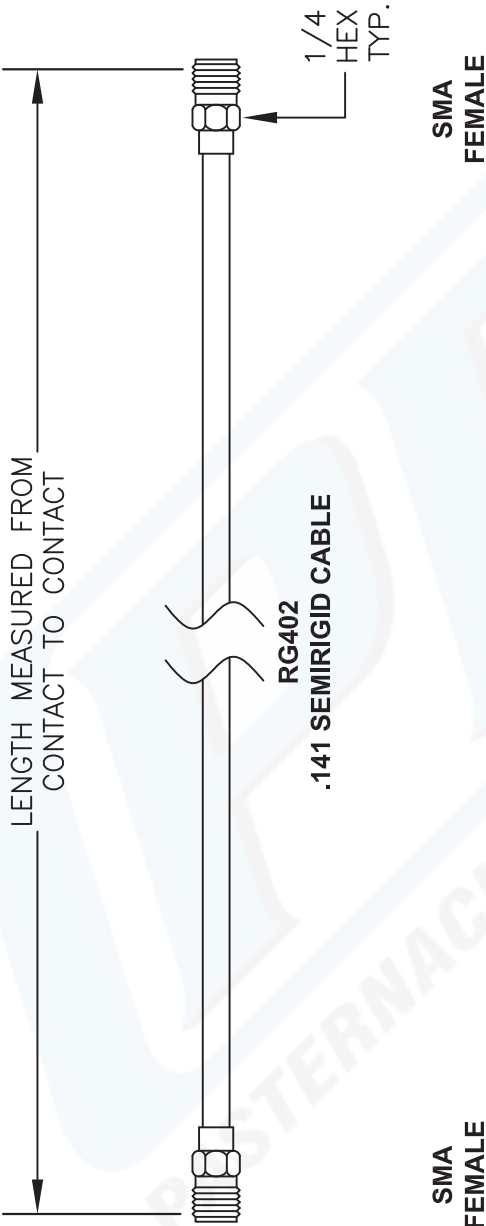

How To Order			Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<div>Part Number Configuration</div> <div>PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div></div> <div>00 - 99999</div> <div>LF = Lead Free</div> <div>&lt; Blank &gt; = Standard</div> <div>Note: LF applies only to RF cables</div>		<div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div>	-12	12"	-25CM	25Cm
			-24	24"	-50CM	50Cm
			-36	36"	-75CM	75Cm
			-48	48"	-100CM	100Cm
			-60	60"	-125CM	125Cm
			-xx	Custom Length	-xxCM	Custom Length



PASTERNAK ENTERPRISES®

ESTABLISHED 1972

PASTERNAK ENTERPRISES, INC.  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
COAXIAL & FIBER OPTICS

DWG TITLE  
**PE3931**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

REV.	FSCM NO.	CAD FILE	SCALE	SIZE	
-	53919	080112	N/A	A	2233