



## SMA Male to Violet FAKRA Plug Cable Using RG316 Coax

### RF Cable Assemblies Technical Data Sheet

PE39343H

#### Configuration

- Connector 1: SMA Male
- Connector 2: FAKRA Plug
- Cable Type: RG316

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Capacitance		32 [104.99]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)						dB/m
	0.31	0.36	0.438	0.58	0.78	dB/ft
	1.02	1.18	1.44	1.9	2.56	dB/m
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

#### Mechanical Specifications

##### Cable Assembly

Diameter 0.37 in [9.4 mm]

Weight 0.025 lbs [11.34 g]

##### Cable

Cable Type RG316  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Violet FAKRA Plug Cable Using RG316 Coax PE39343H](#)



## SMA Male to Violet FAKRA Plug Cable Using RG316 Coax

### RF Cable Assemblies Technical Data Sheet

PE39343H

Jacket Material  
Jacket Diameter

FEP, Tan  
0.098 in [2.49 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male	FAKRA Plug
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	30μ in. Minimum	
Dielectric Type	PTFE	Teflon
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Plastic
Body Plating Specification	100μ in. Minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100μ in. Minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Violet FAKRA Plug Cable Using RG316 Coax PE39343H](#)



## SMA Male to Violet FAKRA Plug Cable Using RG316 Coax

### RF Cable Assemblies Technical Data Sheet

PE39343H

#### How to Order

Part Number Configuration:

**PE39343H**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE39343H-12 = 12 inches long cable  
PE39343H-100cm = 100 cm long cable


SMA Male to Violet FAKRA Plug Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to Violet FAKRA Plug Cable Using RG316 Coax PE39343H](#)

URL: <https://www.pasternack.com/sma-male-fakra-plug-rg316u-cable-assembly-pe39343h-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39343H CAD Drawing  
SMA Male to Violet FAKRA Plug Cable Using RG316 Coax

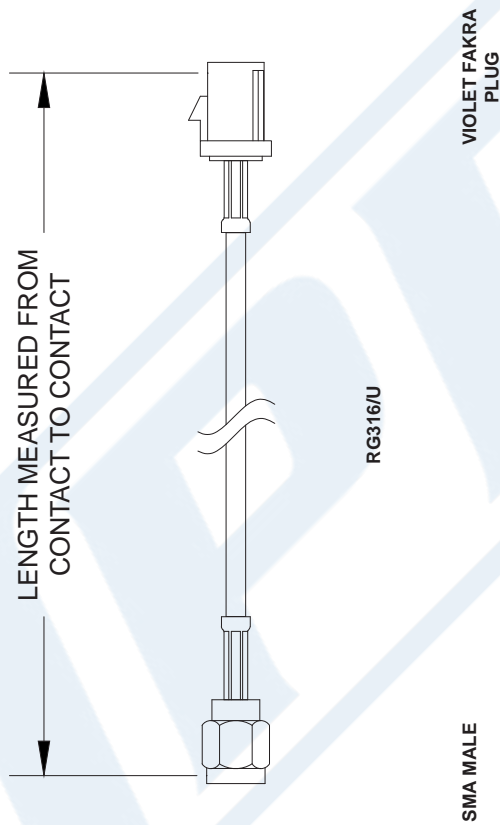

How To Order			Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<b>Part Number Configuration</b> PE3 [zzz] [yy] - [xx] [uu] 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables	<b>Examples</b> PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM		-12 -24 -36 -48 -60 -xx	12" 24" 36" 48" 60" Custom Length	-25CM -50CM -75CM -100CM -125CM -xxCM	25Cm 50Cm 75Cm 100Cm 125Cm Custom Length

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE  
**PE39343H**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

FSCM NO. 53919	CAD FILE 41613	SCALE N/A	SIZE A
----------------	----------------	-----------	--------