

SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS

TECHNICAL DATA SHEET

PE39427-6

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a FEP jacket and are RoHS compliant,

Features

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- · Cable may be formed by hand and does not require special tools to bend
- · May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- · 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

Configuration

Connector 1 SMA Male

SMA Female Bulkhead Connector 2 Cable Type

PE-SR402FL

Electrical Specifications

Frequency Range DC to 18 GHz Impedance 50 Ohms Velocity of Propagation 69.5 %

Group Delay 1.43 ns/ft [4.69 ns/m]

RF Shielding 100 dB

Performance by Frequency

Frequency 1

Frequency 1000 MHz Insertion Loss 0.259 dB

Frequency 2

Frequency 2 GHz Insertion Loss 0.28 dB

Frequency 3

4.5 GHz Frequency Insertion Loss 0.33 dB

Frequency 4

9 GHz Frequency Insertion Loss 0.396 dB

Frequency 5

Frequency 18 GHz

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS PE39427-6

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com



ISO 9001: 2008 Registered



SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS

TECHNICAL DATA SHEET

PE39427-6

Insertion Loss 0.498 dB

Mechanical Specifications

Size

Length 6 in [152.4 mm] Diameter 0.433 in [11 mm] One Time Minimum Bend Radius 0.315 in [8 mm] Repeated Minimum Bend Radius 1.57 in [39.88 mm]

Cable

PE-SR402FL Cable Type Inner Conductor Type Solid Cable Inner Conductor Copper, Silver No of Shields **PTFE**

Dielectric Type

Connector 1

SMA Male Type Configuration Straight

Coupling Nut Material and Plating **Passivated Stainless Steel**

Hex Size 5/16 in. Torque 8 in-lbs [0.9 Nm] **Body Material and Plating** Brass, Gold

Connector 2

Type SMA Female Bulkhead Configuration Straight

Mount Method Bulkhead Inner Conductor Material and Plating

Beryllium Copper, Gold Body Material and Plating Brass, Gold **PTFE** Dielectric Type

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant REACH Compliant 06/18/2012

Plotted and Other Data

Notes:

Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS PE39427-6





SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS

TECHNICAL DATA SHEET

PE39427-6

How to Order



PE39427-6-12 = 12 inches long cable Example: PE39427-6-100cm = 100 cm long cable

SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS PE39427-6

URL: http://www.pasternack.com/sma-male-sma-female-pe-sr402fl-cable-assembly-pe39427-6-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE39427-6 CAD DrawingSMA Male to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FL Coax, RoHS

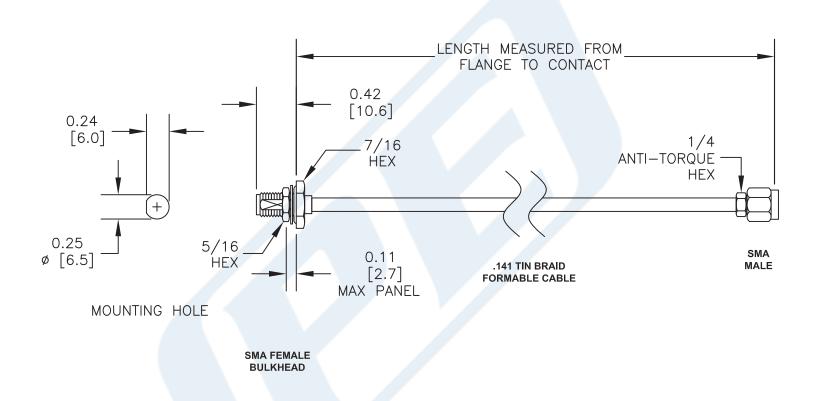

Note: This part is lead free.

