



SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39438-6

Hand Formable SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

Configuration

Connector 1
 Connector 2
 Cable Type

SMA Male Right Angle
 SMA Male Right Angle
 PE-SR402FLJ

Electrical Specifications

Frequency Range, GHz
 Impedance, Ohms
 Maximum VSWR
 Velocity of Propagation, %
 RF Shielding, dB
 Maximum Operating Voltage, Vrms

DC to 10
 50
 1.35:1
 69
 100
 335

Typical Electrical Specifications

Frequency 1

Frequency, MHz
 Insertion Loss

1000
 0.119 dB/ft [0.39 dB/m]

Frequency 2

Frequency, GHz
 Insertion Loss

5
 0.28 dB/ft [0.92 dB/m]

Frequency 3

Frequency, GHz
 Insertion Loss

10
 0.421 dB/ft [1.38 dB/m]

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS PE39438-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





SMA Male Right Angle to SMA Male Right Angle Semi-Flexible
 Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39438-6

Mechanical Specifications

Cable Assembly

Cable Type PE-SR402FLJ

Temperature

Temperature Operating Range, deg C -55 to +125

Size

Length, in [mm] 6 [152.4]

Diameter, in [mm] 0.161 [4.09]

Cable Color Black

One Time Minimum Bend Radius, in [mm] 0.75 [19.05]

Repeated Minimum Bend Radius, in [mm] 1.575 [40.01]

Cable

Center Conductor Type Solid

Cable Inner Conductor Copper, Silver

No of Shields 1

Dielectric Type PTFE

Jacket Material FEP

Jacket Diameter, in [mm] 0.161 [4.09]

Connector 1

Type SMA Male Right Angle

Configuration Right Angle

Connector 2

Type SMA Male Right Angle

Configuration Right Angle

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS PE39438-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Male Right Angle to SMA Male Right Angle Semi-Flexible
Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS

TECHNICAL DATA SHEET

PE39438-6

Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS PE39438-6](http://www.pasternack.com/sma-male-sma-male-pe-sr402flj-cable-assembly-pe39438-6-p.aspx)

URL: <http://www.pasternack.com/sma-male-sma-male-pe-sr402flj-cable-assembly-pe39438-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE39438-6 CAD Drawing

SMA Male Right Angle to SMA Male Right Angle Semi-Flexible Precision
Cable 6 Inch Length Using PE-SR402FLJ Coax, RoHS

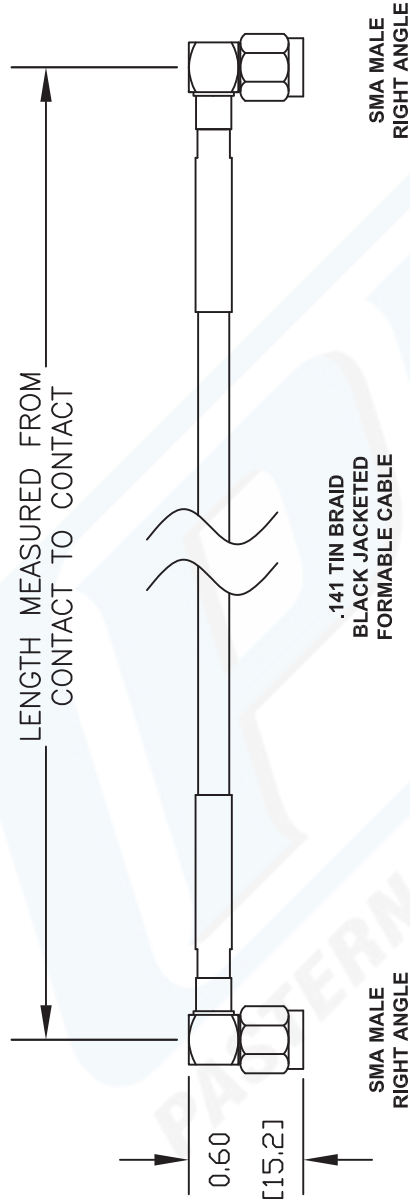

Note: This part is lead free.

How To Order							
Part Number Configuration			Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM	Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
PE3 <input type="text" value="zzz"/> <input type="text" value="yy"/> - <input type="text" value="xx"/> <input type="text" value="uu"/>				-12	12"	-25CM	25Cm
LF = Lead Free				-24	24"	-50CM	50Cm
< Blank > = Standard				-36	36"	-75CM	75Cm
00 - 99999				-48	48"	-100CM	100Cm
CM = Centimeters < Blank > = Inches				-60	60"	-125CM	125Cm
Note: LF applies only to RF cables			-xx	Custom Length	-xxCM	Custom Length	



PASTERNAK ENTERPRISES, INC.
 P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE
PE39438

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

REV. -	FSCM NO. 53919	CAD FILE 041912	SCALE N/A	SIZE A	2231
--------	----------------	-----------------	-----------	--------	------