



## N Male to N Male Semi-Flexible Precision Cable 18 Inch Length Using PE-SR405FL Coax, RoHS

### TECHNICAL DATA SHEET

**PE39443-18**

#### Hand Formable N Male to N Male Semi-Flexible Precision Cable 18 Inch Length Using PE-SR405FL Coax, RoHS

Pasternack's formable cable assemblies are hand formable semi-rigid replacements that are an alternative to costly preformed assemblies. The formable semi-rigid cable alternatives are dimensionally and electrically similar to their semi-rigid counterpart and have a tinned-copper-braid outer shield that provides excellent RF shielding. The hand formable cable assemblies from Pasternack do not require special tooling to shape or reshape the assemblies and can replace standard semi-rigid versions. The assemblies are available with or without a PVC jacket and are RoHS compliant,

- Dimensionally and electrically the same as standard, solid outer conductor semi-rigid coax
- Cable may be formed by hand and does not require special tools to bend
- May be formed more than once without damaging the outer conductor
- High RF Shielding >100 dB
- 100% Hi-pot and continuity tested
- 100% VSWR tested to max frequency of assembly
- Standard and custom lengths ship the same day

#### Configuration

|             |            |
|-------------|------------|
| Connector 1 | N Male     |
| Connector 2 | N Male     |
| Cable Type  | PE-SR405FL |

#### Electrical Specifications

|                                 |          |
|---------------------------------|----------|
| Frequency Range, GHz            | DC to 11 |
| Impedance, Ohms                 | 50       |
| Maximum VSWR                    | 1.35:1   |
| Velocity of Propagation, %      | 69       |
| RF Shielding, dB                | 100      |
| Maximum Operating Voltage, Vrms | 350      |

#### Typical Performance by Frequency

##### Frequency 1

|                |                           |
|----------------|---------------------------|
| Frequency, MHz | 1000                      |
| Insertion Loss | 0.225 dB/ft [ 0.74 dB/m ] |

##### Frequency 2

|                |                          |
|----------------|--------------------------|
| Frequency, GHz | 5                        |
| Insertion Loss | 0.549 dB/ft [ 1.8 dB/m ] |

##### Frequency 3

|                |                           |
|----------------|---------------------------|
| Frequency, GHz | 10                        |
| Insertion Loss | 0.812 dB/ft [ 2.66 dB/m ] |

#### Mechanical Specifications

##### Cable Assembly

|            |            |
|------------|------------|
| Cable Type | PE-SR405FL |
|------------|------------|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Semi-Flexible Precision Cable 18 Inch Length Using PE-SR405FL Coax, RoHS PE39443-18](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## N Male to N Male Semi-Flexible Precision Cable 18 Inch Length Using PE-SR405FL Coax, RoHS

### TECHNICAL DATA SHEET

**PE39443-18**

#### Size

|                                       |              |
|---------------------------------------|--------------|
| Length, in [mm]                       | 18 [457.2]   |
| Diameter, in [mm]                     | 0.086 [2.18] |
| Weight, lbs [g]                       | 0.013 [5.9]  |
| One Time Minimum Bend Radius, in [mm] | 0.37 [9.4]   |

#### Cable

|                       |                           |
|-----------------------|---------------------------|
| Center Conductor Type | Solid                     |
| Cable Inner Conductor | Copper Clad Steel, Silver |
| No of Shields         | 1                         |
| Dielectric Type       | PTFE                      |

#### Connector 1

|               |          |
|---------------|----------|
| Type          | N Male   |
| Configuration | Straight |

#### Connector 2

|               |          |
|---------------|----------|
| Type          | N Male   |
| Configuration | Straight |

#### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

|                |     |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

#### Plotted and Other Data

|        |                            |
|--------|----------------------------|
| Notes: | Values at 25 °C, sea level |
|--------|----------------------------|

N Male to N Male Semi-Flexible Precision Cable 18 Inch Length Using PE-SR405FL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Semi-Flexible Precision Cable 18 Inch Length Using PE-SR405FL Coax, RoHS PE39443-18](http://www.pasternack.com/n-male-n-male-pe-sr405fl-cable-assembly-pe39443-18-p.aspx)

URL: <http://www.pasternack.com/n-male-n-male-pe-sr405fl-cable-assembly-pe39443-18-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE39443-18 CAD Drawing

N Male to N Male Semi-Flexible Precision Cable 18 Inch  
Length Using PE-SR405FL Coax, RoHS

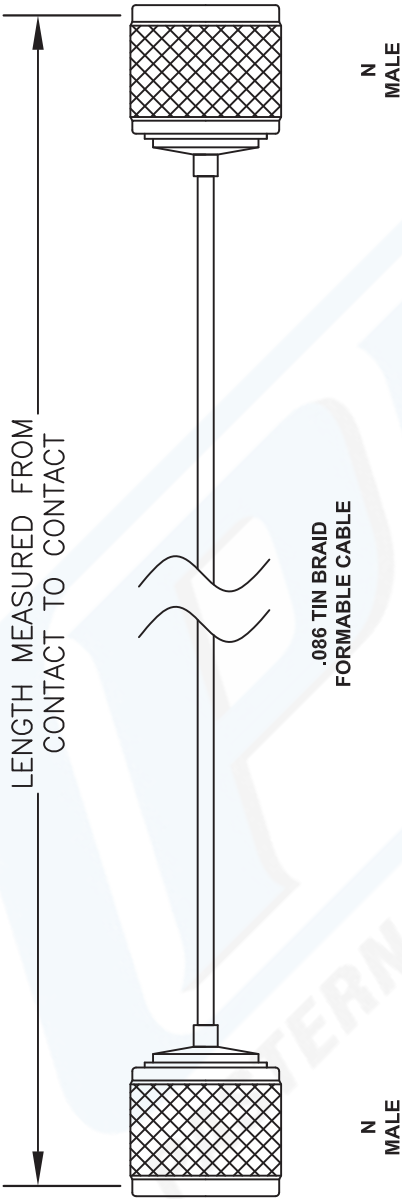

Note: This part is lead free.

| How To Order                                                                                                                                                                                                                                       |  | Part # Ext.                                                                                                         | Length In Inches                                                                          | Part # Ext.                                                                                         | Length In Centimeters                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <div>Part Number Configuration</div> <div>PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div></div> <div>00 - 99999</div> <div>LF = Lead Free</div> <div>&lt; Blank &gt; = Standard</div> <div>Note: LF applies only to RF cables</div> |  | <div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div> | <div>-12</div> <div>-24</div> <div>-36</div> <div>-48</div> <div>-60</div> <div>-xx</div> | <div>12"</div> <div>24"</div> <div>36"</div> <div>48"</div> <div>60"</div> <div>Custom Length</div> | <div>25Cm</div> <div>50Cm</div> <div>75Cm</div> <div>100Cm</div> <div>125Cm</div> <div>Custom Length</div> |

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE39443**

PASTERNAK ENTERPRISES, INC.  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
COAXIAL & FIBER OPTICS



2231

SIZE A

SCALE N/A

CAD FILE 041912

FSCM NO. 53919

REV. -