



7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch
Length Using 1/2 inch Superflexible Coax, RoHS

TECHNICAL DATA SHEET

PE39803-240

Pasternack's corrugated cable assemblies are ideal for applications where durability and high power are needed. These high quality 50 ohm cable assemblies are constructed with a solid copper clad aluminum inner conductor, a foam dielectric, corrugated copper tube, and a tough polyethylene jacket. The solid inner and outer conductors are design to help minimize Intermodulation Distortion (IMD) in communications applications. Durability is ensured thanks to the Injected molded boot on the connectors for added strain relief. Our carefully selected assemblies provide the highest quality on the market with PIM ratings of -160 dBc and 1.11 VSWR's. Available in 1/2" Flexible and 1/2" Superflexible cable types in 7/16 DIN and N Type connector configurations.

Features

- 1/2" Flexible and 1/2" Superflexible cable
- 100% RF and PIM tested
- Low Insertion loss
- Low VSWR at 2.7 GHz
- -160 dBc PIM rating
- Velocity of Propagation at 88%

Configuration

Connector 1	7/16 DIN Male
Connector 2	7/16 DIN Male
Cable Type	1/2" Superflexible

Electrical Specifications

Frequency Range	DC to 2.7 GHz
Impedance	50 Ohms
Maximum VSWR	1.11:1
Velocity of Propagation	83 %
RF Shielding	120 dB
Peak Power	16 KWatts
Passive Intermodulation	-160 dBc

Performance by Frequency

Frequency 1

Frequency	900 MHz
VSWR	1.07:1
Insertion Loss	0.032 dB

Frequency 2

Frequency	1.8 GHz
VSWR	1.09:1
Insertion Loss	0.047 dB

Frequency 3

Frequency	2.2 GHz
VSWR	1.09:1
Insertion Loss	0.053 dB

Frequency 4

Frequency	2.7 GHz
-----------	---------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch Length Using 1/2 inch Superflexible Coax, RoHS PE39803-240](#)



7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch
Length Using 1/2 inch Superflexible Coax, RoHS

TECHNICAL DATA SHEET

PE39803-240

VSWR	1.11:1
Insertion Loss	0.06 dB

Mechanical Specifications

Temperature

Temperature Operating Range	-40 to +80 deg C
-----------------------------	------------------

Size

Length	240 in [609.6 cm]
Diameter	0.535 in [13.59 mm]
Weight	0.129 lbs [58.51 g]
Cable Color	Black
One Time Minimum Bend Radius	0.6 in [15.24 mm]
Repeated Minimum Bend Radius	1.18 in [29.97 mm]

Cable

Cable Type	1/2" Superflexible
Inner Conductor Type	Solid
Cable Inner Conductor	Copper Clad Aluminum
No of Shields	1
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter	0.535 in [13.59 mm]

Connector 1

Type	7/16 DIN Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Outer Conductor Material and Plating	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size	32 mm
Torque	18.417 ft-lbs [24.97 Nm]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Connector 2

Type	7/16 DIN Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Outer Conductor Material and Plating	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size	32 mm
Torque	18.417 ft-lbs [24.97 Nm]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch Length Using 1/2 inch Superflexible Coax, RoHS PE39803-240](#)



7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch
Length Using 1/2 inch Superflexible Coax, RoHS

TECHNICAL DATA SHEET

PE39803-240

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant Yes

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

How to Order

Part Number Configuration:

PE39803-240

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE39803-240-12 = 12 inches long cable
PE39803-240-100cm = 100 cm long cable

7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch Length Using 1/2 inch Superflexible Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch Length Using 1/2 inch Superflexible Coax, RoHS PE39803-240](http://www.pasternack.com/7-16-DIN-Male-to-7-16-DIN-Male-Low-PIM-Cable-240-Inch-Length-Using-1-2-Inch-Superflexible-Coax-RoHS-PE39803-240)

URL: <http://www.pasternack.com/7-16-MALE-7-16-MALE-1-2-Super-Flexible-Cable-PE39803-240-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39803-240 CAD Drawing

7/16 DIN Male to 7/16 DIN Male Low PIM Cable 240 Inch
Length Using 1/2 inch Superflexible Coax, RoHS

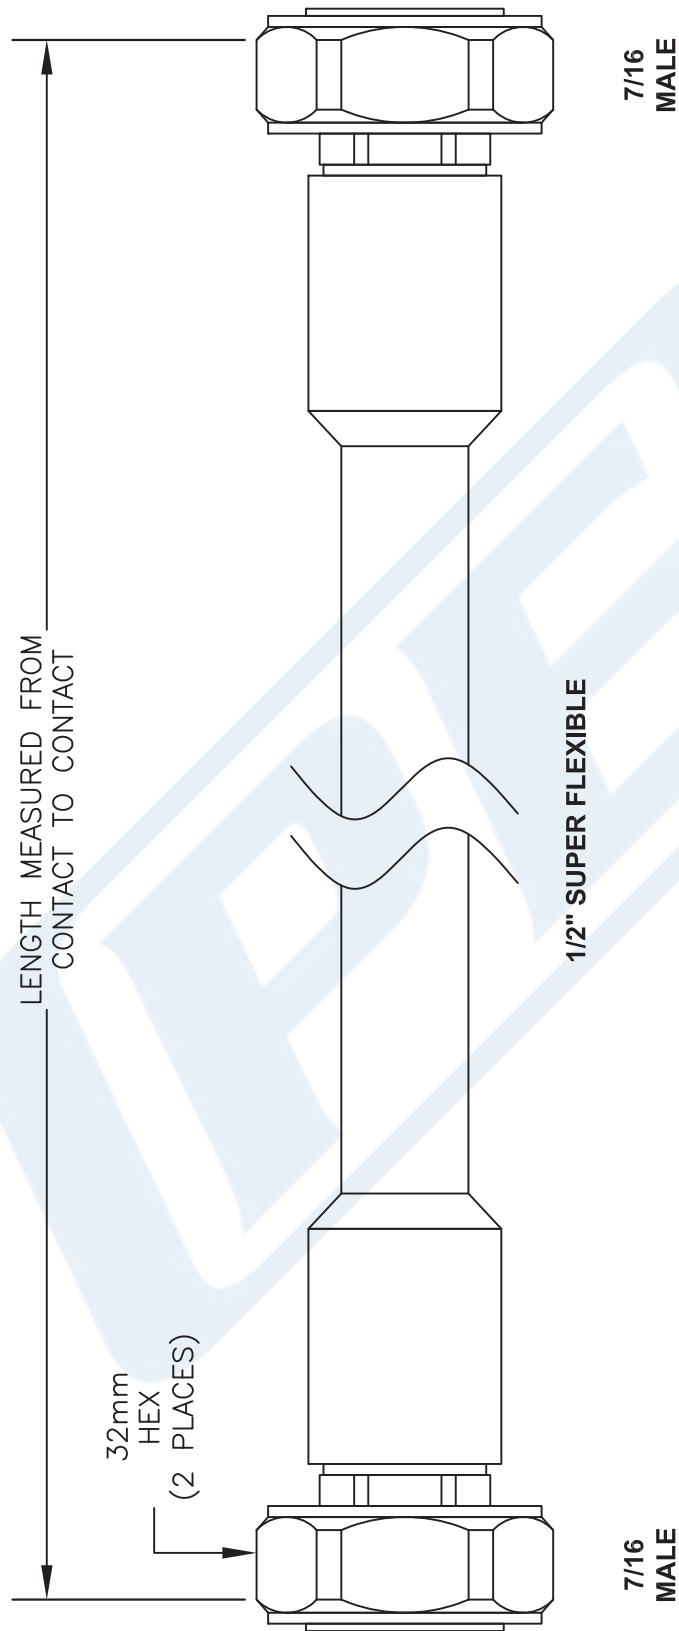

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE

PE39803

FSCM NO. 53919

2233

SIZE A

SCALE N/A

CAD FILE 120314

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com