



N Male to N Male Cable 60 Inch Length Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3C0033-60

N Male to N Male Cable 60 Inch Length Using LMR-400 Coax

Configuration

Connector 1	N Male
Connector 1 Specification	MIL-STD-348A
Connector 2	N Male
Connector 2 Specification	MIL-STD-348A
Cable Type	LMR-400
Impedance, Ohms	50

Mechanical Specifications

Cable Assembly

Cable Type	LMR-400
------------	---------

Temperature

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85

Size

Length, in [cm]	60 [152.4]
Diameter, in [mm]	0.827 [21.01]
Weight, lbs [g]	0.244 [110.68]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	1 [25.4]
Repeated Minimum Bend Radius, in [mm]	4 [101.6]

Cable

No of Shields	2
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.405 [10.29]

Connector 1

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Inner Conductor Plating Specification	70µ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100µ in. minimum
Dielectric Type	Teflon

Connector 2

Type	N Male
Configuration	Straight

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 60 Inch Length Using LMR-400 Coax PE3C0033-60](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



N Male to N Male Cable 60 Inch Length Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3C0033-60

Inner Conductor Material and Plating
Inner Conductor Plating Specification
Body Material and Plating
Body Plating Specification
Dielectric Type

Brass, Silver
70μ in. minimum
Brass, Nickel
100μ in. minimum
Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:


Values at 25 °C, sea level


N Male to N Male Cable 60 Inch Length Using LMR-400 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Cable 60 Inch Length Using LMR-400 Coax PE3C0033-60](#)

URL: <http://www.pasternack.com/n-male-n-male-lmr400-cable-assembly-pe3c0033-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

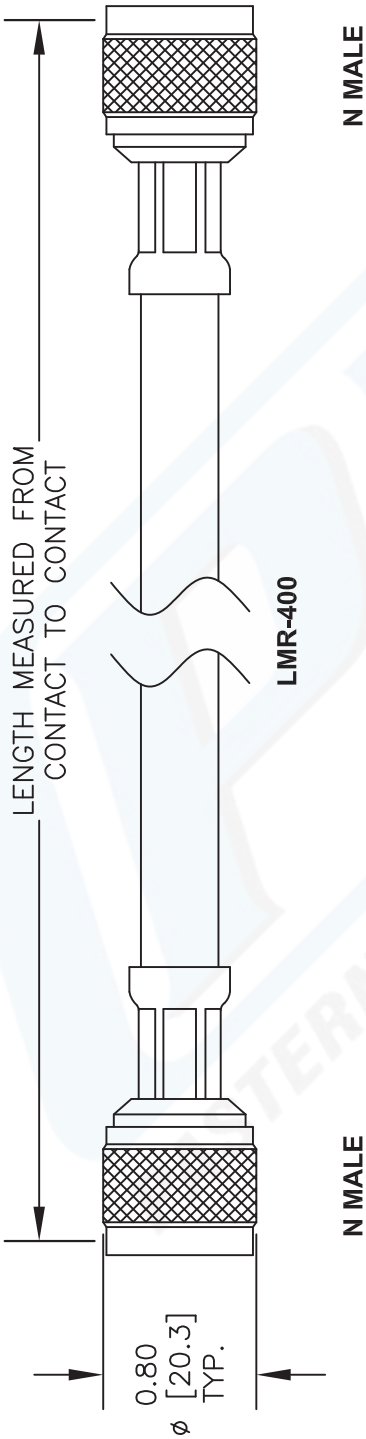

How To Order			Part # Ext.		Length In Inches		Part # Ext.		Length In Centimeters	
Part Number Configuration			Examples							
PE3 <input type="text" value="zzz"/> <input type="text" value="yy"/> - <input type="text" value="xx"/> <input type="text" value="uu"/>			PE3000LF-100		12"		-25CM		25Cm	
			PE3000-100		24"		-50CM		50Cm	
00 - 99999			PE3000LF-100CM		36"		-75CM		75Cm	
LF = RoHS Compliant			PE3000-100CM		48"		-100CM		100Cm	
< Blank > = Standard					60"		-125CM		125Cm	
Note: LF applies only to RF cables			Length		Custom Length		-xxCM		Custom Length	
<div><div></div><div>PASTERNAK®</div></div> <div>Pasternack Enterprises, Inc. P.O. Box 16759 Irvine CA 92623 Phone: (949) 261-1920 Fax: (949) 261-7451 Website: www.pasternack.com E-Mail: sales@pasternack.com</div>					DWG TITLE		<div>NOTES:</div> <div>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.</div> <div>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.</div> <div>3. DIMENSIONS ARE IN INCHES [mm].</div> <div>4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.</div>			
					FSCM NO. 53919					
					PE3C0033					
					FSCM NO. 53919		CAD FILE		013113	
					SCALE N/A		SIZE A		2233	