



SMA Female 4 Hole Flange to MMCX Plug Right Angle Cable 24 Inch Length Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C0064-24

SMA Female 4 Hole Flange to MMCX Plug Right Angle Cable 24 Inch Length Using LMR-100 Coax

Configuration

| | |
|---------------------------|--------------------------|
| Connector 1 | SMA Female 4 Hole Flange |
| Connector 1 Specification | MIL-C-39012 |
| Connector 2 | MMCX Plug Right Angle |
| Connector 2 Specification | BS EN 122340 |
| Cable Type | LMR-100A |
| Impedance, Ohms | 50 |

Mechanical Specifications

Cable Assembly

| | |
|------------|----------|
| Cable Type | LMR-100A |
|------------|----------|

Temperature

| | |
|------------------------------------|------------|
| Temperature Operating Range, deg C | -40 to +85 |
| Temperature Storage Range, deg C | -70 to +85 |

Size

| | |
|---------------------------------------|--------------|
| Length, in [mm] | 24 [609.6] |
| Diameter, in [mm] | 0.5 [12.7] |
| Weight, lbs [g] | 0.04 [18.14] |
| Cable Color | Black |
| One Time Minimum Bend Radius, in [mm] | 0.25 [6.35] |
| Repeated Minimum Bend Radius, in [mm] | 1 [25.4] |

Cable

| | |
|--------------------------|-------------|
| No of Shields | 2 |
| Dielectric Type | PE |
| Jacket Material | PVC |
| Jacket Diameter, in [mm] | 0.11 [2.79] |

Connector 1

| | |
|---------------------------------------|--------------------------|
| Type | SMA Female 4 Hole Flange |
| Configuration | Straight |
| Mount Method | 4 Hole Flange |
| Inner Conductor Material and Plating | Gold |
| Inner Conductor Plating Specification | MIL-G-45204 |
| Body Material and Plating | Brass, Nickel |
| Dielectric Type | Teflon |

Connector 2

| | |
|---------------|-----------------------|
| Type | MMCX Plug Right Angle |
| Configuration | Right Angle |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to MMCX Plug Right Angle Cable 24 Inch Length Using LMR-100 Coax PE3C0064-24](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Female 4 Hole Flange to MMCX Plug Right Angle
Cable 24 Inch Length Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C0064-24

Inner Conductor Material and Plating
Inner Conductor Plating Specification
Body Material and Plating
Body Plating Specification
Dielectric Type

Brass, Gold
30μ in. minimum
Brass, Gold
3μ in. minimum
Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level


SMA Female 4 Hole Flange to MMCX Plug Right Angle Cable 24 Inch Length Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to MMCX Plug Right Angle Cable 24 Inch Length Using LMR-100 Coax PE3C0064-24](http://www.pasternack.com/sma-female-mmcx-plug-lmr100-cable-assembly-pe3c0064-24-p.aspx)

URL: <http://www.pasternack.com/sma-female-mmcx-plug-lmr100-cable-assembly-pe3c0064-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE3C0064-24 CAD Drawing
SMA Female 4 Hole Flange to MMCX Plug Right Angle
Cable 24 Inch Length Using LMR-100 Coax

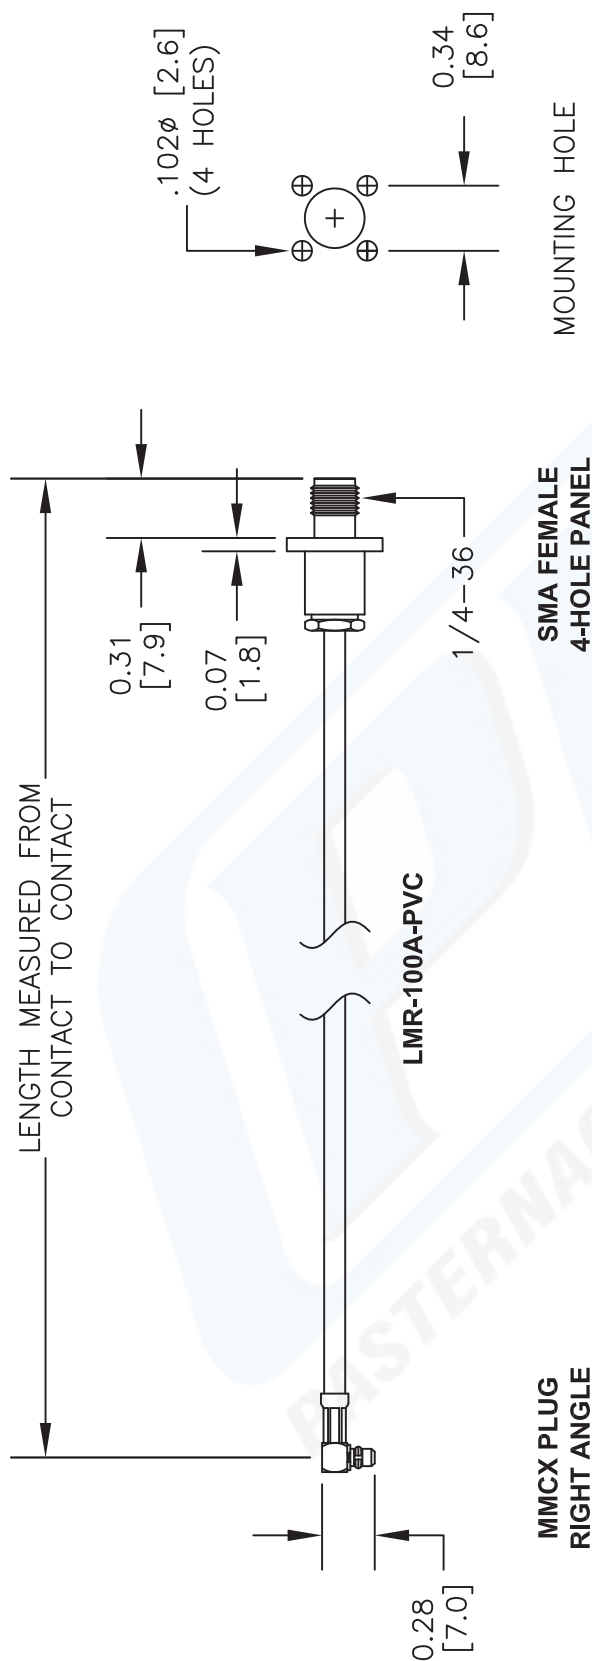

| How To Order | | | | | |
|--|--|--|------------------|-------------|-----------------------|
| <div>Part Number Configuration</div> <div>PE3 <div>zzz</div> <div>yy</div> - <div>xx</div> <div>uu</div></div> <div>00 - 99999</div> <div>LF = RoHS Compliant < Blank > = Standard</div> <div>Note: LF applies only to RF cables</div> | | <div>Examples</div> <div>PE3000LF-100</div> <div>PE3000-100</div> <div>PE3000LF-100CM</div> <div>PE3000-100CM</div> <div>CM = Centimeters < Blank > = Inches</div> <div>Length</div> | | | |
| | | Part # Ext. | Length In Inches | Part # Ext. | Length In Centimeters |
| | | -12 | 12" | -25CM | 25Cm |
| | | -24 | 24" | -50CM | 50Cm |
| | | -36 | 36" | -75CM | 75Cm |
| | | -48 | 48" | -100CM | 100Cm |
| | | -60 | 60" | -125CM | 125Cm |
| | | -xx | Custom Length | -xxCM | Custom Length |

**PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE
PE3C0064

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

| | | | | |
|----------------|-----------------|-----------|--------|------|
| FSCM NO. 53919 | CAD FILE 020513 | SCALE N/A | SIZE A | 2233 |
|----------------|-----------------|-----------|--------|------|