



1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax

TECHNICAL DATA SHEET

PE3C0441

1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax

Configuration

Connector 1	1.0/2.3 Jack Bulkhead
Connector 2	1.0/2.3 Jack Bulkhead
Cable Type	RG316
Impedance, Ohms	50
Maximum VSWR	1.3:1

Mechanical Specifications

Cable Assembly

Cable Type	RG316
Diameter, in [mm]	0.098 [2.49]
Weight, lbs [g]	0.023 [10.43]
Cable Color	Tan

Cable

No of Shields	1
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter, in [mm]	0.098 [2.49]

Connector 1

Type	1.0/2.3 Jack Bulkhead
Configuration	Straight
Mount Method	Bulkhead
Inner Conductor Material and Plating	Gold
Body Material and Plating	Brass, Gold
Dielectric Type	PTFE

Connector 2

Type	1.0/2.3 Jack Bulkhead
Configuration	Straight
Mount Method	Bulkhead
Inner Conductor Material and Plating	Gold
Body Material and Plating	Brass, Gold
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax PE3C0441](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax

TECHNICAL DATA SHEET

PE3C0441

Plotted and Other Data

Notes:

Values at 25 °C, sea level

1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax PE3C0441](#)

URL: <http://www.pasternack.com/1.0-2.3-jack-1.0-2.3-jack-rg316u-cable-assembly-pe3c0441-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE3C0441 CAD Drawing

1.0/2.3 Jack Bulkhead to 1.0/2.3 Jack Bulkhead Cable Using RG316 Coax

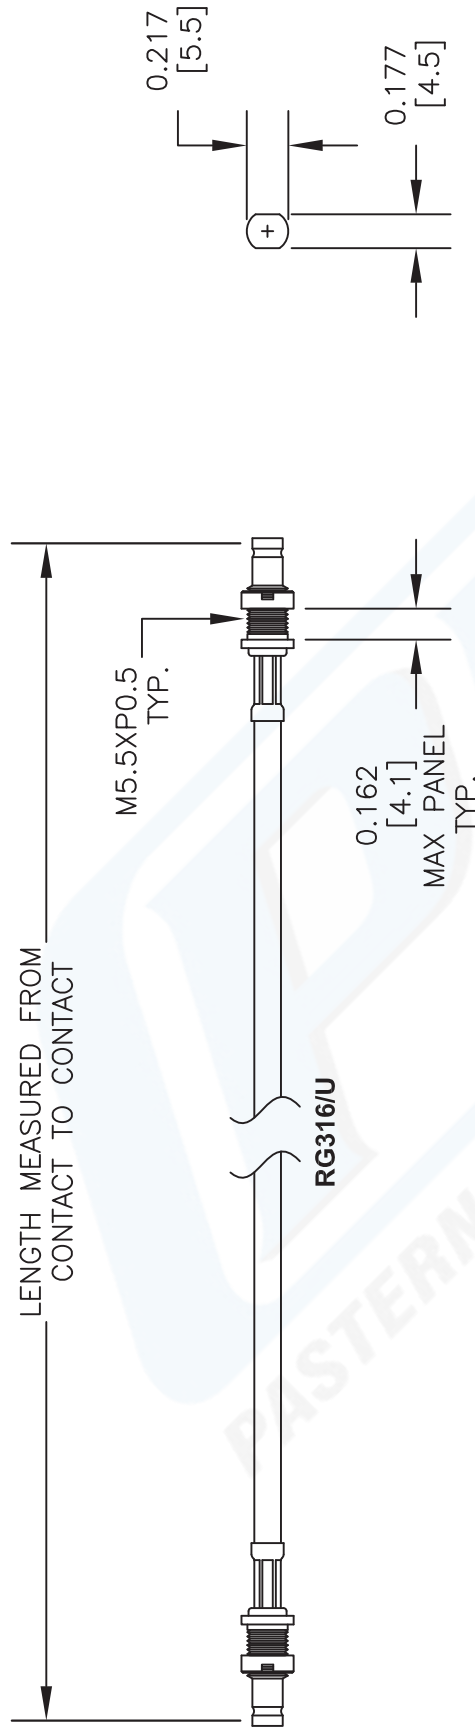

1.0/2.3 JACK
BULKHEAD

1.0/2.3 JACK
BULKHEAD

MOUNTING HOLE

How To Order					
Part Number Configuration PE3 zzz yy - xx uu 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables	Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM				
		-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-xx	Custom Length	-xxCM	Custom Length



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE3C0441

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

FSCM NO. 53919

CAD FILE 091813

SCALE N/A

SIZE A

2233